

**Polar Bearier
Slip-On Insulating Cover**

	"A" Width	Height	Depth
PBB-22	22"	24"	6"
PBB-30	28"	24"	6"
PBB-45	46"	24"	6"
PBB-60	56"	24"	6"
PBB-40HP	40"	36"	6"
PBB-60HP	60"	36"	6"
PBB-75HP	72"	36"	6"
PBB-90HP	90"	36"	6"
PBB-20HP	24"	46"	6"

- Polar Bearier helps prevent freeze damage to backflow devices.
- Reduces liability by cushioning backflow devices.
- Reduces time and materials wasted on annual backflow wrapping.
- Secured with brass grommets on both sides.
- Can be installed inside existing backflow enclosures.
- Provides an aesthetic alternative to exposed backflow devices.

**R-19 Insulation Value**

Similar to how insulation works in the walls of a home, Polar Bearier covers prevent freezing cold air from reaching the pipes of backflow devices. Polar Beariers protect to a R19 insulation rating using Radiant Barrier Foil (RBF) inserted between acrylic polyester and air bubble pack. These layers form an insulated bag impervious to moisture.



SOLAR SYNC COVER

Solar Sync Cover is designed to protect Solar Sync switches from vandalism and made to attach to StrongBox enclosures with gasket seal.

SRSE**RAIN SWITCH ENCLOSURE**

The Rain Switch Enclosure is designed to protect WCS and Mini-Click Rain Switches from vandalism.

RGVRSS**POLE MOUNT RAIN SWITCH ENCLOSURE**

Mounts to 2" galvanized pipe. Designed to protect WCS and Mini-Click Rain Switches from vandalism.

RGVRSS-P**36 & 52 STATION CONTROLLER
SUBASSEMBLY**

This package includes 120 volt, 15 amp, ground fault protected duplex box with receptacle and locking switch; flexible conduit and conduit; and terminal strips with placards.

CSA 36 Stations**CSA-52** 52 Stations**THERMOSTATICALLY CONTROLLED FAN**

The fan is easily installed and can be adjusted in the field to help maintain desired enclosure temperature.

OPT-FAN

TIME CLOCK


- Available for MPS, CSP and DSP series meters
- Intermatic ET-Series 1, 2, and 4 channel options available

**PHOTOCELLS**

- Available on MPS and CSP series meter pedestals
- Ripley 6390TF with bypass switch included

**CONTACT BLOCK**

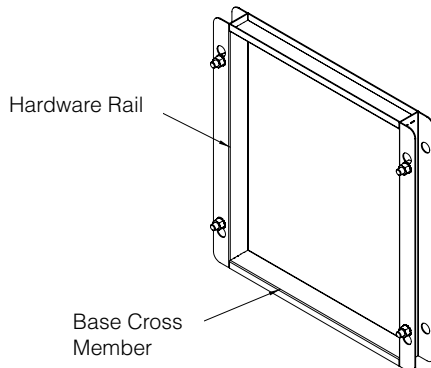
- GE 30A Modular contactors available on MPS and CSP meter pedestals
- 2P, 4P, 6P, 8P, 10P, and 12P options available
- Meter Pedestals can utilize two (2) GE Modular Contactors individually configured for two (2) to twelve (12) poles each

**BRANCH BREAKERS**

- Many options available. Contact factory for specs

**METER MOUNTING BASE**

The go-to solution for installing your StrongBox meter pedestal. 100% Stainless Steel construction means long lasting durability and corrosion resistance.

**MPS-BASE**

For MPS meter pedestals

- 20" Wide 18" Deep 3.25" High

MPE-BASE

For MPE meter pedestal and enclosure

- 29.5" Wide 18" Deep 3.5" High

CSP-B BASE

For CSP meter pedestal

- 16.5" Wide 15.75" Deep 1.5" High

DSP BASE

For DSP meter pedestal

- 22.25" Wide 12.25" Deep 1.5" High