

SB-16SSW

Dimensions	Width	Height	Depth
Overall	16"	18"	11"
Usable Space	16"	14"	7"
Backboard	16"	14"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X

X Room for one controller

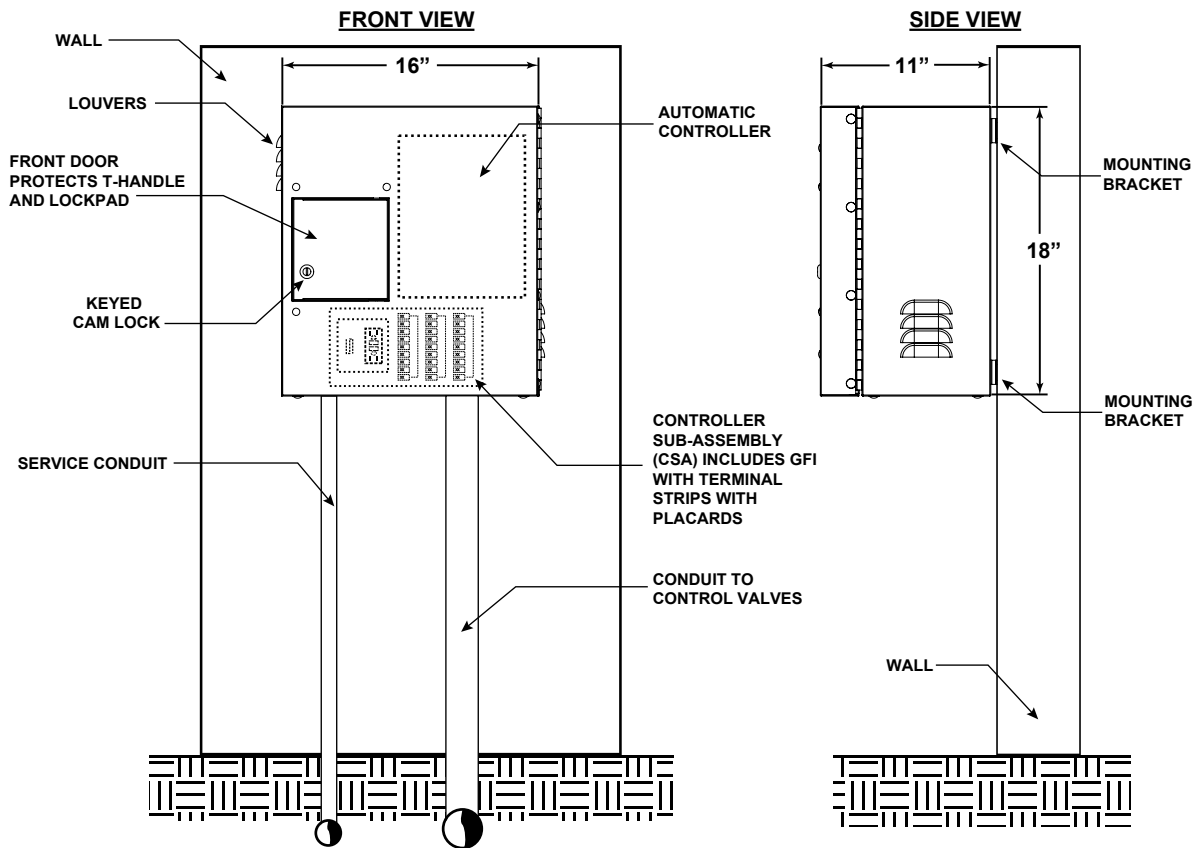

Options for SB-16SSW (for complete accessories, see page 36)



PED-16SSW PEDESTAL RISER

For optional floor mounting. Securely fastens to bottom of enclosure with concealed bolts.

Overall Dims: 16" x 5" x 8"

Conduit Cutout: 13" x 5"

SB-18SSW

Dimensions	Width	Height	Depth
Overall	19"	36"	12"
Usable Space	16"	32"	8"
Backboard	16"	32"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
*DX2	6-48	X
*DX3	8-96	X
*Eagle Plus	8-48	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
*ICC2	8-54	X
*HCC	8-54	X
*ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
PL4800	12-48	X
SL1600	4-16	X
SL1620	20	X
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

- X Room for one controller
- * Contact factory for controller specific backboards and trays

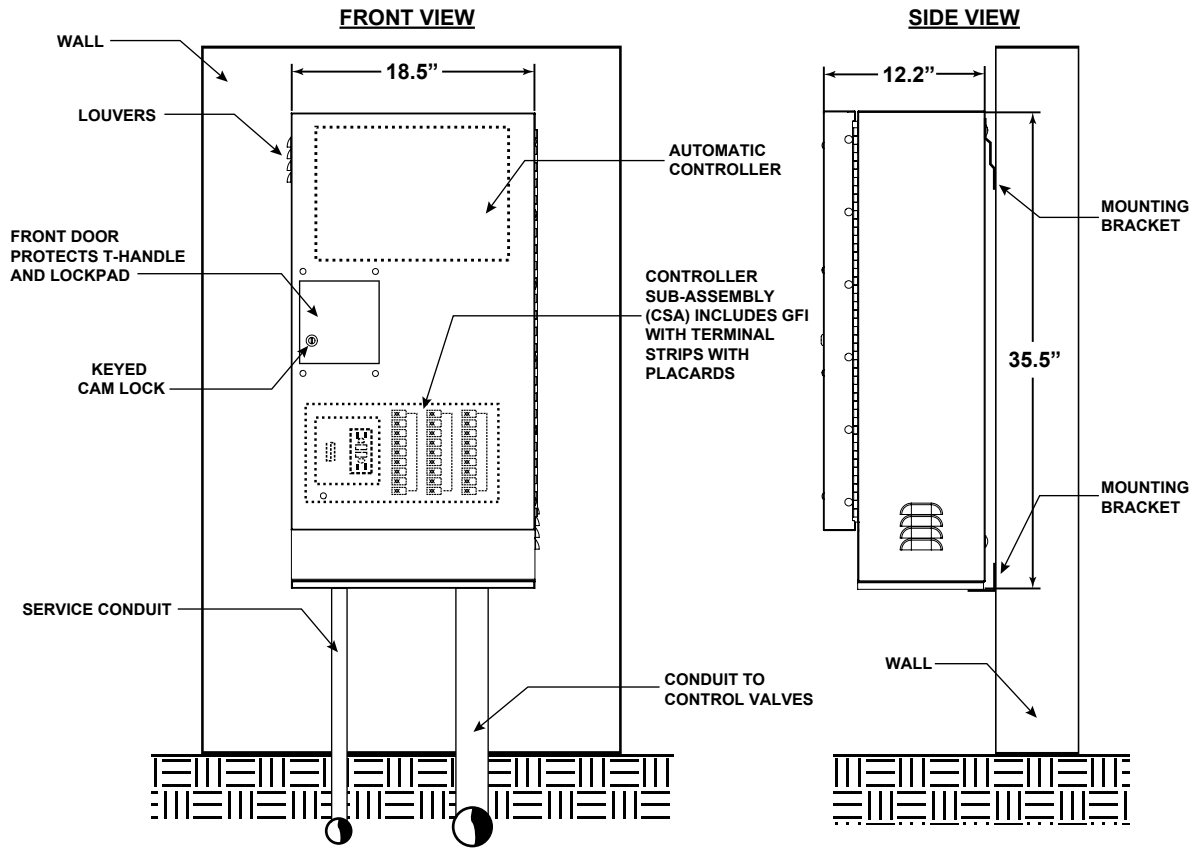

For complete accessories, see page 36

SB-24SSW

Dimensions	Width	Height	Depth
Overall	25"	36"	12"
Usable Space	22"	33"	8"
Backboard	22"	33"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	X
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

X Room for one controller

XX Room for two controllers

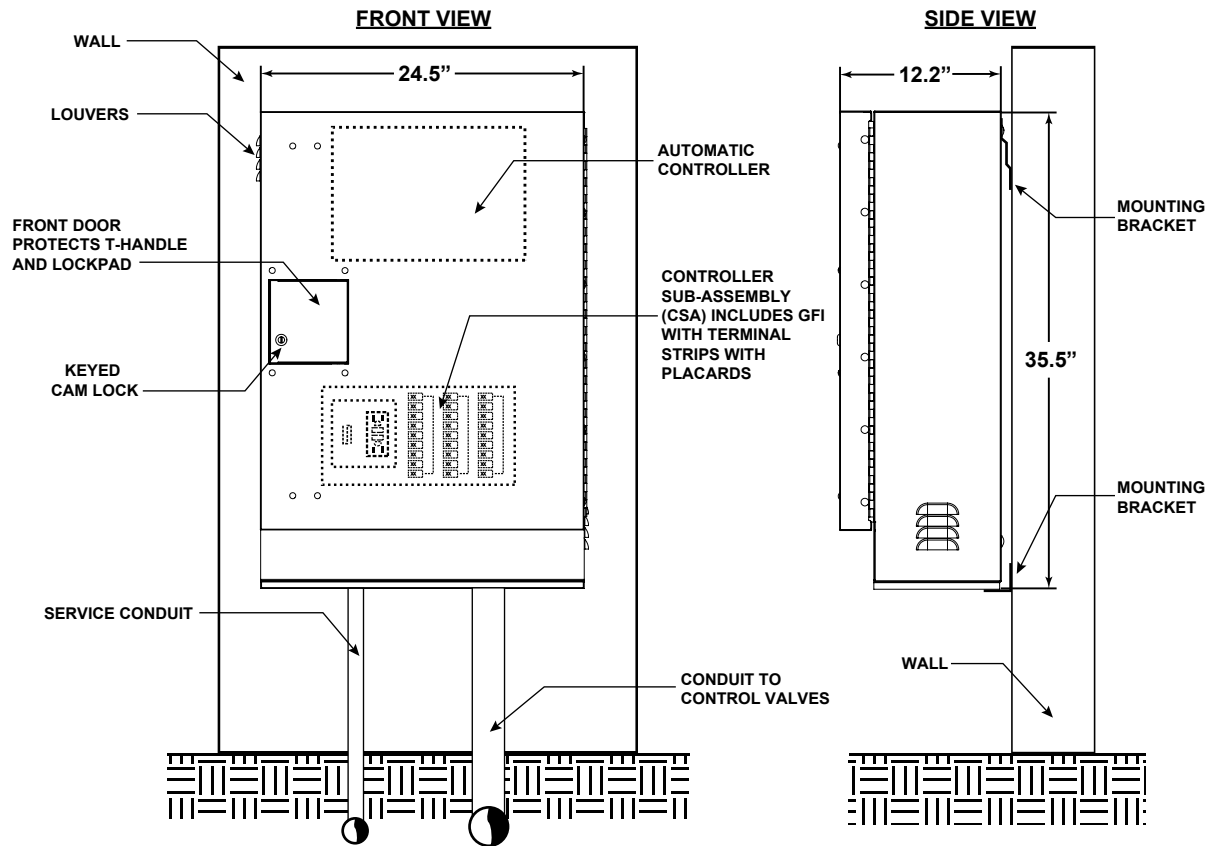

For complete accessories, see page 36

SB-36SSW

Dimensions	Width	Height	Depth
Overall	37"	36"	12"
Usable Space	32"	32"	8"
Backboards (2)	16"	32"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Two Pre-Drilled Removable Backboards Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	XX
ESP-SAT	40	XX
ESP-SITE SAT	40	XX
ESP-LXME2	12-48	XX
ESP-LXIVM	60-240	XX
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	XX
RME Eagle EG	6-36	XX
RME Eagle-I central	6-36	XX
Toro	Stations	Capacity
TMC-424	4-24	XX
Sentinel WallMount	12-48	XX
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	XX
I-Core-600-M	6	XX
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	XX
PRO-HC	6-24	XX
* ICC2	8-54	XX
* HCC	8-54	XX
* ACC2 Series	12-54	XX
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	XX
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	XX
SL9648TW	48	XX
SL9696TW	96	XX
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	XX
Calsense	Stations	Capacity
CS3000	8-48	XX

XX Room for two controllers

- * Contact factory for controller specific backboards and trays

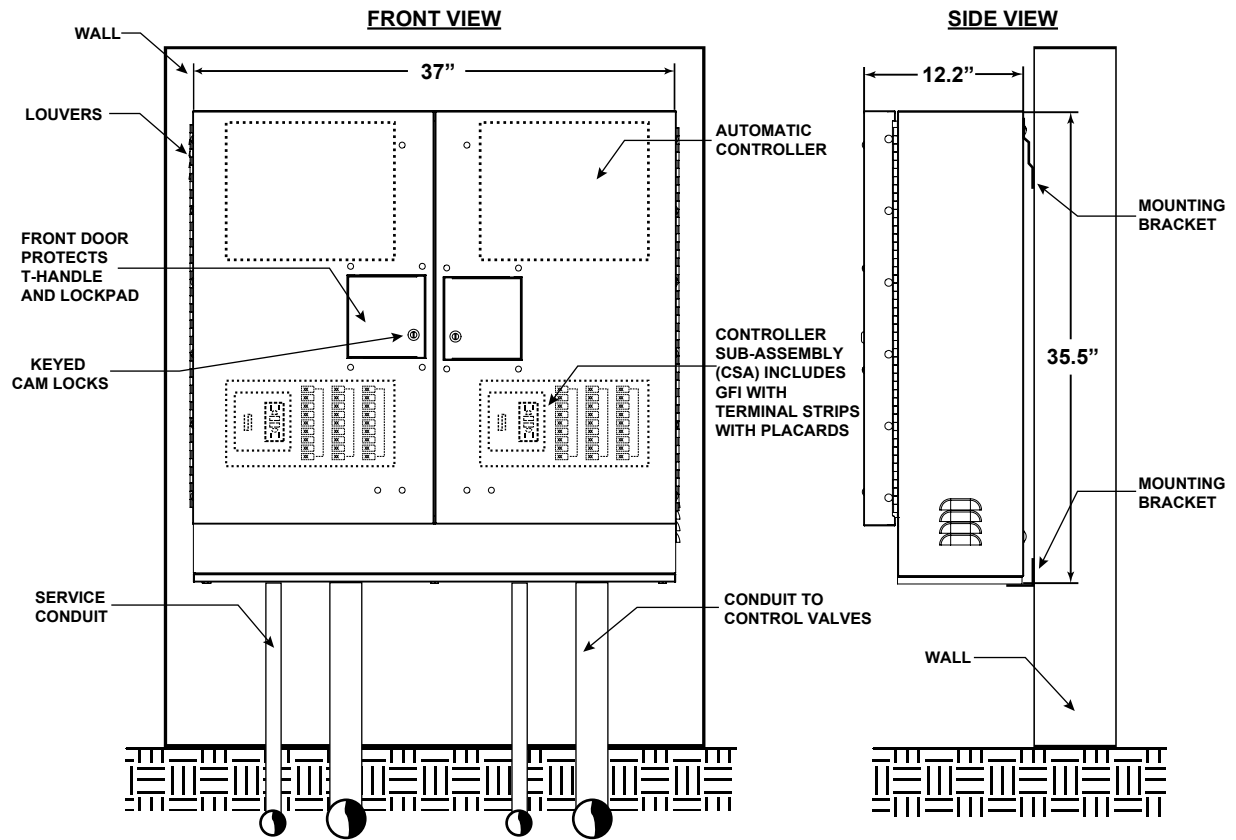

For complete accessories, see page 36