

Aluminum Clamshell - Ventilated

- ASSE 1060 Rated
- Marine Grade Aluminum
- Stainless Steel Hardware
- Solid Sheet Construction
- Two-Piece Construction Splits at Center
- Latch Rod Locking System Accepts Padlock
- Punched Holes for Ventilation
- 5-Year Limited Warranty




Enclosure Sizes

Part Number	Width	Height	Depth	Weight
SBBC-60ALHP	61"	39"	24"	118 lbs
Inside Dimensions	58.0"	37.5"	21.5"	--
SBBC-75ALHP	76"	39"	24"	128 lbs
Inside Dimensions	73.0"	37.5"	21.0"	--
SBBC-90ALHP	91"	39"	24"	158 lbs
Inside Dimensions	88.0"	37.5"	21.5"	--
SBBC-110ALHP	111"	39"	24"	185 lbs
Inside Dimensions	110.25"	37.25"	23.5"	--



Compatible Backflows (Chart displays commonly used backflows. For complete list, visit www.strongbox.com)

SBBC-60ALHP			SBBC-75ALHP		SBBC-90ALHP		SBBC-110ALHP	
	Model	Size	Model	Size	Model	Size	Model	Size
WILKINS	375	2 1/2" - 3"	350A - NRS Gate	4"	350A - NRS Gate	6"	375A NRS	8"
	350A OSY GV	2 1/2" - 3"	350A OSY Gate	4"	350A BFV	8"	--	--
	350AST OSY GV	2 1/2" - 3"	350A BFV	6"	350AST NRS Gate	8"	--	--
	350DA Flanged BFV	4"	350AST NRS Gate	6"	350AST BFV	8" - 10"	--	--
	350ADA GRVD OSY	2 1/2" - 3"	350AST BFV	6"	350DA Flanged BFV	8"	--	--
	350DA GRVD BFV	2 1/2" - 3"	350DA Flanged OSY	4"	350ADA GRVD BFV	8"	--	--
	375A OSY	2 1/2" - 3"	350DA Flanged BFV	6"	375A NRS Gate	6"	--	--
	375AST / W1	2 1/2" - 3"	350ADA GRVD OSY	4"	375A BFV	8"	--	--
	375ADA GRVD BFV	2 1/2" - 3"	375A NRS Gate	4"	375ADA GRVD BFV	8"	--	--
	375ADA GRVD OSY	2 1/2" - 3"	375A OSY Gates	4"	375ASTDA BFV	8" - 10"	--	--
	375ASTDA OSY	2 1/2" - 4"	375A BFV	6"	--	--	--	--
	--	--	375AST / W1	6"	--	--	--	--
	--	--	375ADA GRVD BFV	4"	--	--	--	--
	--	--	375ADA GRVD OSY	4"	--	--	--	--
	--	--	375ASTDA BFV	6"	--	--	--	--
FEBCO	860 / LF860	2 1/2"	860 / LF860	3"	--	--	LF860 NRS	8"
	LF850-NRS	2 1/2"	LF850-NRS	3" - 4"	--	--	--	--
	LF850-OSY	2 1/2"	LF850-OSY	3" - 4"	--	--	--	--
	LF856-OSY	2 1/2"	LF856OSY	3" - 4"	--	--	--	--
	LF866-OSY	2 1/2"	LF866OSY	3" - 4"	--	--	--	--
	LF886V - N/Z	2 1/2" - 4"	--	--	--	--	--	--

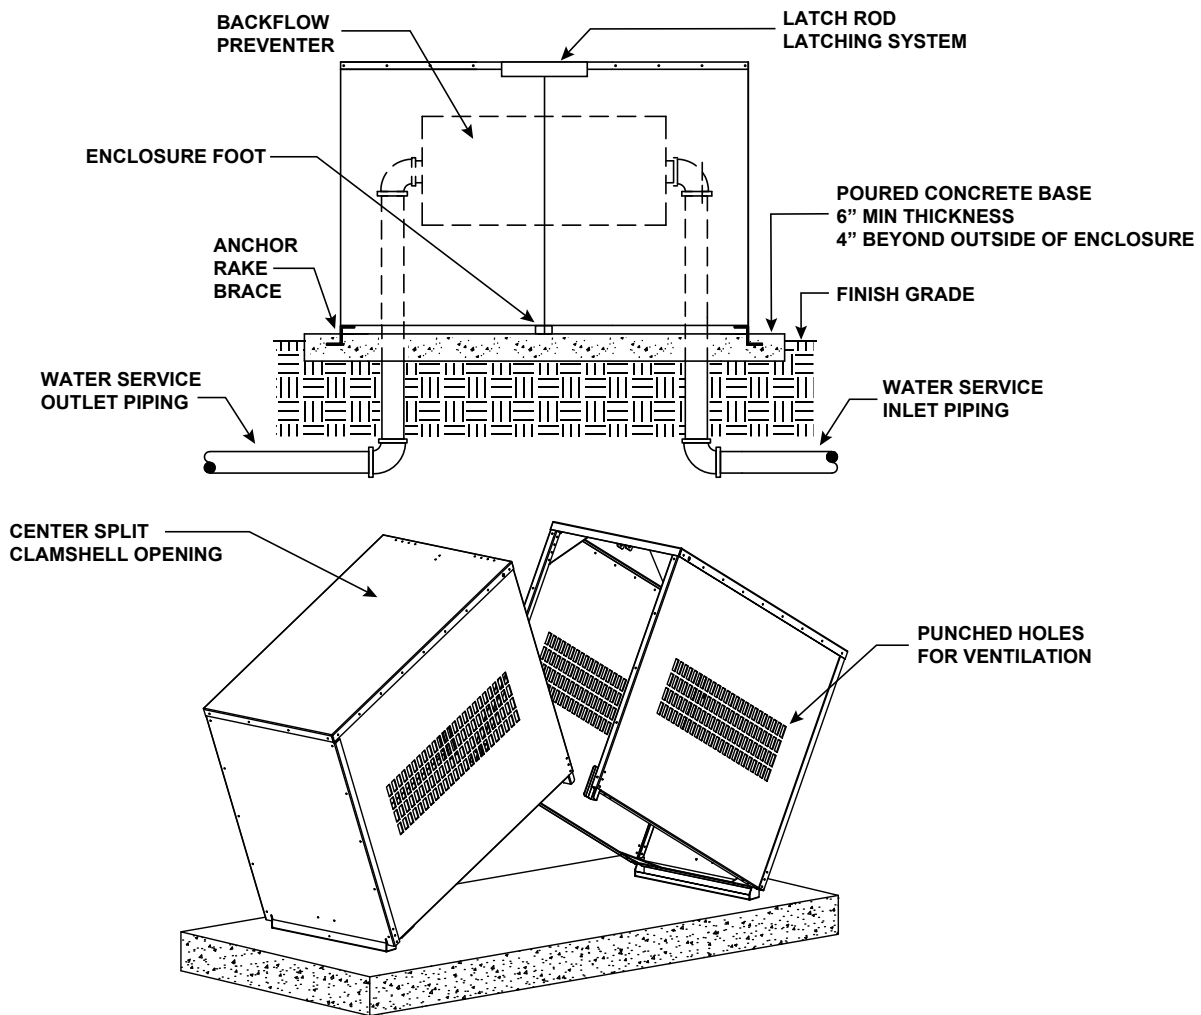

Options for Aluminum Clamshell Enclosures (for complete accessories, see page 70)



**POLAR BEARIER
INSULATING COVER**

Protects from frost with R-30 insulation rating.

Aluminum Clamshell - Solid

- ASSE 1060 Rated
- Marine Grade Aluminum
- Stainless Steel Hardware
- Solid Sheet Construction
- Two-Piece Construction Splits at Center
- Latch Rod Locking System Accepts Padlock
- 5-Year Limited Warranty




Enclosure Sizes

Part Number	Width	Height	Depth	Weight
SBBC-60AL	60"	31"	25"	82 lbs.
Inside Dimensions	57.0"	27.5"	14.0"	--
SBBC-40ALHP	41"	39"	24"	88 lbs.
Inside Dimensions	38.0"	37.5"	21.5"	--
SBBC-40WALHP	41"	39"	28"	95 lbs.
Inside Dimensions	40.0"	37.25"	27.5"	--



Compatible Backflows (Chart displays commonly used backflows. For complete list, visit www.strongbox.com)

SBBC-60AL			SBBC-40ALHP		SBBC-40WALHP	
	Model	Size	Model	Size	Model	Size
WILKINS	350A NRS Gate	2 1/2" - 3"	475	2 1/2" - 3"	475	2 1/2" - 3"
	350A BFV	2 1/2" - 4"	--	--	--	--
	350AST NRS Gate	2 1/2" - 4"	--	--	--	--
	350AST OSY Gate	2 1/2" - 4"	--	--	--	--
	350AST BFV	2 1/2" - 4"	--	--	--	--
	350DA Flanged BFV	2 1/2" - 3"	--	--	--	--
	375A NRS Gate	2 1/2" - 3"	--	--	--	--
	375A BFV	2 1/2" - 4"	--	--	--	--
	375AST/ W1	2 1/2"	--	--	--	--
	375ADA GRV BFV	2 1/2" - 4"	--	--	--	--
	375ASTDA BFV	2 1/2" - 4"	--	--	--	--
FEBCO	--	--	LF880V NRS	2 1/2" - 6"	LF880V NRS	2 1/2" - 6"
WATTS	LF007 NRS	2 1/2" - 3"	957 NRS	2 1/2" - 3"	957 NRS	2 1/2" - 3"
	994 RP	2 1/2"	--	--	--	--
AMES DERINGER	C200 / C200N NRS	2 1/2" - 4"	Deringer 40	2" - 3"	Deringer 40	2" - 3"
	4000SS NRS RP	2 1/2" - 3"	Deringer 50	2 1/2" - 4"	Deringer 50	2 1/2" - 4"
	Deringer 20	6"	--	--	--	--

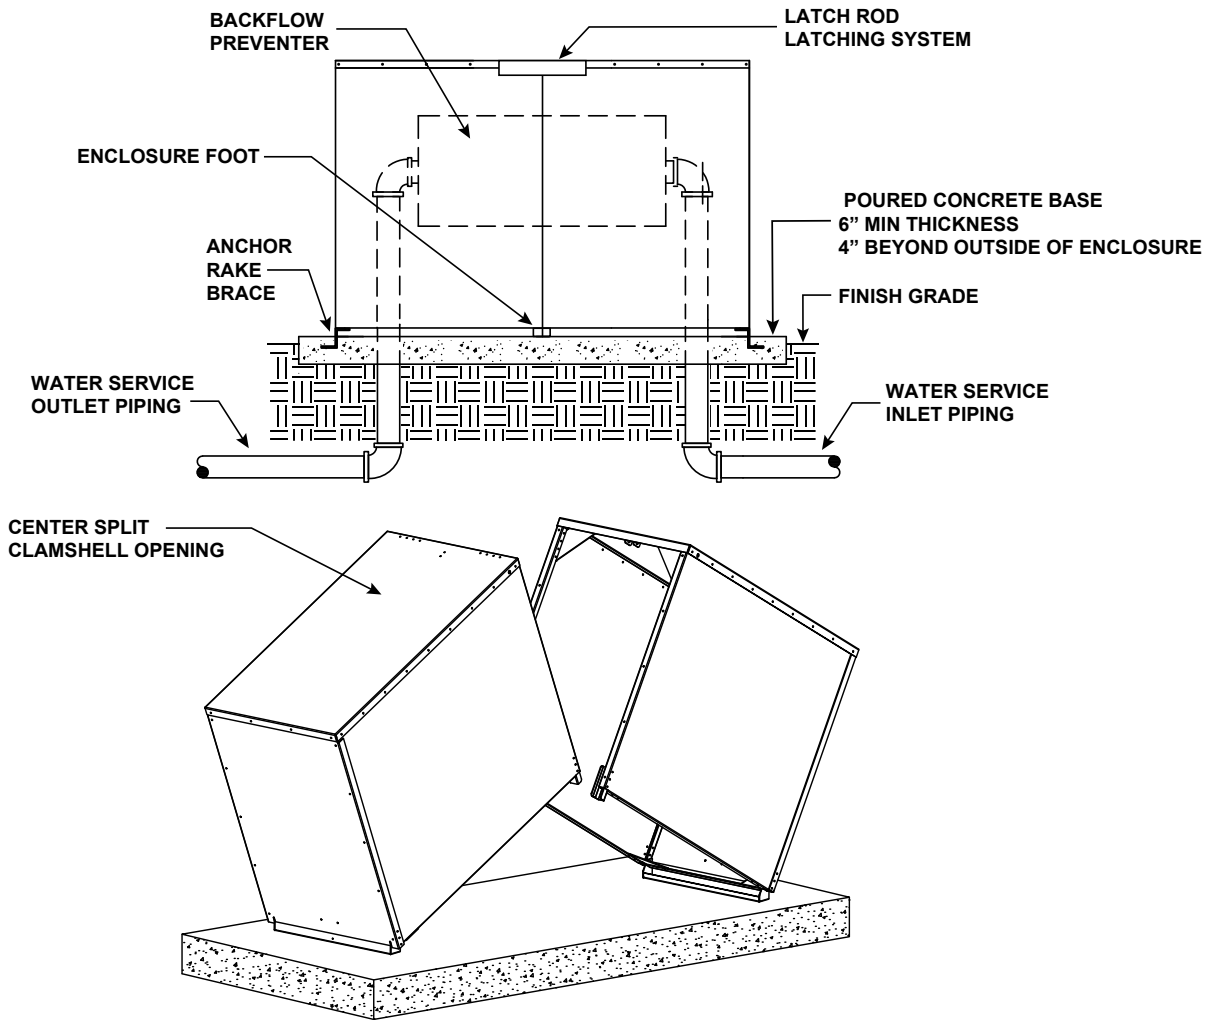

Options for Aluminum Clamshell Enclosures (for complete accessories, see page 70)



**POLAR BEARIER
INSULATING COVER**

Protects from frost with R-30 insulation rating.

QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



Part Number	Description		
QP-20BF	Used for SBBC-20SS		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	32" width	19" height	--
Conduit Cutout	18" width	10" height	--
QP-22BF	Used for SBBC-22AL SBBC-22SS SBBC-22CR		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	29" width	19" height	--
Conduit Cutout	14" width	11" height	--
QP-30BF	Used for SBBC-30AL SBBC-30SS SBBC-30CR		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	32" width	19" height	--
Conduit Cutout	24" width	10" height	--
QP-45BF	Used for SBBC-45AL SBBC-45SS SBBC-45CR		
Overall Dimensions	53" width	16" height	22" depth
Mounting Pad	49" width	19" height	--
Conduit Cutout	42" width	10" height	--

POLAR BEARIER BAGS

R-30 insulated cover to protect your backflow device from frost and moisture



Part Number	Description		
PBB-22	Used for SBBC-22AL SBBC-22SS SBBC-22CR		
Overall Dimensions	22" width	24" height	6" depth
PBB-30	Used for SBBC-30AL SBBC-30SS SBBC-30CR BC-30CR		
Overall Dimensions	28" width	24" height	6" depth
PBB-45	Used for SBBC-45AL SBBC-45SS SBBC-45CR BC-45CR		
Overall Dimensions	46" width	24" height	6" depth
PBB-60	Used for SBBC-60AL SBBC-60SS SBBC-60CR		
Overall Dimensions	56" width	24" height	6" depth
PBB-20HP	Used for SBBC-20SS		
Overall Dimensions	24" width	46" height	6" depth
PBB-40HP	Used for SBBC-40ALHP SBBC-40SS SBBC-40CR		
Overall Dimensions	40" width	36" height	6" depth
PBB-60HP	Used for SBBC-60ALHP SBBC-60SS SBBC-60CR		
Overall Dimensions	60" width	36" height	6" depth
PBB-75HP	Used for SBBC-75ALHP SBBC-75SS SBBC-75CR BC-75CR		
Overall Dimensions	72" width	36" height	6" depth
PBB-90HP	Used for SBBC-90ALHP		
Overall Dimensions	90" width	36" height	6" depth