

PWP

Dimensions	Width	Height	Depth
Overall	17"	31"	17"
Customer Section	15"	11"	7"

Features and Benefits

- For applications where electricity is metered upstream
- 100% Stainless Steel construction
- Utility section houses landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty


Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed




PWP Model Configurations: Choose one Blue number per section to create your part number (example PWP-11016-10)

Model No. - Phase	Main Amps	Breaker Pos - AIC Rating	Extra Options
PWP 1 - 1ph (120/240V)	06 - 60A	XX - No Dist	S - Switched Load Center
	10 - 100A	08 - 8 Pos	
	12 - 125A	16 - 16 Pos	
	15 - 150A		T - T-Fuse
	17 - 175A		
	20 - 200A		

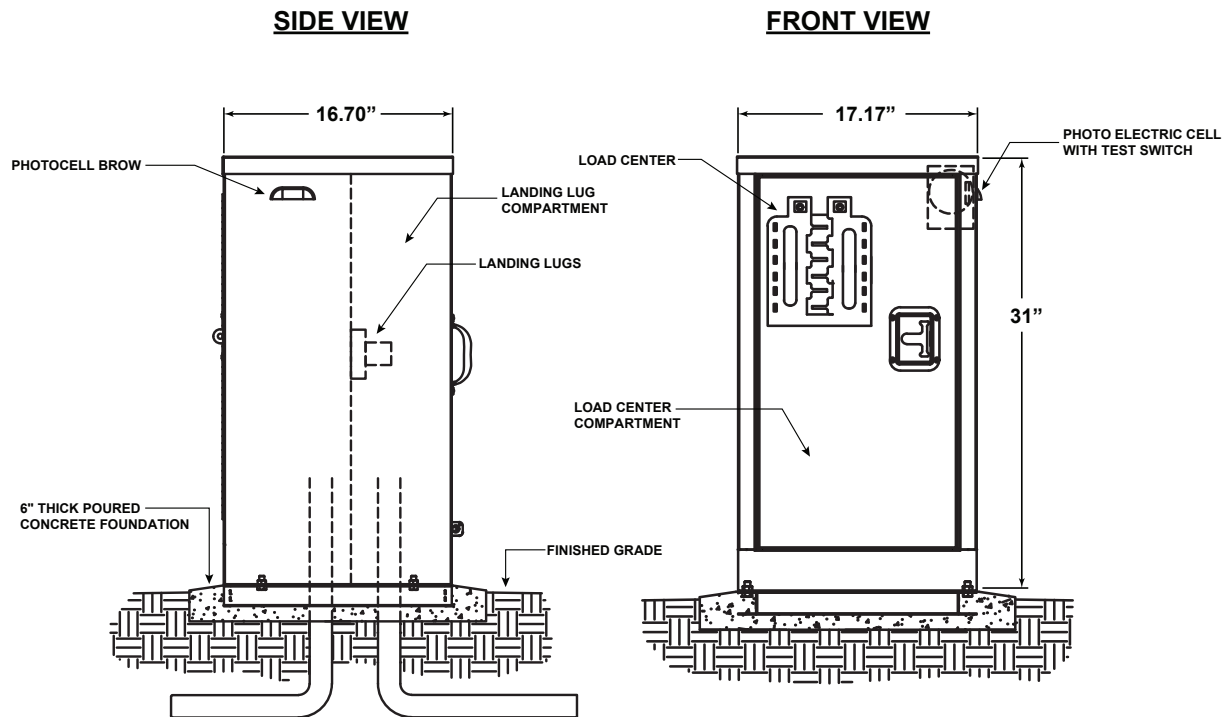

Accessories for PWP (for complete accessories, see page 26)

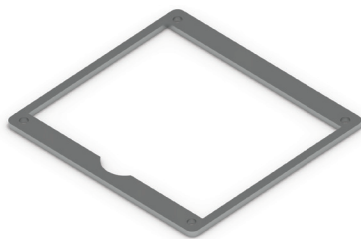

CSP-B BASE
MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.

Overall Dims: 17 x 2 x 16 in



QP-CSP
QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 38 x 18 x 25 in

Mounting Pad: 29 x 19 in

Conduit Cutout: 13 x 16 in



**ADDITIONAL
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors
- 18" Pedestal Riser