

ECS

Dimensions	Width	Height	Depth
Overall	16"	48"	18"
Customer Section	9"	14"	8"

Features and Benefits

- 100% Stainless Steel construction
- Separate compartments lift off front panel
- Utility section houses landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

Meter Section

- *Standard is Ringless Meter with Bypass Lever*
- Meter Socket:
 - 4 Jaw, 5 Jaw, and 7 Jaw


Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed




ECS Model Configurations: Choose one Blue number per section to create your part number (example ECS-11008-10L)

Model No. - Phase	Main Amps	Breaker Pos	AIC Rating	Extra Options
ECS				
1 - 1ph (120/240V)	06 - 60A	XX - No Dist	10 - 10,000	L - Lever Bypass
5 - 1ph (120/208V)	10 - 100A	08 - 8 Pos	22 - 22,000	U - Un-Metered
	12 - 125A	16 - 16 Pos	65 - 65,000	S - Switched Load Center
	15 - 150A		T - T-Fuse	
	17 - 175A			
	20 - 200A			

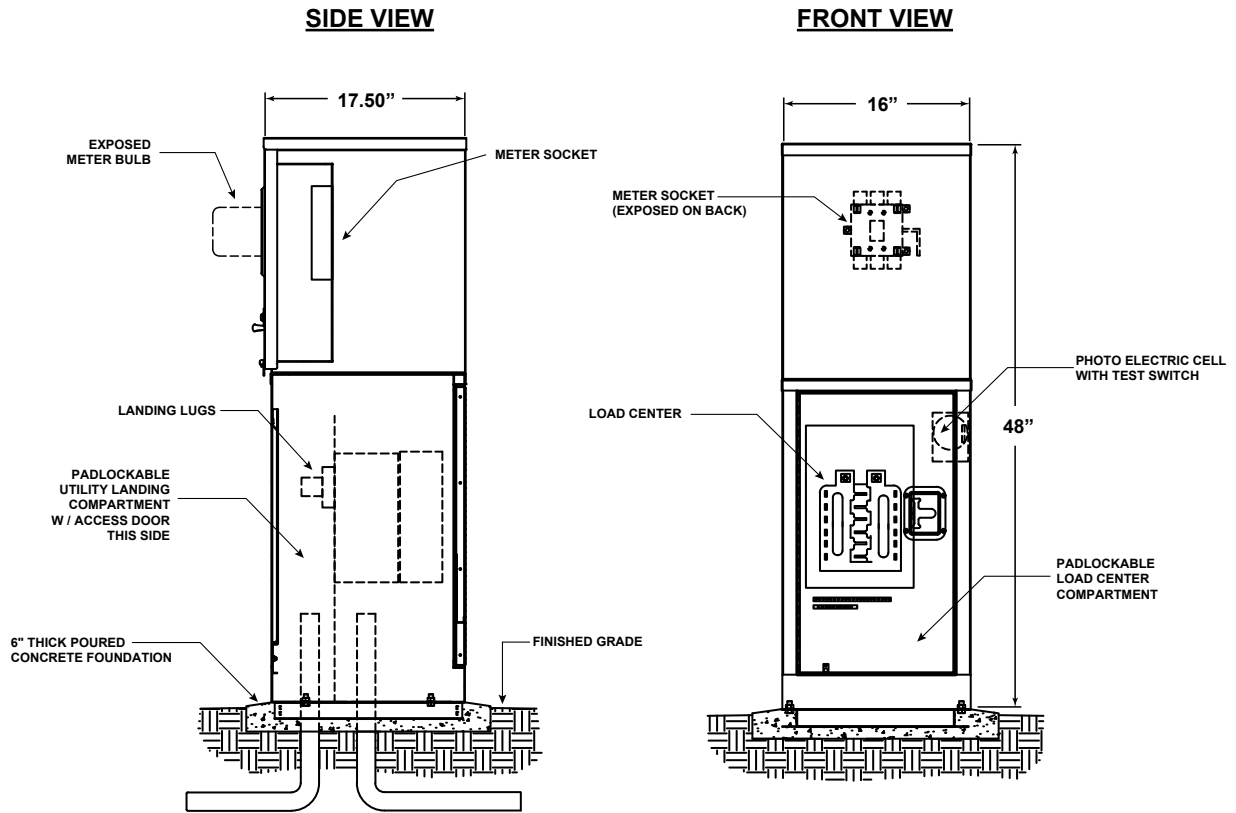

Accessories for ECS (for complete accessories, see page 26)

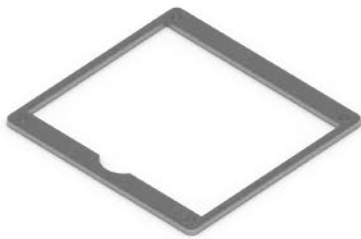

CSP-B BASE
MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.

Overall Dims: 17 x 2 x 16 in



QP-CSP
QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 38 x 18 x 25 in

Mounting Pad: 29 x 19 in

Conduit Cutout: 13 x 16 in



**ADDITIONAL
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors
- 18" Pedestal Riser

QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



Part Number	Description
QP-MPS	Used for MPS
QP-MPE	Used for MPE
QP-CSP	Used for CSP ECS PWP
QP-M	Used For SB24SS/240V

PEDESTAL RISER


Bring controls up to a more ergonomic height and prevent flood damage in high risk areas.



Part Number	Description
PED-CSP18	Used for CSP ECS PWP
SSP-PED	Used for SSP DSP
PED24SS-240V	Used for SB24SS/240V

MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.



Part Number	Description
MPS BASE	Used for MPS
MPE BASE	Used for MPE
CSP-B BASE	Used for CSP ECS PWP
CSP-C BASE	Used for SSP DSP ESS
XLP BASE	Used for XLP

MISC ACCESSORIES



BREAKERS, CONTACT BLOCKS, SURGE PROTECTORS

StrongBox offers a wide range of Siemens brand branch breakers, contact blocks and surge protectors.

TIME CLOCKS

Electronic time switch to program automatic events with to-the-minute accuracy

PHOTOCELLS

Dusk-to-dawn sensing module using natural light levels to control operations.

CUSTOM QUOTES

StrongBox Service Pedestals can be configured to meet your project's electrical requirements. Custom quotes are typically delivered within 1-2 business days depending on project complexity.

To get a custom quote, submit a panel schedule or one-line diagram. If not available provide the information to the right.

PROJECT SUBMITTAL

When receiving a custom meter quote from StrongBox, our in-house engineering team can also create a project submittal sheet with a hold for release purchase order.

Information required for custom quote:

- Voltage/Phase
- Max Amperage
- Distribution Size
- AIC Rating
- Additional breakers and accessories

StrongBox submittal packages include detailed project information such as:

- Wiring diagrams
- Product dimensions
- Component specifications
- General notes and construction details

Sample Submittal Sheet

[illegible]

Ready to get started? Email your project specifications to quotes@strongbox.com