



# PRODUCT CATALOG

VOL 26

SINGLE SERVICE  
PEDESTALS

DUAL SERVICE  
PEDESTALS

NON-METERED  
PEDESTALS

LOW-PROFILE  
SWITCHGEAR

CONTROL  
ENCLOSURES



## ABOUT US

StrongBox was founded in 1985 to meet the need for weather and vandal resistant enclosures in the irrigation and public works sectors. After decades of growth in our product offerings and customer base, StrongBox has become a leading manufacturer of stainless steel and aluminum enclosures serving a wide range of industries and applications, including our expansive growth in the utility sector. Headquartered in Mentor, Ohio, StrongBox serves customers throughout the United States and Canada through our extensive distribution network.



## QUALITY PRODUCTS & SERVICES

StrongBox manufactures the finest metal enclosures available for protecting electrical controls, power meters, pumps, backflow prevention devices, and more. Engineers, installers, and specifiers all look to StrongBox for top-notch products that last – even in harsh environments. And, by maintaining a wide variety of inventory for immediate shipping, we can provide you with the products you need, when you need them.

Our line of electrical service pedestals can be populated with various components and custom wiring to meet your project's needs. Our in-house engineering department and UL 508A panel shop ensure you receive a quality meter pedestal delivered within the best lead times in the industry!



|                                               |              |
|-----------------------------------------------|--------------|
| <b>Material Comparison.....</b>               | <b>2</b>     |
| <b>Service Pedestals.....</b>                 | <b>3-25</b>  |
| <b>Single Meter Service Pedestals</b>         |              |
| CSP .....                                     | 4-5          |
| MPS .....                                     | 6-7          |
| MPE .....                                     | 8-9          |
| SSP.....                                      | 10-11        |
| XLP .....                                     | 12-13        |
| <b>Exposed Single Meter Service Pedestals</b> |              |
| ECS .....                                     | 14-15        |
| ESS.....                                      | 16-17        |
| <b>Single Meter Enclosure</b>                 |              |
| SB24SS/240V .....                             | 18-19        |
| <b>Dual Meter Service Pedestals</b>           |              |
| DSP .....                                     | 20-21        |
| <b>Non-Metered Power Pedestal</b>             |              |
| PWP.....                                      | 22-23        |
| <b>Low-Profile Switchgear</b>                 |              |
| SES.....                                      | 24-25        |
| <b>Service Pedestals Accessories.....</b>     | <b>26</b>    |
| <b>Custom Quoting and Submittal .....</b>     | <b>27</b>    |
| <b>Service Pedestal FAQ .....</b>             | <b>28</b>    |
| <b>Control Enclosures .....</b>               | <b>29-40</b> |
| <b>Front Entry Enclosures</b>                 |              |
| SB-18SS .....                                 | 30           |
| SB-1852SS .....                               | 31           |
| SB-24SS .....                                 | 32           |
| SB-36SS .....                                 | 33           |
| <b>Dual Entry Enclosures</b>                  |              |
| SB-18DSS.....                                 | 34           |
| SB-24DSS.....                                 | 35           |
| <b>Wall Mount Enclosures</b>                  |              |
| SB-18SSW .....                                | 36           |
| SB-24SSW .....                                | 37           |
| SB-36SSW .....                                | 38           |
| SB-16SSW .....                                | 39           |
| LD-18SW .....                                 | 40           |
| <b>Control Enclosure Accessories .....</b>    | <b>41</b>    |
| <b>Control Enclosure FAQ .....</b>            | <b>42</b>    |
| <b>Terms and Conditions .....</b>             | <b>43</b>    |

All StrongBox products are built from 100% stainless steel, delivering exceptional durability and long-term protection.

Stainless steel stands up to everyday wear and tear while providing the strength and reliability needed to withstand harsh and unpredictable environments.

Explore the chart below to see how StrongBox stainless steel enclosures compare to other commonly used materials.



|                          | VANDAL RESISTANCE                                        | CORROSION RESISTANCE                                        | HEAT DISSIPATION                                      | STRENGTH                                                | AESTHETICS                                    |
|--------------------------|----------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------|
| <b>TOP CHOICE</b>        | ✓                                                        | ✓                                                           | ✓                                                     | ✓                                                       | ✓                                             |
| <b>STAINLESS STEEL</b>   | Scratch resistant<br>Graffiti easily removed             | Highly corrosion resistant, even in salt water environments | High reflective value minimizes heat from UV rays     | Exceptional Strength                                    | Blends into environment<br>Finish never fades |
| <b>CARBON STEEL</b>      | ✗<br>Easily scratched<br>Graffiti requires repaint       | ⊖<br>Requires protective coating and continuous maintenance | ⊖<br>Poor reflective value unless painted light color | ⊖<br>Moderate strength and impact resistance            | ✗<br>Finish can fade and rust over time       |
| <b>ANODIZED ALUMINUM</b> | ✗<br>Easily scratched<br>Graffiti removal damages finish | ✓<br>Corrosion Resistant<br>Environment dependent           | ✓<br>Excellent Heat Dissipation                       | ✓<br>Excellent strength-to-weight ratio                 | ⊖<br>Finish can fade without proper sealing   |
| <b>STANDARD ALUMINUM</b> | ✗<br>Easily scratched<br>Graffiti removal damages finish | ⊖<br>Pitting and corrosion is common without coating        | ✓<br>Excellent Heat Dissipation                       | ✗<br>Naturally soft and ductile<br>Can weaken over time | ✗<br>Pitting, corrosion and fading is common  |

# SERVICE PEDESTALS

*NEMA TYPE 3R and UL 508A LISTED*

## SINGLE SERVICE PEDESTALS



- 100% Stainless Steel
- 100-200 amp service
- EUSERC Compliant
- Cal-Trans Compliant\* (Select Models)
- All access points include padlock provisions
- Separate customer and utility section

## DUAL SERVICE PEDESTAL



- 100% Stainless Steel
- 100-200 amp service per meter
- EUSERC 308A Compliant
- Cal-Trans Compliant
- Allows for separate billing
- All access points include padlock provisions
- Separate customer and utility section

## NON-METERED PEDESTAL




- 100% Stainless Steel
- 100-200 amp service
- Ideal for remote locations where electricity is metered upstream
- Three-point latch includes padlock provisions

## LOW-PROFILE SWITCHGEAR



- 100% Stainless Steel
- 300-400 amp service
- EUSERC Compliant
- Ideal for applications that require higher voltage
- All access points include padlock provisions
- Separate customer and utility section

## QUICKPAD™



- Easily and securely mount your StrongBox enclosure with no concrete required
- Highly durable
- Corrosion resistant
- Vandal resistant

## ACCESSORIES



Components can be installed or sold separately.

- Mounting Base
- Riser Pedestals
- Photocells
- Branch Breakers
- Time Clock
- Surge Protectors
- Contact Blocks

## CSP

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 16"   | 48"    | 16"   |
| Customer Section | 9"    | 14"    | 8"    |

### Features and Benefits

- 100% Stainless Steel construction
- Compact 16" footprint
- Separate compartments with swing side top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available
- Cold sequence disconnect available


### Compliance

- EUSERC 308\*
- Caltrans Type III-BF & ES-2E
- NEMA TYPE 3R Rated
- UL 508A Listed



### CSP Model Configurations: Choose one Blue number per section to create your part number (example CSP-11008-10)

| Model No. - Phase  | Main Amps | Breaker Pos  | AIC Rating  | Extra Options            |
|--------------------|-----------|--------------|-------------|--------------------------|
| <b>CSP</b>         |           |              |             |                          |
| 1 - 1ph (120/240V) | 06 - 60A  | XX - No Dist | 10 - 10,000 | L - Lever Bypass         |
| 5 - 1ph (120/208V) | 10 - 100A | 08 - 8 Pos   | 22 - 22,000 | U - Un-Metered           |
|                    | 12 - 125A | 16 - 16 Pos  | 65 - 65,000 | S - Switched Load Center |
|                    | 15 - 150A |              | T - T-Fuse  |                          |
|                    | 17 - 175A |              |             |                          |
|                    | 20 - 200A |              |             |                          |

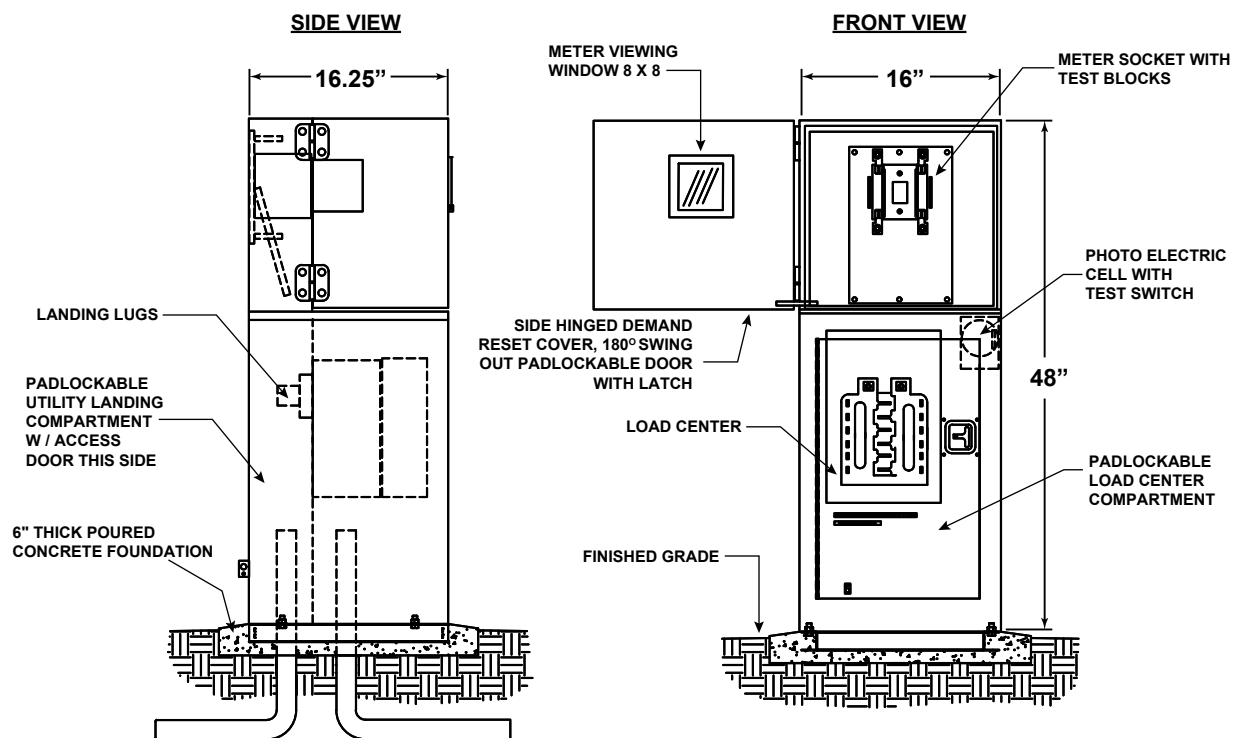

**Accessories for CSP** (for complete accessories, see page 26)



**CSP-B BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 17 x 2 x 16 in



**QP-CSP**  
*QUICKPAD™*

Fast and secure mounting with no concrete required!

**Overall Dims:** 38 x 18 x 25 in

**Mounting Pad:** 29 x 19 in

**Conduit Cutout:** 13 x 16 in



**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors
- 18" Pedestal Riser

## MPS

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 18"   | 52"    | 20"   |
| Customer Section | 5"    | 24"    | 8"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with swing side top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available


### Compliance

- EUSERC 308\*
- NEMA TYPE 3R Rated
- UL 508A Listed



### MPS Model Configurations: Choose one Blue number per section to create your part number (example MPS-11016-22)

| Model No. - Phase                       | Main Amps        | Breaker Pos         | AIC Rating         | Extra Options                   |
|-----------------------------------------|------------------|---------------------|--------------------|---------------------------------|
| <b>MPS</b>                              |                  |                     |                    |                                 |
| <b>1</b> - 1ph (120/240V)               | <b>06</b> - 60A  | <b>XX</b> - No Dist | <b>10</b> - 10,000 | <b>L</b> - Lever Bypass         |
| <b>2</b> - 1ph (240/480V) <sup>XX</sup> | <b>10</b> - 100A | <b>16</b> - 16 Pos  | <b>22</b> - 22,000 | <b>U</b> - Un-Metered           |
| <b>3</b> - 3ph (208/120V)               | <b>12</b> - 125A | <b>18</b> - 18 Pos  | <b>35</b> - 35,000 | <b>S</b> - Switched Load Center |
| <b>4</b> - 3ph (240V)                   | <b>15</b> - 150A | <b>24</b> - 24 Pos  | <b>65</b> - 65,000 |                                 |
| <b>5</b> - 1ph (120/208V)               | <b>17</b> - 175A | <b>26</b> - 26 Pos  | <b>85</b> - 85,000 |                                 |
| <b>6</b> - 3ph (480/277V) <sup>XX</sup> | <b>20</b> - 200A |                     | <b>T</b> - T-Fuse  |                                 |
| <b>8</b> - 3ph (240/120V)               |                  |                     |                    |                                 |

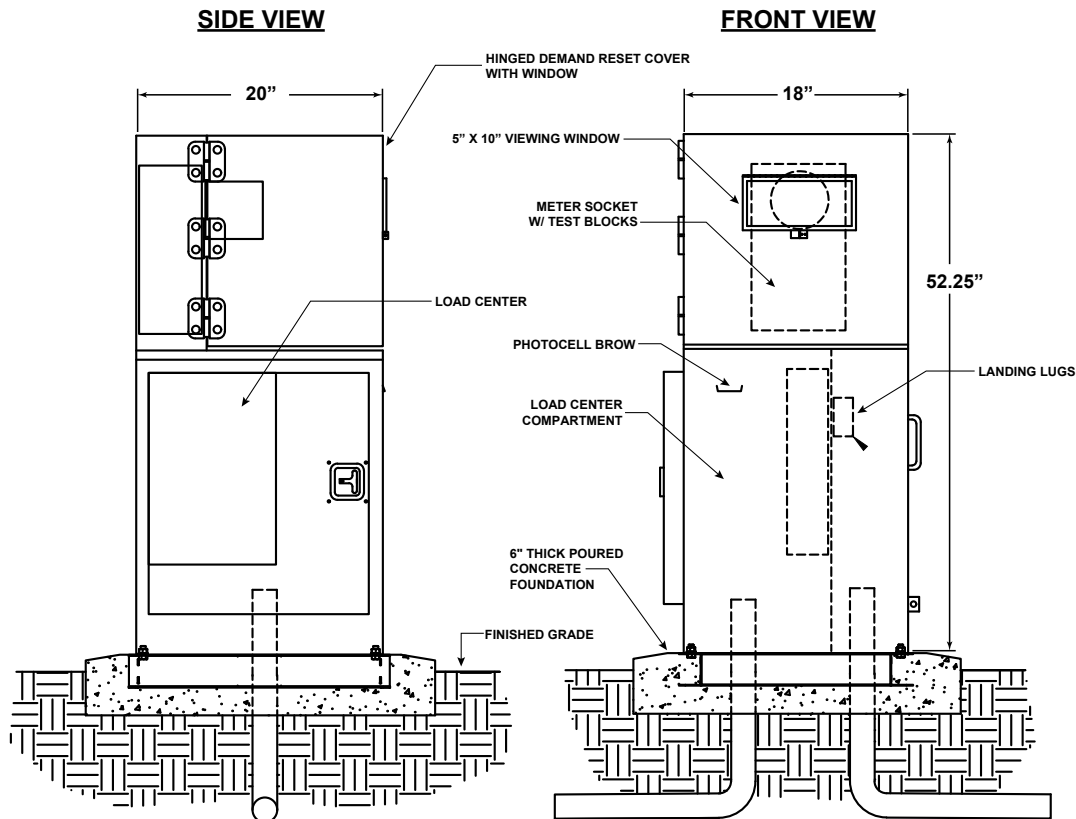

**Accessories for MPS** (for complete accessories, see page 26)



**MPS-BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 18 x 3 x 20 in



**QP-MPS**  
*QUICKPAD™*

Fast and secure mounting with no concrete required!

**Overall Dims:** 25 x 18 x 39 in

**Mounting Pad:** 25 x 32 in

**Conduit Cutout:** 13 x 16 in



**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## MPE

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 18"   | 52"    | 32"   |
| Customer Section | 5"    | 24"    | 8"    |
| Storage Section  | 18"   | 52"    | 12"   |

## Features and Benefits

- Upgrade any MPS Model to an MPE
- 100% Stainless Steel construction
- Maximum storage with attached SB-1852SS enclosure
  - Enclosure comes with removable backboard
- Separate compartments with swing side top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

## Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available


## Compliance

- EUSERC 308\*
- NEMA TYPE 3R Rated
- UL 508A Listed




## MPE Model Configurations: Choose one Blue number per section to create your part number (example MPE-11016-22)

| Model No. - Phase                       | Main Amps        | Breaker Pos         | AIC Rating         | Extra Options                   |
|-----------------------------------------|------------------|---------------------|--------------------|---------------------------------|
| <b>MPE</b>                              |                  |                     |                    |                                 |
| <b>1</b> - 1ph (120/240V)               | <b>06</b> - 60A  | <b>XX</b> - No Dist | <b>10</b> - 10,000 | <b>L</b> - Lever Bypass         |
| <b>2</b> - 1ph (240/480V) <sup>xx</sup> | <b>10</b> - 100A | <b>16</b> - 16 Pos  | <b>22</b> - 22,000 | <b>U</b> - Un-Metered           |
| <b>3</b> - 3ph (208/120V)               | <b>12</b> - 125A | <b>18</b> - 18 Pos  | <b>35</b> - 35,000 | <b>S</b> - Switched Load Center |
| <b>4</b> - 3ph (240V)                   | <b>15</b> - 150A | <b>24</b> - 24 Pos  | <b>65</b> - 65,000 |                                 |
| <b>5</b> - 1ph (120/208V)               | <b>17</b> - 175A | <b>26</b> - 26 Pos  | <b>85</b> - 85,000 |                                 |
| <b>6</b> - 3ph (480/277V) <sup>xx</sup> | <b>20</b> - 200A |                     | <b>T</b> - T-Fuse  |                                 |
| <b>8</b> - 3ph (240/120V)               |                  |                     |                    |                                 |

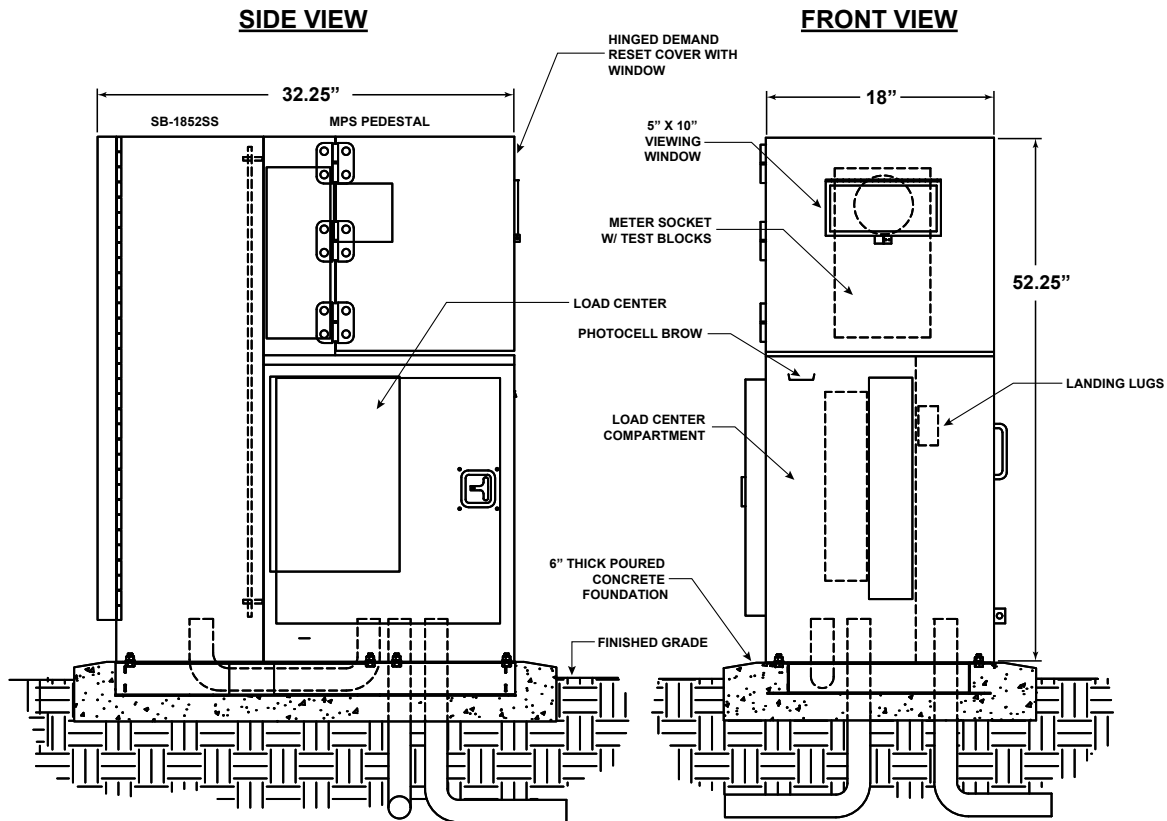

**Accessories for MPE** (for complete accessories, see page 26)

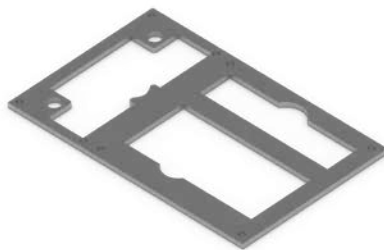

**MPE-BASE**  
MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 18 x 3 x 30 in



**QP-MPE**  
QUICKPAD™

Fast and secure mounting with no concrete required!

**Overall Dims:** 25 x 18 x 39 in

**Mounting Pad:** 21 x 35 in

**Conduit Cutout:** Meter: 13 x 15 in  
Enclosure: 14 x 6 in



**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## SSP

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 26"   | 50"    | 17"   |
| Customer Section | 7"    | 28"    | 6"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with lift up top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available


### Compliance

- EUSERC 308\*
- Caltrans Type III-BF
- NEMA TYPE 3R Rated
- UL 508A Listed



### SSP Model Configurations: Choose one Blue number per section to create your part number (example SSP-11016-10)

| Model No. - Phase         | Main Amps        | Breaker Pos        | AIC Rating           | Extra Options                   |
|---------------------------|------------------|--------------------|----------------------|---------------------------------|
| <b>SSP</b>                |                  |                    |                      |                                 |
| <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>16</b> - 16 Pos | <b>10</b> - 10,000   | <b>L</b> - Lever Bypass         |
| <b>2</b> - 1ph (240/480V) | <b>10</b> - 100A | <b>18</b> - 18 Pos | <b>14</b> - 14,000   | <b>U</b> - Un-Metered           |
| <b>3</b> - 3ph (208/120V) | <b>12</b> - 125A | <b>24</b> - 24 Pos | <b>22</b> - 22,000   | <b>S</b> - Switched Load Center |
| <b>4</b> - 3ph (240V)     | <b>15</b> - 150A | <b>26</b> - 26 Pos | <b>35</b> - 35,000   | <b>P</b> - Bolt on Breakers     |
| <b>5</b> - 1ph (120/208V) | <b>17</b> - 175A | <b>30</b> - 30 Pos | <b>65</b> - 65,000   | <b>F</b> - Subfeed Breaker      |
| <b>6</b> - 3ph (480/277V) | <b>20</b> - 200A |                    | <b>85</b> - 85,000   |                                 |
| <b>7</b> - 1ph (277/480V) |                  |                    | <b>100</b> - 100,000 |                                 |
| <b>8</b> - 3ph (240/120V) |                  |                    | <b>T</b> - T-Fuse    |                                 |

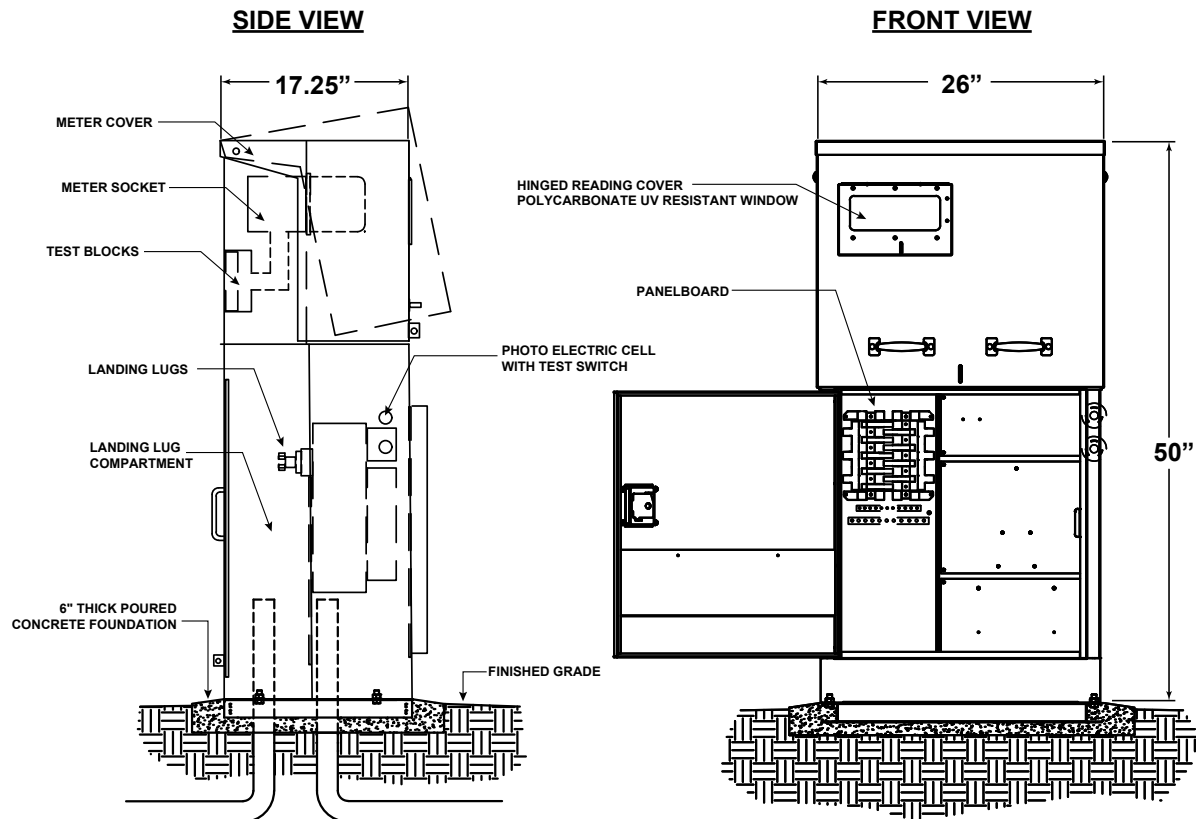

**Accessories for SSP** (for complete accessories, see page 26)



**CSP-C BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 24 x 2 x 17 in

**SSP-PED**  
*PEDESTAL RISER*

Brings controls up to a more ergonomic level and prevents flooding damage.

**Overall Dims:** 25 x 6 x 17 in

**Conduit Cutout:** 23 x 5 in

**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## XLP

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 32"   | 60"    | 20"   |
| Customer Section | 12"   | 39"    | 7"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with swing side top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available


### Compliance

- EUSERC 308\*
- Caltrans Type III-BF
- NEMA TYPE 3R Rated
- UL 508A Listed




### XLP Model Configurations: Choose one Blue number per section to create your part number (example XLP-11016-10)

| Model No. - Phase         | Main Amps        | Breaker Pos        | AIC Rating           | Extra Options                   |
|---------------------------|------------------|--------------------|----------------------|---------------------------------|
| <b>XLP</b>                |                  |                    |                      |                                 |
| <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>16</b> - 16 Pos | <b>10</b> - 10,000   | <b>L</b> - Lever Bypass         |
| <b>2</b> - 1ph (240/480V) | <b>10</b> - 100A | <b>18</b> - 18 Pos | <b>14</b> - 14,000   | <b>U</b> - Un-Metered           |
| <b>3</b> - 3ph (208/120V) | <b>12</b> - 125A | <b>24</b> - 24 Pos | <b>22</b> - 22,000   | <b>S</b> - Switched Load Center |
| <b>4</b> - 3ph (240V)     | <b>15</b> - 150A | <b>26</b> - 26 Pos | <b>35</b> - 35,000   | <b>P</b> - Bolt on Breakers     |
| <b>5</b> - 1ph (120/208V) | <b>17</b> - 175A | <b>30</b> - 30 Pos | <b>65</b> - 65,000   | <b>F</b> - Subfeed Breaker      |
| <b>6</b> - 3ph (480/277V) | <b>20</b> - 200A | <b>42</b> - 42 Pos | <b>85</b> - 85,000   |                                 |
| <b>7</b> - 1ph (277/480V) |                  |                    | <b>100</b> - 100,000 |                                 |
| <b>8</b> - 3ph (240/120V) |                  |                    | <b>T</b> - T-Fuse    |                                 |

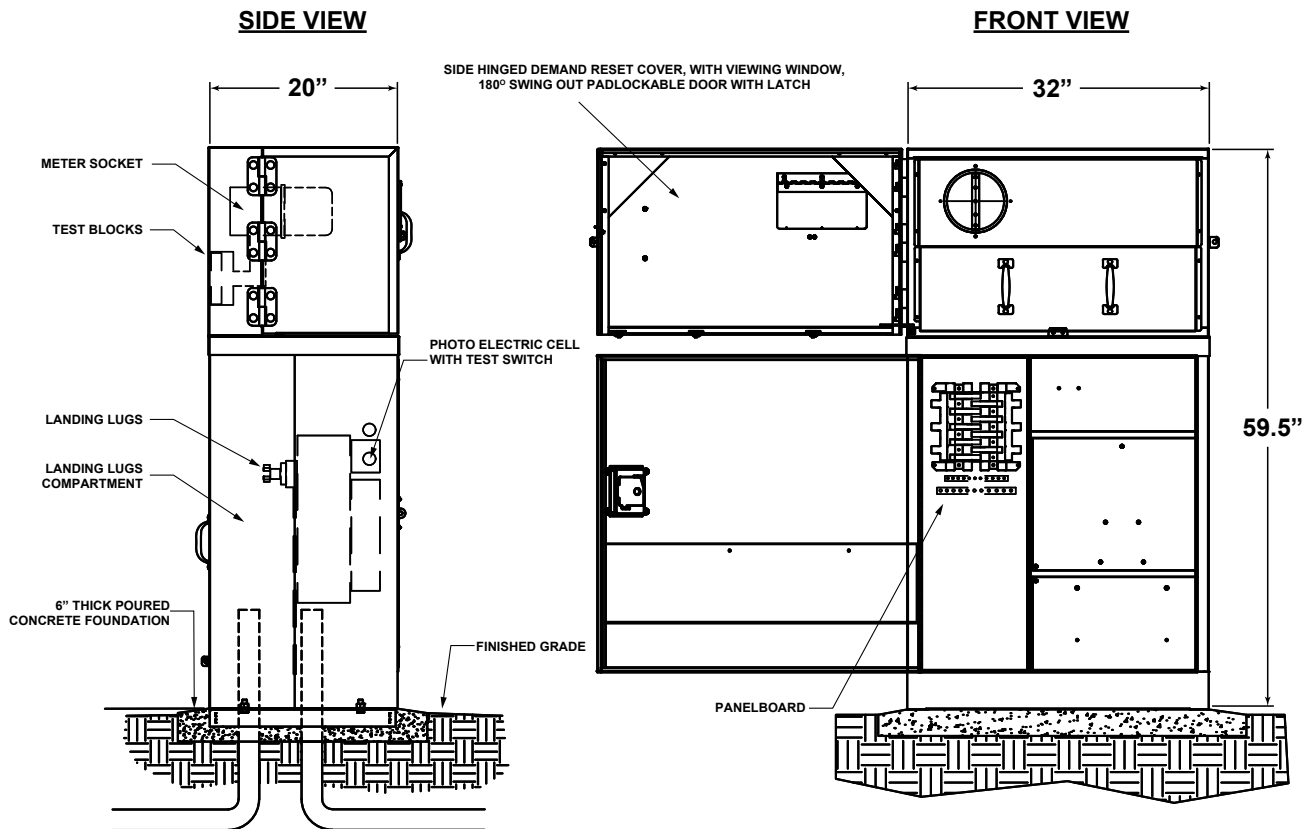

**Accessories for XLP** (for complete accessories, see page 26)

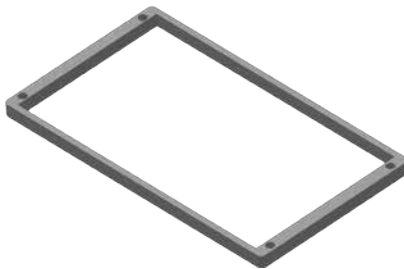

**XLP BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 32 x 2 x 18 in

**ADDITIONAL**  
*ACCESSORIES*

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## ECS

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 16"   | 48"    | 18"   |
| Customer Section | 9"    | 14"    | 8"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments lift off front panel
- Utility section houses landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- *Standard is Ringless Meter with Bypass Lever*
- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw


### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed




### ECS Model Configurations: Choose one Blue number per section to create your part number (example ECS-11008-10L)

| Model No. - Phase         | Main Amps        | Breaker Pos         | AIC Rating         | Extra Options                   |
|---------------------------|------------------|---------------------|--------------------|---------------------------------|
| <b>ECS</b>                |                  |                     |                    |                                 |
| <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>XX</b> - No Dist | <b>10</b> - 10,000 | <b>L</b> - Lever Bypass         |
| <b>5</b> - 1ph (120/208V) | <b>10</b> - 100A | <b>08</b> - 8 Pos   | <b>22</b> - 22,000 | <b>U</b> - Un-Metered           |
|                           | <b>12</b> - 125A | <b>16</b> - 16 Pos  | <b>65</b> - 65,000 | <b>S</b> - Switched Load Center |
|                           | <b>15</b> - 150A |                     | <b>T</b> - T-Fuse  |                                 |
|                           | <b>17</b> - 175A |                     |                    |                                 |
|                           | <b>20</b> - 200A |                     |                    |                                 |

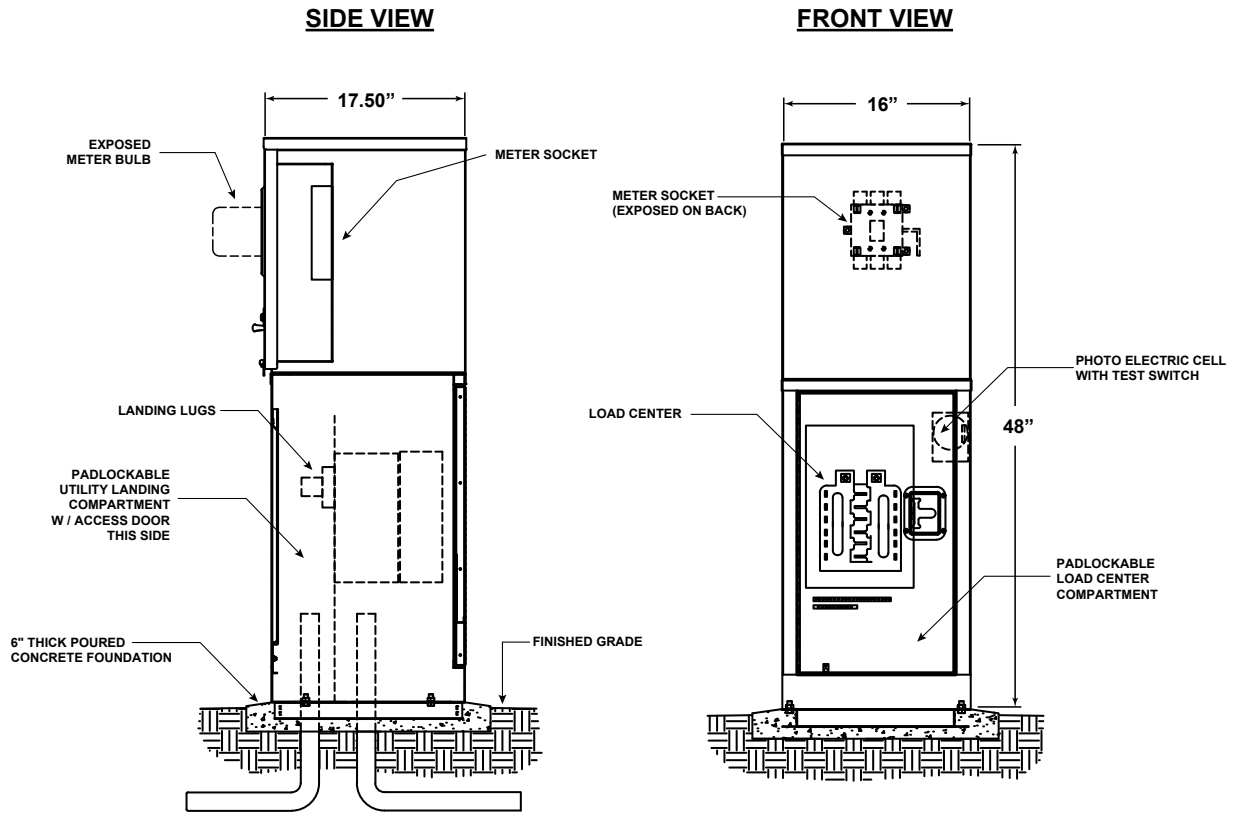

**Accessories for ECS** (for complete accessories, see page 26)

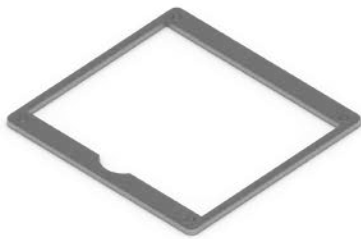

**CSP-B BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 17 x 2 x 16 in



**QP-CSP**  
*QUICKPAD™*

Fast and secure mounting with no concrete required!

**Overall Dims:** 38 x 18 x 25 in

**Mounting Pad:** 29 x 19 in

**Conduit Cutout:** 13 x 16 in



**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors
- 18" Pedestal Riser

## ESS

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 26"   | 50"    | 17"   |
| Customer Section | 7"    | 28"    | 6"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with lift off front panel
- Utility section houses landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- *Standard is Ringless Meter with Bypass Lever*
- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw


### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



### ESS Model Configurations: Choose one Blue number per section to create your part number (example ECS-11016-22L)

| Model No. - Phase         | Main Amps        | Breaker Pos        | AIC Rating           | Extra Options                   |
|---------------------------|------------------|--------------------|----------------------|---------------------------------|
| <b>ESS</b>                |                  |                    |                      |                                 |
| <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>16</b> - 16 Pos | <b>10</b> - 10,000   | <b>L</b> - Lever Bypass         |
| <b>2</b> - 1ph (240/480V) | <b>10</b> - 100A | <b>18</b> - 18 Pos | <b>14</b> - 14,000   | <b>U</b> - Un-Metered           |
| <b>3</b> - 3ph (208/120V) | <b>12</b> - 125A | <b>24</b> - 24 Pos | <b>22</b> - 22,000   | <b>S</b> - Switched Load Center |
| <b>4</b> - 3ph (240V)     | <b>15</b> - 150A | <b>26</b> - 26 Pos | <b>35</b> - 35,000   | <b>P</b> - Bolt on Breakers     |
| <b>5</b> - 1ph (120/208V) | <b>17</b> - 175A | <b>30</b> - 30 Pos | <b>65</b> - 65,000   | <b>F</b> - Subfeed Breaker      |
| <b>6</b> - 3ph (480/277V) | <b>20</b> - 200A |                    | <b>85</b> - 85,000   |                                 |
| <b>7</b> - 1ph (277/480V) |                  |                    | <b>100</b> - 100,000 |                                 |
| <b>8</b> - 3ph (240/120V) |                  |                    | <b>T</b> - T-Fuse    |                                 |

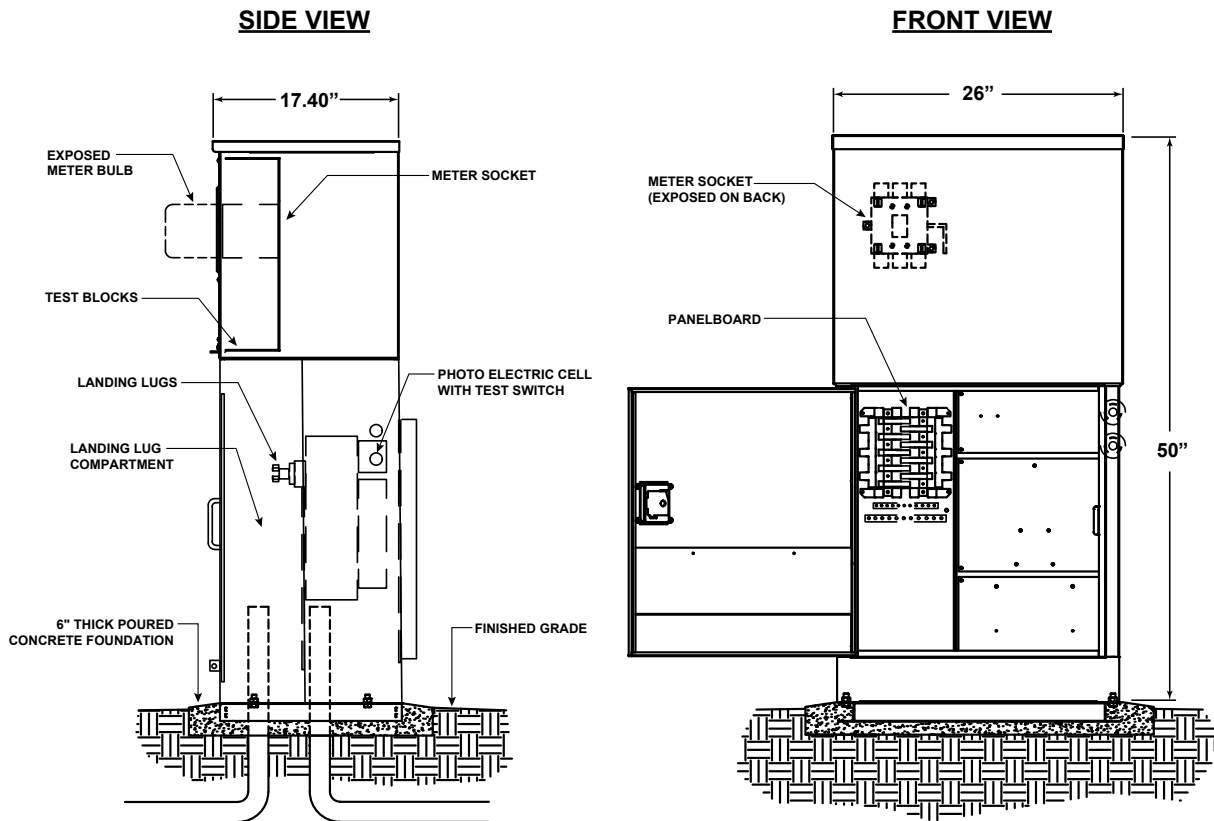

**Accessories for ESS** (for complete accessories, see page 26)



**CSP-C BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 24 x 2 x 17 in

**SSP-PED**  
*PEDESTAL RISER*

Brings controls up to a more ergonomic level and prevents flooding damage.

**Overall Dims:** 25 x 6 x 17 in

**Conduit Cutout:** 23 x 15 in

**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## SB-24SS/240V

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 24"   | 48"    | 29"   |
| Meter Section    | 24"   | 32"    | 15"   |
| Customer Section | 24"   | 48"    | 8"    |
| Storage Section  | 24"   | 16"    | 9"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with double door design
- Removable, pre-drilled backboard
- Large hinged viewing window
- Filtered side louvers
- Three point locking system with padlock provisions
- Anchor bolts and mounting template included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw


### Compliance

- EUSERC 309
- NEMA TYPE 3R Rated
- UL 508A Listed



## SB-24SS/240V Model Configurations

| Model No.           | Phase                     | Main Amps        | Breaker Positions       |
|---------------------|---------------------------|------------------|-------------------------|
| <b>SB-24SS/240V</b> | <b>1</b> - 1ph (120/240V) | <b>10</b> - 100A | <b>08</b> - 8 Positions |

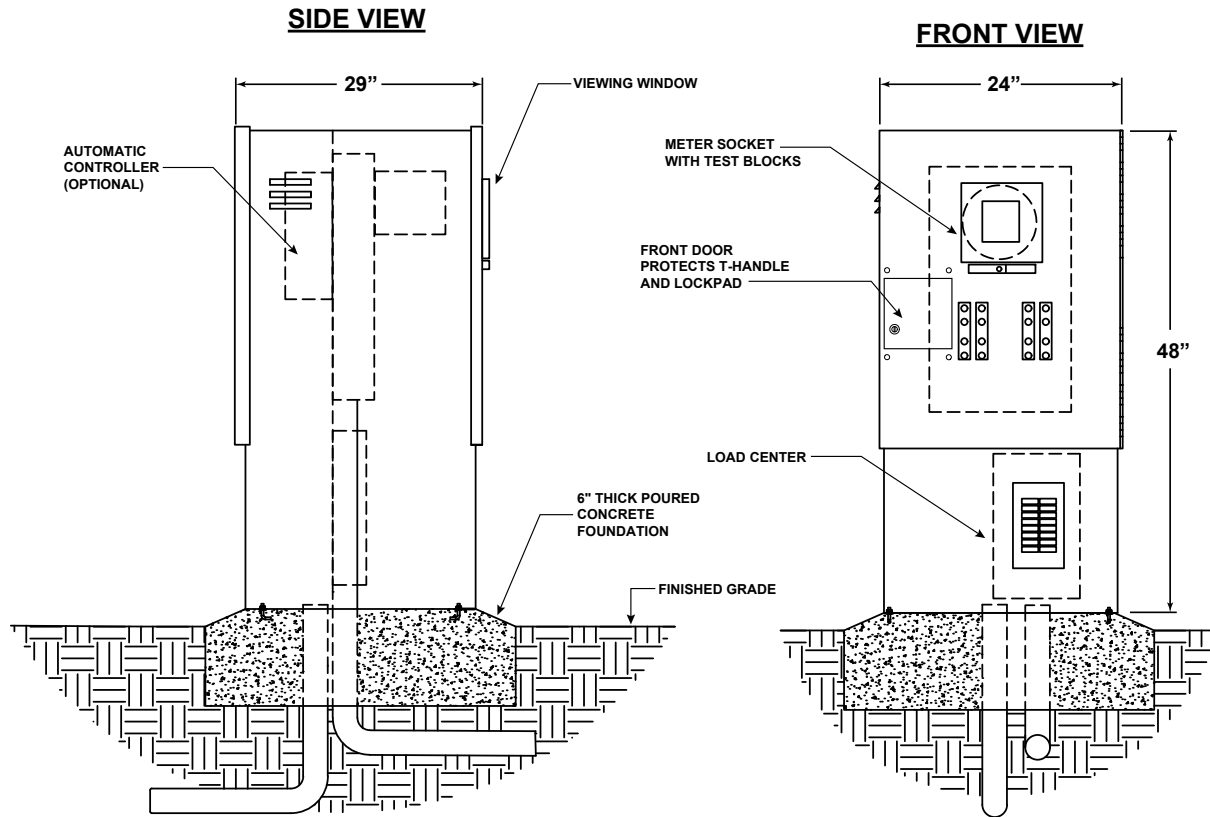

**Accessories for SB-24SS/240V** (for complete accessories, see page 26)



**PED-24SS-240V**  
**PEDESTAL RISER**

Brings controls up to a more ergonomic level and prevents flooding damage.

**Overall Dims:** 25 x 12 x 24 in

**Conduit Cutout:** 22 x 21 in

**QP-M**  
**QUICKPAD™**

Fast and secure mounting with no concrete required!

**Overall Dims:** 31 x 16 x 31 in

**Mounting Pad:** 29 x 29 in

**Conduit Cutout:** 15 x 11 in

**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## DSP

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 26"   | 50"    | 17"   |
| Customer Section | 7"    | 28"    | 6"    |

### Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with lift up top section
- Utility section houses landing lugs
- Hinged viewing windows for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available
- Allows for separate metered billing


### Compliance

- EUSERC 308A\*
- Caltrans Type III-CF
- NEMA TYPE 3R Rated
- UL 508A Listed



### DSP Model Configurations: Choose one Blue number per section to create your part number (example DSP-11008-10)

| Model No. - Phase         | Main Amps        | Breaker Pos       | AIC Rating         | Extra Options           |
|---------------------------|------------------|-------------------|--------------------|-------------------------|
| <b>DSP</b>                |                  |                   |                    |                         |
| <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>08</b> - 8 Pos | <b>10</b> - 10,000 | <b>L</b> - Lever Bypass |
| <b>5</b> - 1ph (120/208V) | <b>10</b> - 100A |                   | <b>22</b> - 22,000 |                         |
|                           | <b>12</b> - 125A |                   | <b>65</b> - 65,000 |                         |
|                           | <b>15</b> - 150A |                   | <b>T</b> - T-Fuse  |                         |
|                           | <b>17</b> - 175A |                   |                    |                         |
|                           | <b>20</b> - 200A |                   |                    |                         |

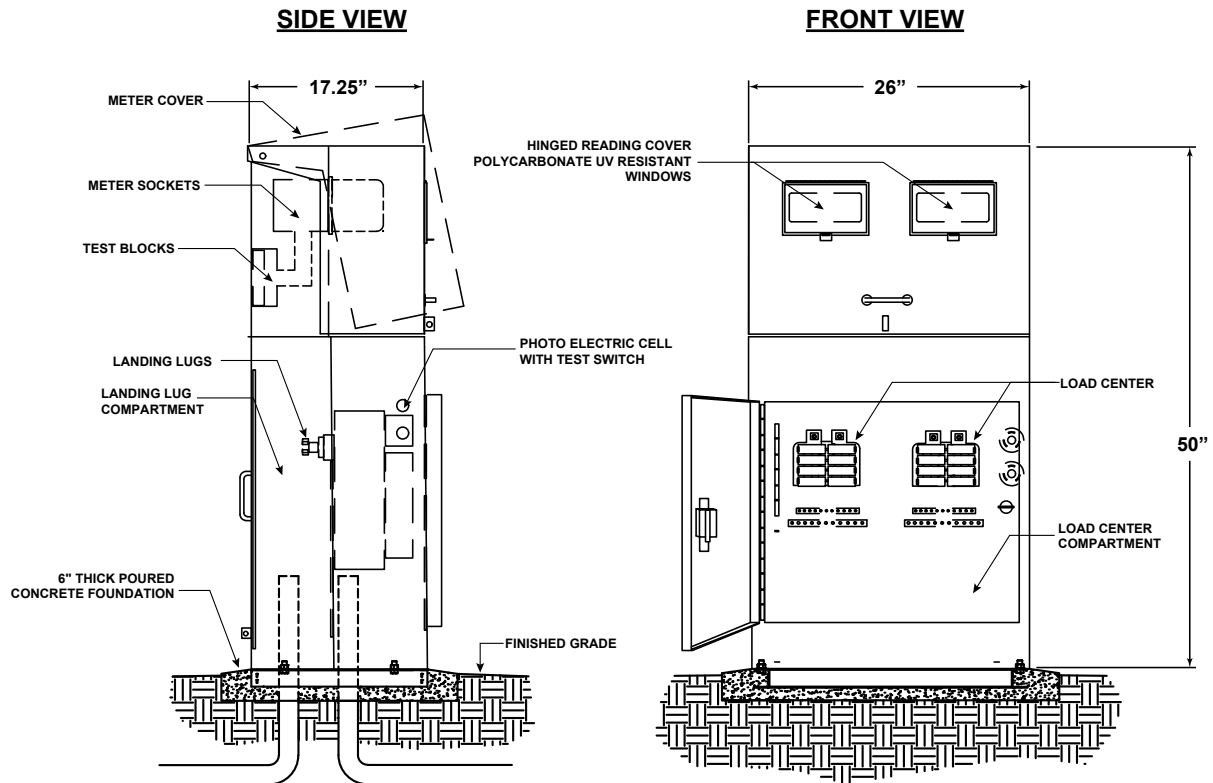

**Accessories for DSP** (for complete accessories, see page 26)



**CSP-C BASE**  
MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 24 x 2 x 17 in

**SSP-PED**  
PEDESTAL RISER

Brings controls up to a more ergonomic level and prevents flooding damage.

**Overall Dims:** 25 x 6 x 17 in

**Conduit Cutout:** 23 x 15 in

**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

## PWP

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 17"   | 31"    | 17"   |
| Customer Section | 15"   | 11"    | 7"    |

## Features and Benefits

- For applications where electricity is metered upstream
- 100% Stainless Steel construction
- Utility section houses landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty


## Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



## PWP Model Configurations: Choose one Blue number per section to create your part number (example PWP-11016-10)

| Model No. - Phase                    | Main Amps        | Breaker Pos         | AIC Rating         | Extra Options                   |
|--------------------------------------|------------------|---------------------|--------------------|---------------------------------|
| <b>PWP</b> <b>1</b> - 1ph (120/240V) | <b>06</b> - 60A  | <b>XX</b> - No Dist | <b>10</b> - 10,000 | <b>L</b> - Lever Bypass         |
|                                      | <b>10</b> - 100A | <b>08</b> - 8 Pos   | <b>22</b> - 22,000 | <b>U</b> - Un-Metered           |
|                                      | <b>12</b> - 125A | <b>16</b> - 16 Pos  | <b>65</b> - 65,000 | <b>S</b> - Switched Load Center |
|                                      | <b>15</b> - 150A |                     | <b>T</b> - T-Fuse  |                                 |
|                                      | <b>17</b> - 175A |                     |                    |                                 |
|                                      | <b>20</b> - 200A |                     |                    |                                 |

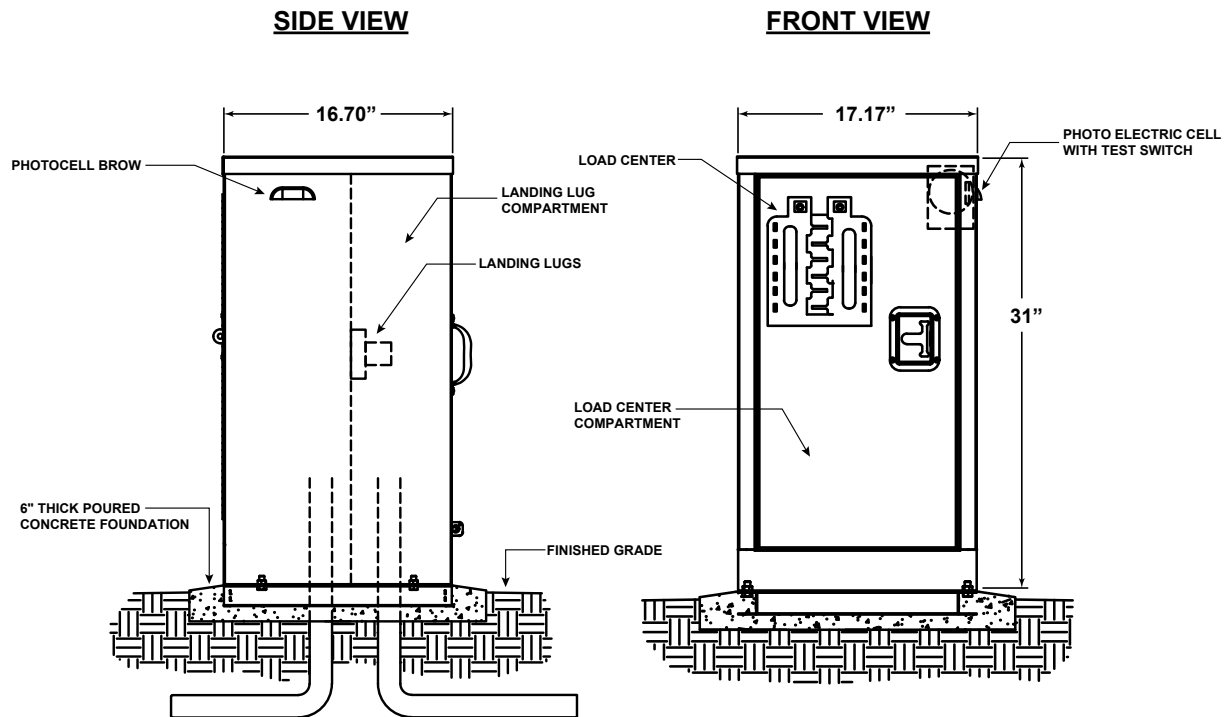

**Accessories for PWP** (for complete accessories, see page 26)



**CSP-B BASE**  
*MOUNTING BASE*

The go-to solution for mounting pedestals in new or existing concrete.

**Overall Dims:** 17 x 2 x 16 in



**QP-CSP**  
*QUICKPAD™*

Fast and secure mounting with no concrete required!

**Overall Dims:** 38 x 18 x 25 in

**Mounting Pad:** 29 x 19 in

**Conduit Cutout:** 13 x 16 in



**ADDITIONAL  
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors
- 18" Pedestal Riser

## SES

| Dimensions       | Width | Height | Depth |
|------------------|-------|--------|-------|
| Overall          | 37"   | 61"    | 32"   |
| Customer Section | 34"   | 59"    | 6"    |

### Features and Benefits

- 100% Stainless Steel construction
- Double door design
- Utility section houses current transformer and landing lugs
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

### Meter Section

- Meter Socket:
  - 4 Jaw, 5 Jaw, and 7 Jaw
- Meter Socket includes integrated test switch

### Compliance


- EUSERC 314, 329A, 329B, 332, 354
- NEMA TYPE 3R Rated
- UL 508A Listed




### SES Model Configurations: Choose one Blue number per section to create your part number (example SES-14030-85)

| Model No. - Phase         | Main Amps        | Breaker Pos - AIC Rating | Extra Options        |
|---------------------------|------------------|--------------------------|----------------------|
| <b>SES</b>                |                  |                          |                      |
| <b>1</b> - 1ph (120/240V) | <b>22</b> - 225A | <b>30</b> - 30 Pos       | <b>35</b> - 35,000   |
| <b>2</b> - 1ph (240/480V) | <b>25</b> - 250A | <b>42</b> - 42 Pos       | <b>65</b> - 65,000   |
| <b>3</b> - 3ph (208/120V) | <b>30</b> - 300A | <b>54</b> - 54 Pos       | <b>85</b> - 85,000   |
| <b>4</b> - 3ph (240V)     | <b>35</b> - 350A |                          | <b>100</b> - 100,000 |
| <b>5</b> - 1ph (120/208V) | <b>40</b> - 400A |                          |                      |
| <b>6</b> - 3ph (480/277V) |                  |                          |                      |
| <b>7</b> - 1ph (277/480V) |                  |                          |                      |
| <b>8</b> - 3ph (240/120V) |                  |                          |                      |


**BACK VIEW**

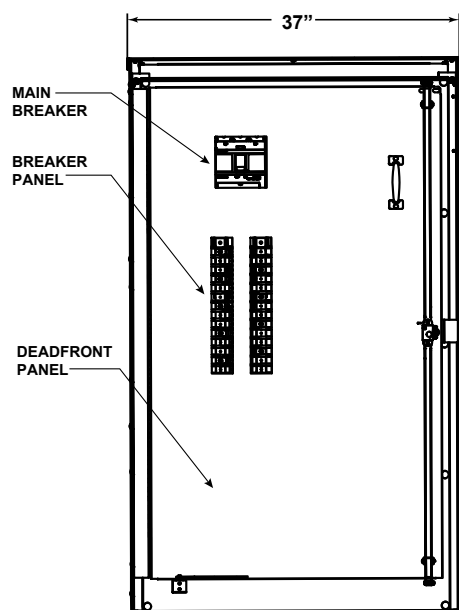


**FRONT VIEW**

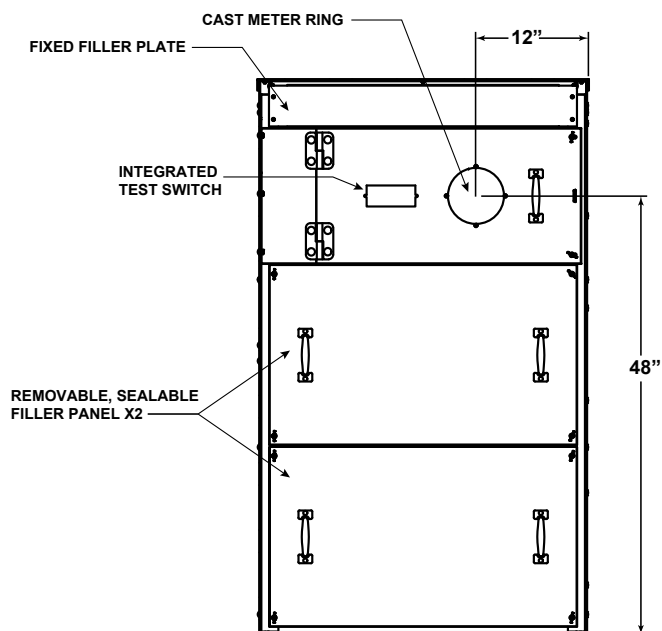

**SIDE VIEW**

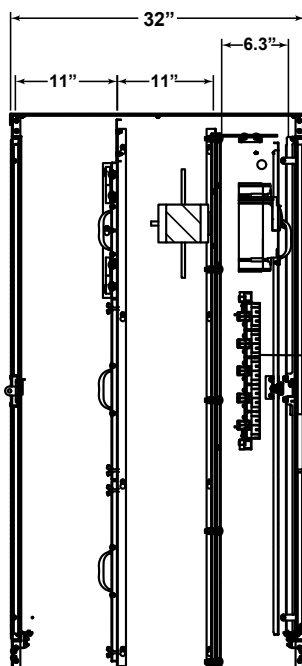

**LANDING LUG / CT COMPARTMENT**

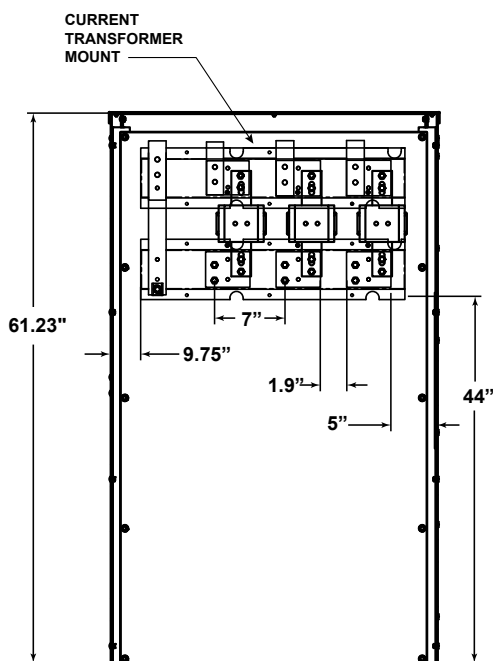

Complete accessories for SES on page 26

### QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



| Part Number   | Description              |
|---------------|--------------------------|
| <b>QP-MPS</b> | Used for MPS             |
| <b>QP-MPE</b> | Used for MPE             |
| <b>QP-CSP</b> | Used for CSP   ECS   PWP |
| <b>QP-M</b>   | Used For SB24SS/240V     |

### PEDESTAL RISER


Bring controls up to a more ergonomic height and prevent flood damage in high risk areas.



| Part Number         | Description              |
|---------------------|--------------------------|
| <b>PED-CSP18</b>    | Used for CSP   ECS   PWP |
| <b>SSP-PED</b>      | Used for SSP   DSP       |
| <b>PED24SS-240V</b> | Used for SB24SS/240V     |

### MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.



| Part Number       | Description              |
|-------------------|--------------------------|
| <b>MPS BASE</b>   | Used for MPS             |
| <b>MPE BASE</b>   | Used for MPE             |
| <b>CSP-B BASE</b> | Used for CSP   ECS   PWP |
| <b>CSP-C BASE</b> | Used for SSP   DSP   ESS |
| <b>XLP BASE</b>   | Used for XLP             |

### MISC ACCESSORIES



#### BREAKERS, CONTACT BLOCKS, SURGE PROTECTORS

StrongBox offers a wide range of Siemens brand branch breakers, contact blocks and surge protectors.

#### TIME CLOCKS

Electronic time switch to program automatic events with to-the-minute accuracy

#### PHOTOCELLS

Dusk-to-dawn sensing module using natural light levels to control operations.

## CUSTOM QUOTES

StrongBox Service Pedestals can be configured to meet your project's electrical requirements. Custom quotes are typically delivered within 1-2 business days depending on project complexity.

To get a custom quote, submit a panel schedule or one-line diagram. If not available provide the information to the right.

## PROJECT SUBMITTAL

When receiving a custom meter quote from StrongBox, our in-house engineering team can also create a project submittal sheet with a hold for release purchase order.


Information required for custom quote:

- Voltage/Phase
- Max Amperage
- Distribution Size
- AIC Rating
- Additional breakers and accessories

StrongBox submittal packages include detailed project information such as:

- Wiring diagrams
- Product dimensions
- Component specifications
- General notes and construction details

## Sample Submittal Sheet

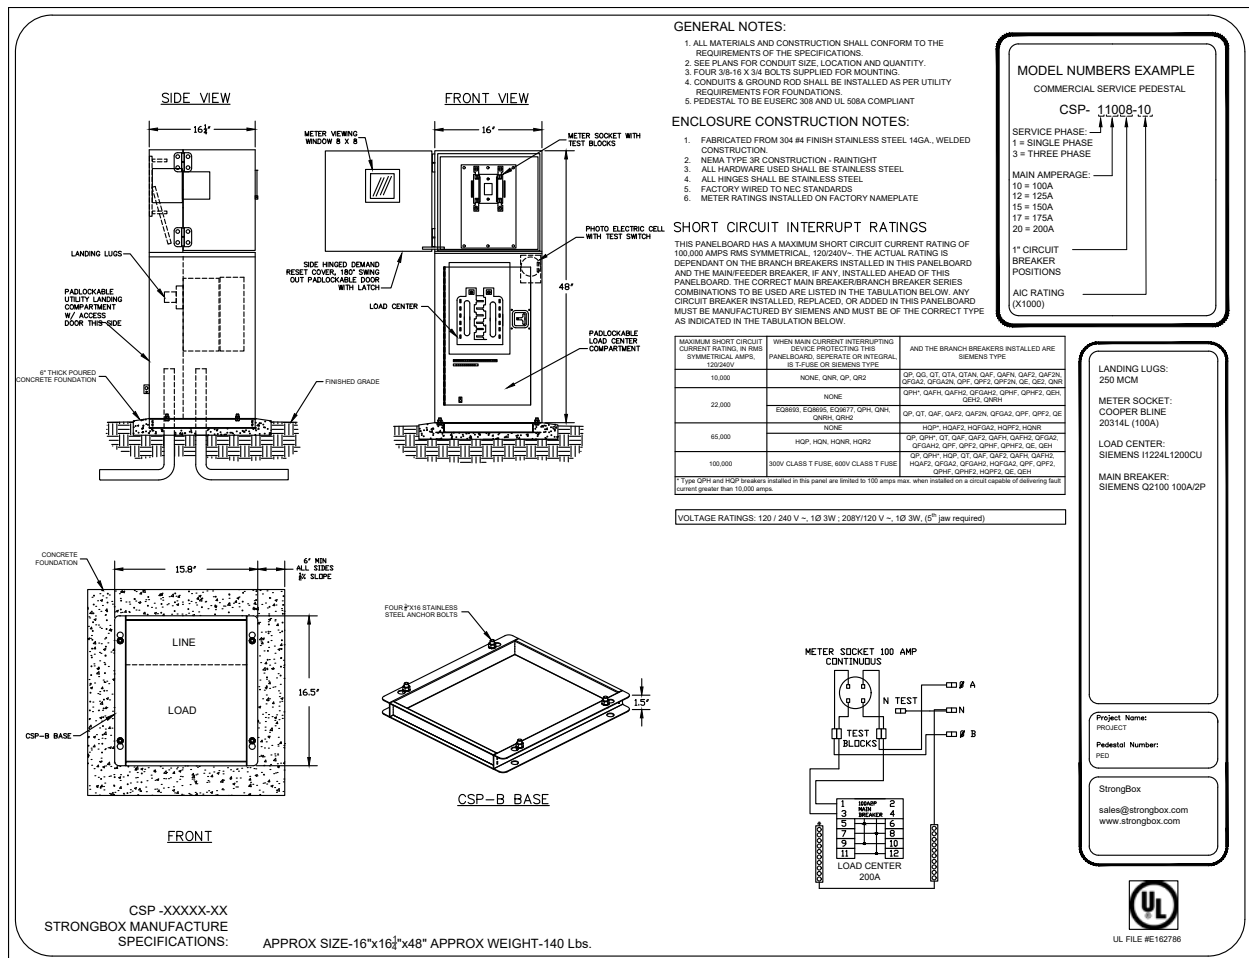

Ready to get started? Email your project specifications to [quotes@strongbox.com](mailto:quotes@strongbox.com)

### Service Pedestal FAQs

**1) Q: Are StrongBox meters approved for use in my city?**

**A:** StrongBox pedestals are EUSERC compliant and approved by many utilities across the U.S. If you're unsure, contact our sales team. We are happy to work with your local utility to gain approval if we are not already specified.

**2) Q: What kinds of electrical options do you offer?**

**A:** StrongBox offers a wide range of voltage, amperage and configuration options up to 400 amps. We also offer un-metered service pedestals if you'd like to use your own electrical components.

**3) Q: What brand of breakers do you use in your meters?**

**A:** StrongBox uses Siemens QP Series branch breakers for the majority of our meter products.

**4) Q: What materials are the pedestals made of?**

**A:** All StrongBox meter pedestals are made with 100% stainless steel for long term rust proof durability.

**5) Q: Do you offer painting or powder coating for meter pedestals?**

**A:** Yes, StrongBox offers durable powder coating in a wide range of RAL colors. To view all our available options visit our website at [www.strongbox.com/powder-coat-options](http://www.strongbox.com/powder-coat-options)

**6) Q: Are the pedestals pad-lockable?**

**A:** Yes, all access points include provisions for a pad-lock.

**7) Q: Can StrongBox pedestals be used to replace existing Caltrans Type III-BF installations?**

**A:** Yes, our CSP meter pedestal is compatible with Type III-BF specifications and should fit in any existing 16"x16" footprint.

**8) Q: Does StrongBox offer custom wiring?**

**A:** Yes, StrongBox service pedestals can be custom wired to meet your specifications. To receive a custom quote, submit plans to [quotes@strongbox.com](mailto:quotes@strongbox.com)

**9) Q: How are service pedestals installed?**

**A:** StrongBox pedestals can be installed with a mounting base into concrete or by using our QuickPad™ mounting system. The QuickPad™ mounting system includes a mounting pad and support base that is securely attached to the bottom of the pedestal and buried for a stable, vandal resistant installation with no concrete needed.

# CONTROL ENCLOSURES

*NEMA TYPE 3R and UL 508A LISTED*

## FRONT ENTRY



- 100% Stainless-Steel
- Filtered side louvers on top and bottom
- Pre-drilled removable backboard included
- Concealed three-point locking latch with padlock provisions
- Single and Dual entry options available

## WALL MOUNT



- 100% Stainless-Steel
- One and two door options available
- Pre-drilled removable backboard
- Wall mount brackets and conduit ready bottom plate included

## PEDESTAL RISERS



- 100% Stainless-Steel
- Brings enclosure up to a more ergonomic height
- Prevents water damage in high risk flood areas
- Concealed bolts for maximum security

## QUICKPAD™



- Easily and securely mount your StrongBox enclosure with no concrete required!
- Highly Durable
- Corrosion Resistant
- Vandal Resistant

## BACKBOARDS



- Stainless Steel, removable backboards are available for every StrongBox enclosure
- pre-drilled for various component installations

## SB-18SS

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 19"   | 36"    | 12"   |
| Usable Space | 16"   | 32"    | 9"    |
| Backboard    | 16"   | 32"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors included
- Pre-drilled removable backboard included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

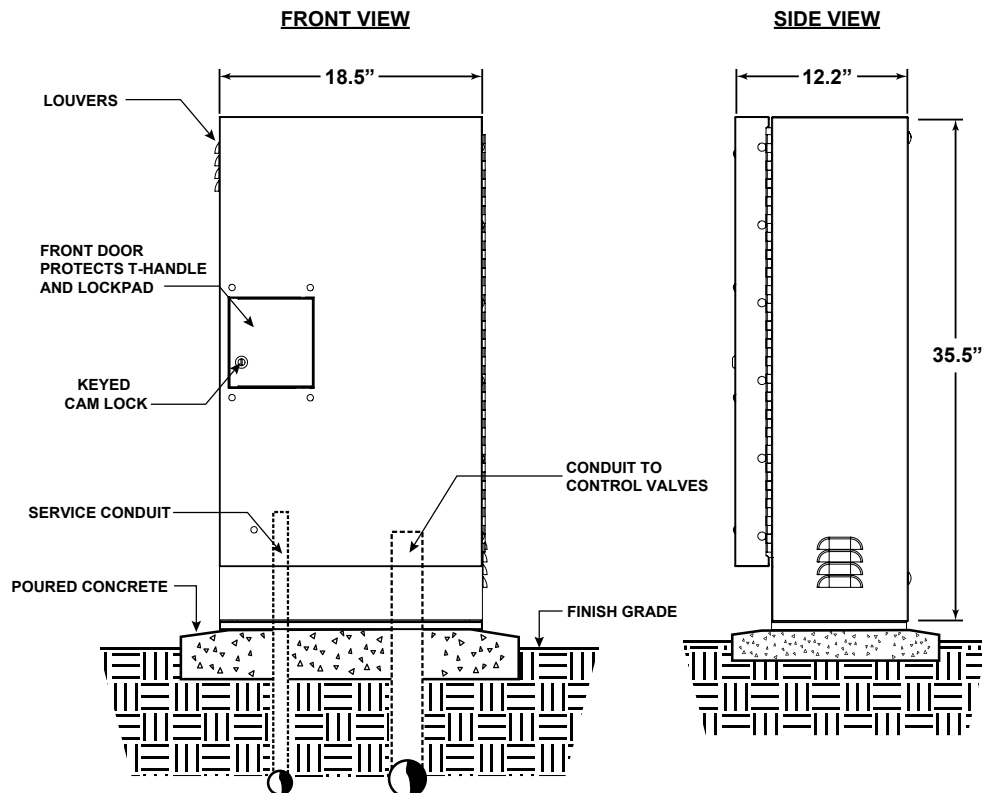

## SB-1852SS

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 18"   | 52"    | 12"   |
| Usable Space | 16"   | 45"    | 9"    |
| Backboard    | 16"   | 45"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors sold separate
- Pre-drilled removable backboard included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

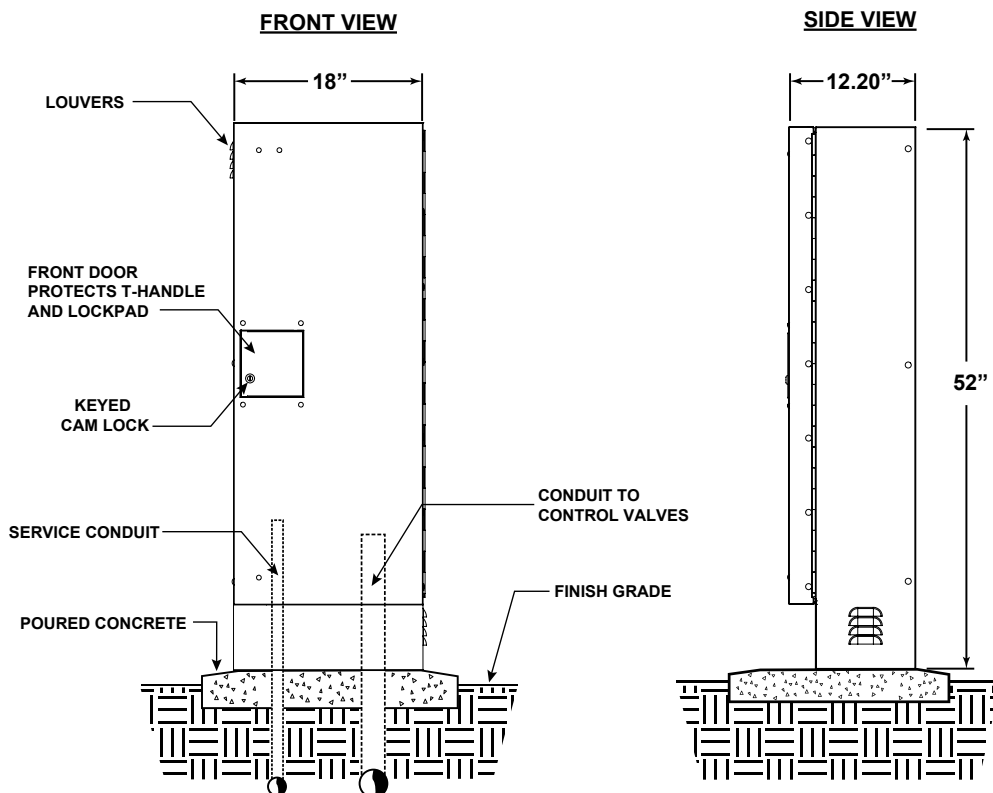

## SB-24SS

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 25"   | 36"    | 12"   |
| Usable Space | 22"   | 33"    | 8"    |
| Backboard    | 22"   | 33"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors included
- Pre-drilled removable backboard included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

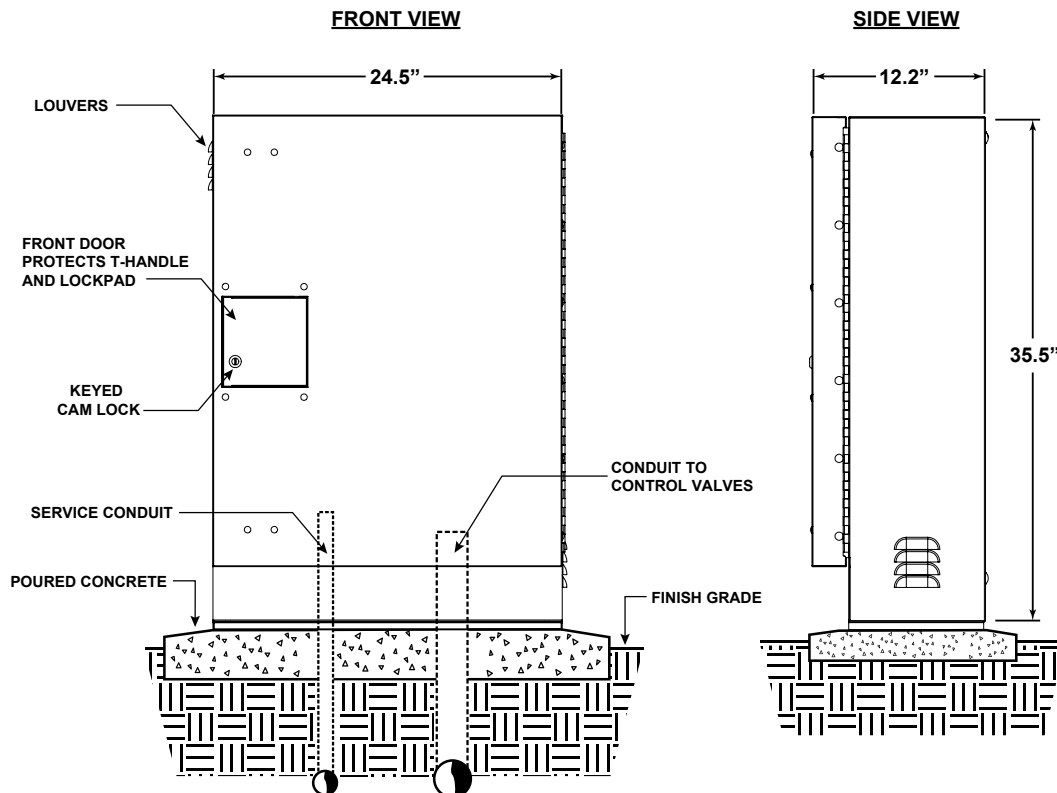

## SB-36SS

| Dimensions   | Width    | Height | Depth |
|--------------|----------|--------|-------|
| Overall      | 37"      | 36"    | 12"   |
| Usable Space | 16" (x2) | 32"    | 9"    |
| Backboards   | 16"      | 32"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking doors
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors included
- Two pre-drilled removable backboards included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

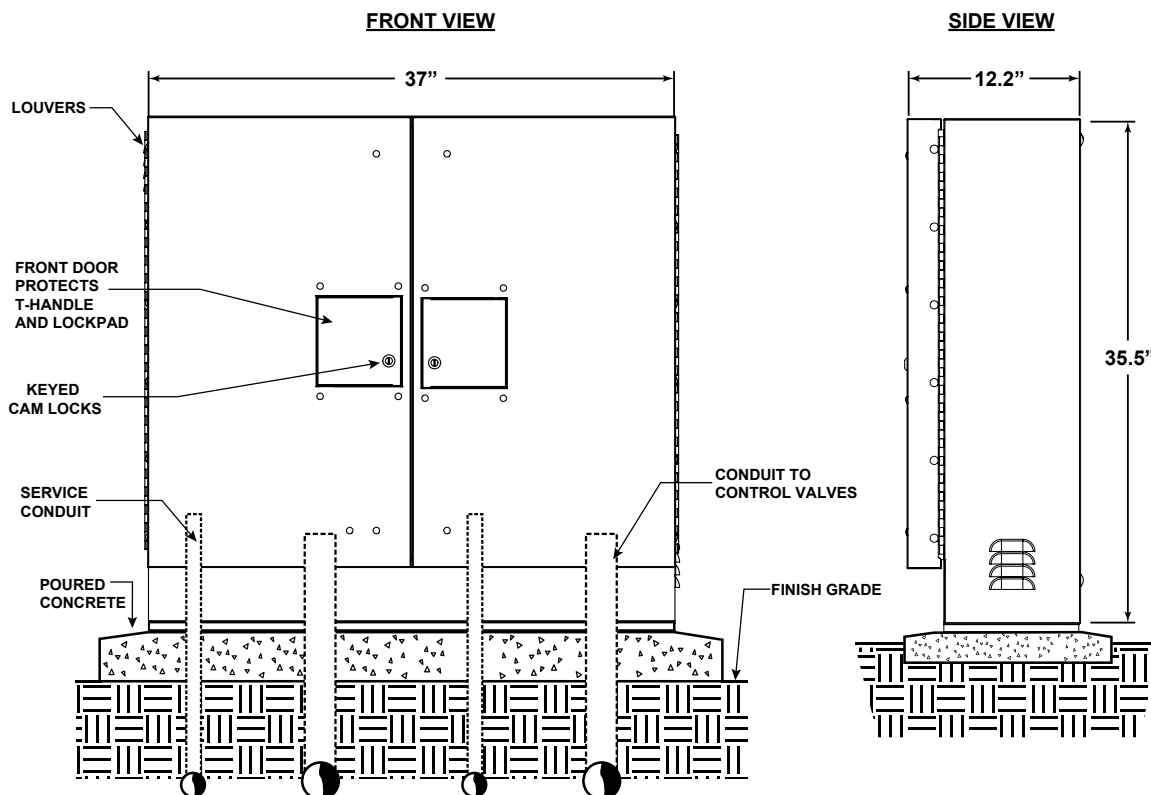

## SB-18DSS

| Dimensions   | Width | Height | Depth   |
|--------------|-------|--------|---------|
| Overall      | 19"   | 36"    | 25"     |
| Usable Space | 16"   | 32"    | 9" (x2) |
| Backboards   | 16"   | 32"    | --      |

### Features and Benefits


- 100% Stainless Steel construction
- Dual entry access
- Three point locking doors
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors included
- Two pre-drilled removable backboards included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

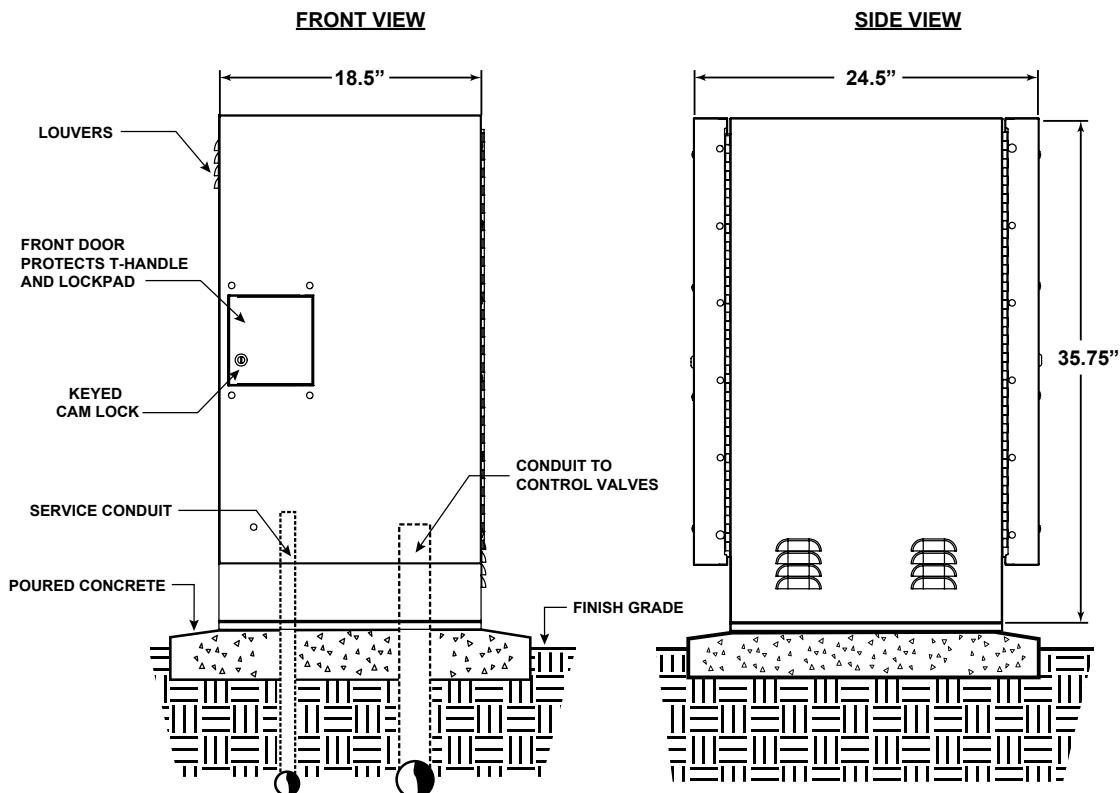

## SB-24DSS

| Dimensions   | Width | Height | Depth   |
|--------------|-------|--------|---------|
| Overall      | 25"   | 36"    | 25"     |
| Usable Space | 22"   | 33"    | 9" (x2) |
| Backboards   | 22"   | 33"    | --      |

### Features and Benefits


- 100% Stainless Steel construction
- Dual entry access
- Three point locking doors
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Mounting template and J bolt anchors included
- Two pre-drilled removable backboards included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

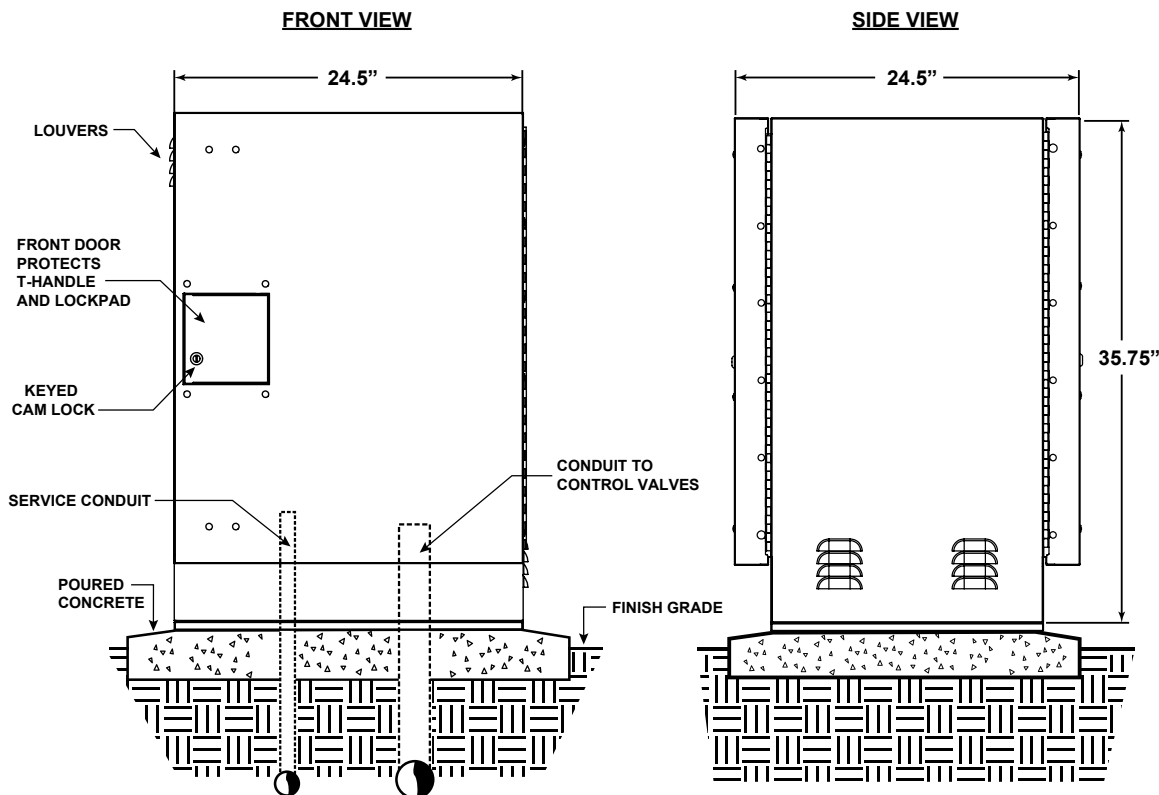

## SB-18SSW

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 19"   | 36"    | 12"   |
| Usable Space | 16"   | 32"    | 9"    |
| Backboard    | 16"   | 32"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Pre-drilled removable backboard included
- Mounting brackets and conduit ready bottom plate included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

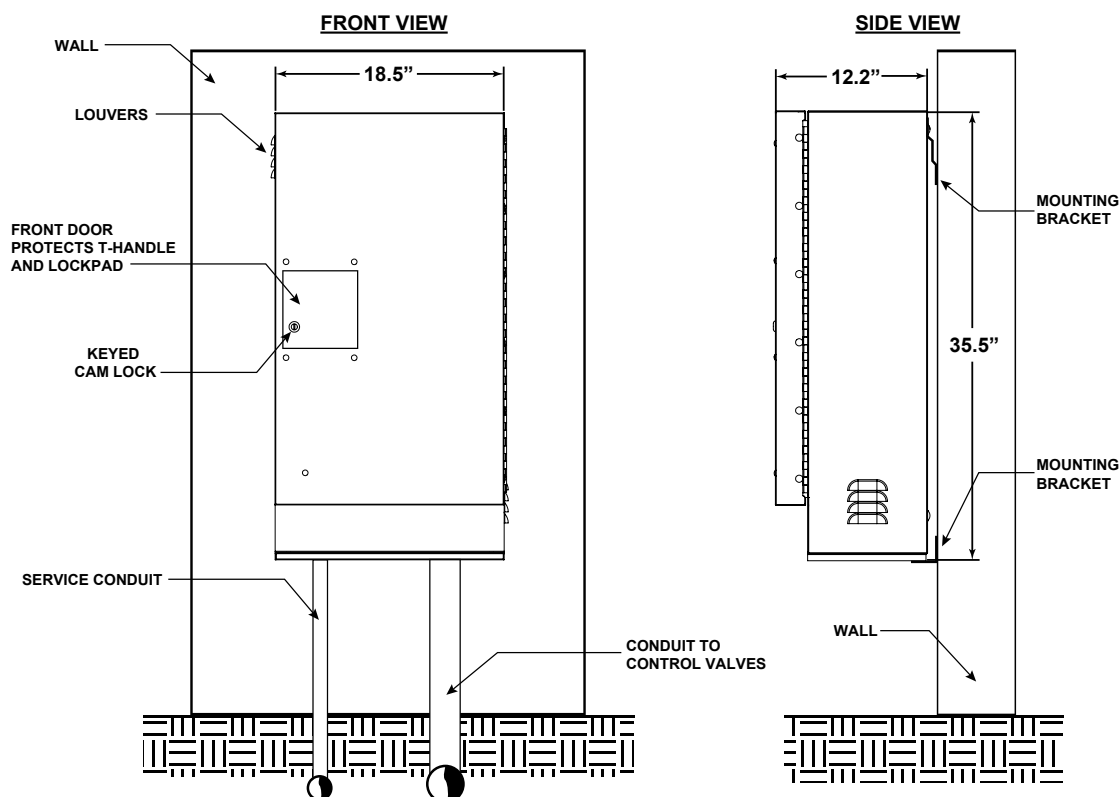

## SB-24SSW

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 25"   | 36"    | 12"   |
| Usable Space | 22"   | 33"    | 9"    |
| Backboard    | 22"   | 33"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Pre-drilled removable backboard included
- Mounting brackets and conduit ready bottom plate included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

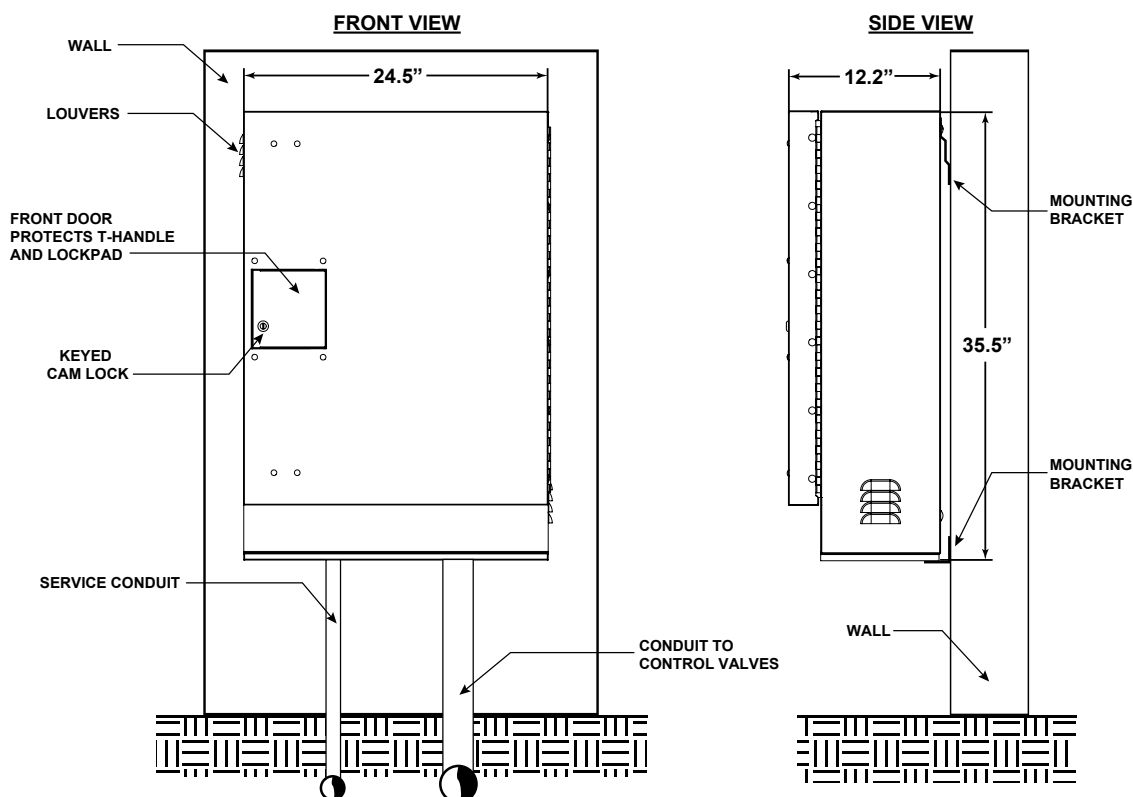

## SB-36SSW

| Dimensions   | Width    | Height | Depth |
|--------------|----------|--------|-------|
| Overall      | 37"      | 36"    | 12"   |
| Usable Space | 16" (x2) | 32"    | 9"    |
| Backboards   | 16"      | 32"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Three point locking doors
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Pre-drilled removable backboard included
- Mounting brackets and conduit ready bottom plate included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

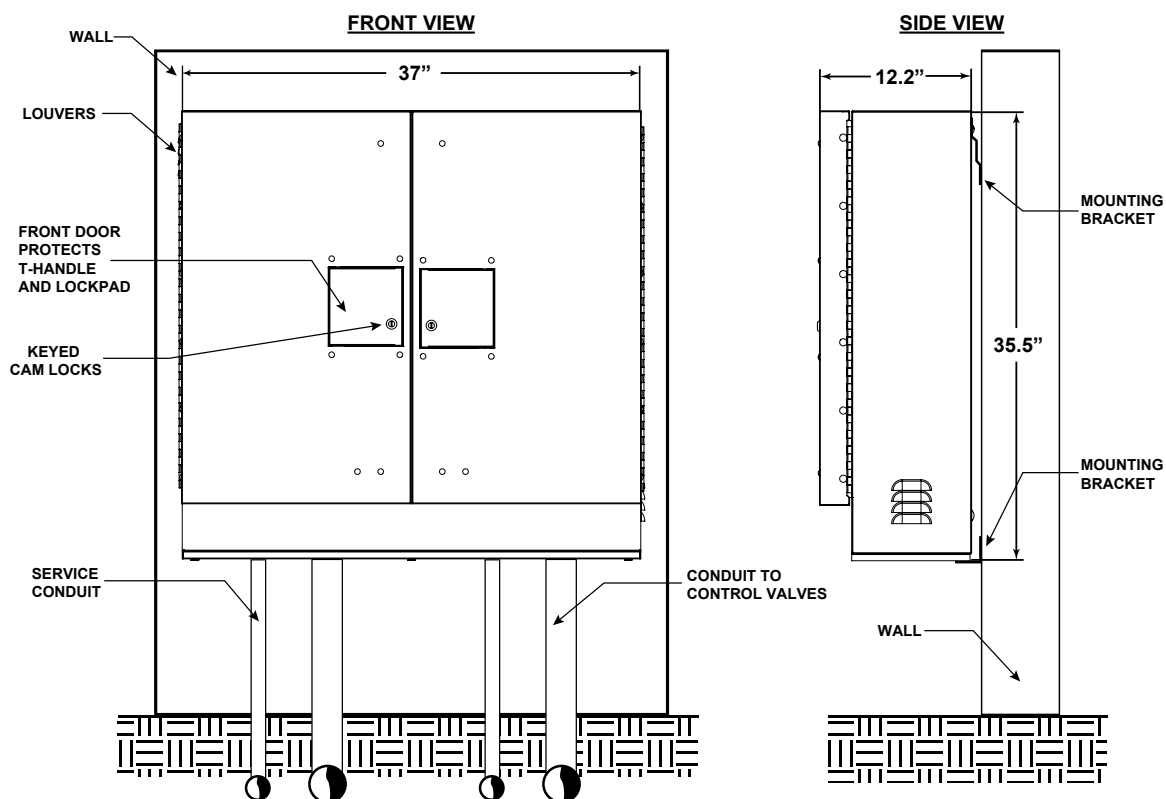

## SB-16SSW

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 16"   | 18"    | 11"   |
| Usable Space | 16"   | 14"    | 7"    |
| Backboard    | 16"   | 14"    | --    |

### Features and Benefits



- 100% Stainless Steel construction
- Three point locking door
- Filtered side louvers on top and bottom for cross ventilation
- Padlock security provisions
- Pre-drilled removable backboard included
- Mounting brackets and conduit ready bottom plate included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

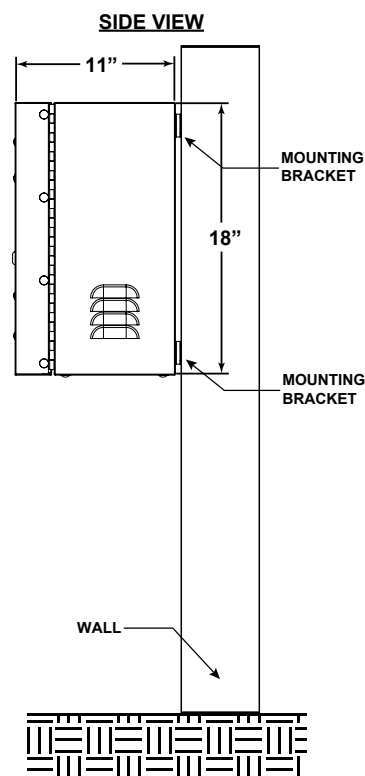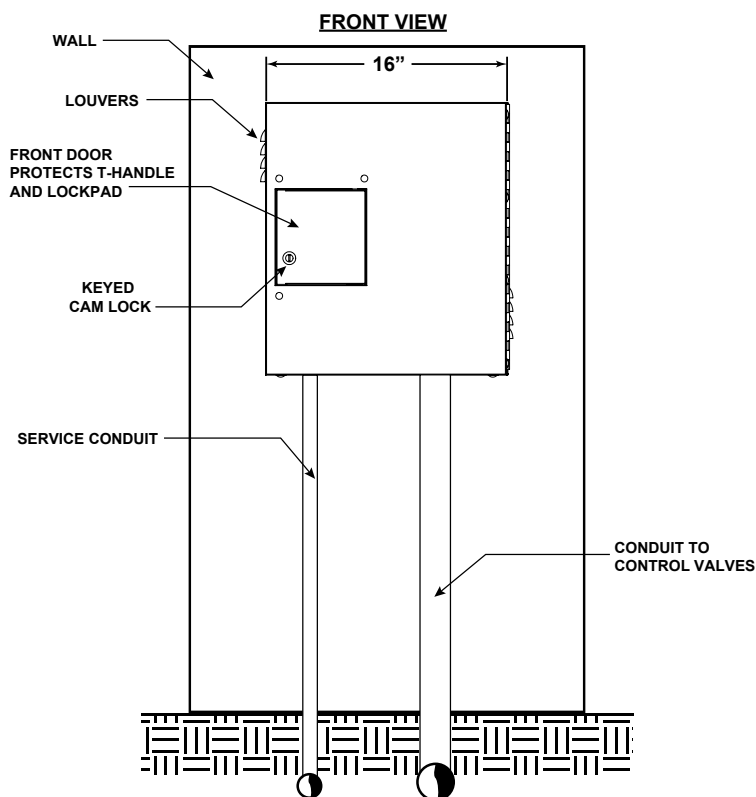

## LD-18SW

| Dimensions   | Width | Height | Depth |
|--------------|-------|--------|-------|
| Overall      | 19"   | 19"    | 8"    |
| Usable Space | 17"   | 17"    | 7"    |
| Backboard    | 17"   | 17"    | --    |

### Features and Benefits


- 100% Stainless Steel construction
- Keyed cam style lock
- Lift-off stainless steel hinges
- Pre-drilled removable backboard included
- Mounting brackets and conduit ready bottom plate included
- 10 Year Limited Warranty

### Compliance

- NEMA TYPE 3R Rated
- UL 508A Listed



Complete list of accessories on Page 41

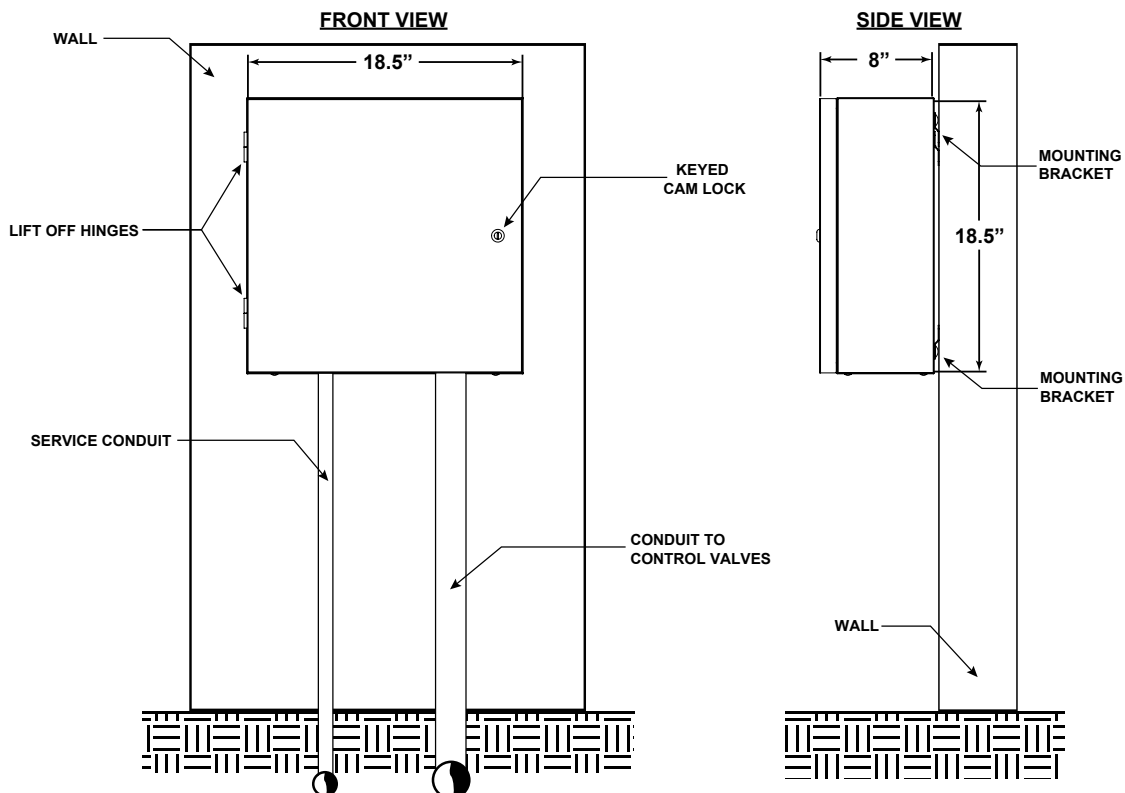

### QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



| Part Number   | Description                  |
|---------------|------------------------------|
| <b>QP-18</b>  | Used for SB-18SS   SB-1852SS |
| <b>QP-24</b>  | Used for SB-24SS             |
| <b>QP-18D</b> | Used for SB-18DSS            |
| <b>QP-24D</b> | Used for SB-24DSS            |

### PEDESTAL RISERS

Brings controls up to a more ergonomic height and prevent flood damage in high risk areas.



| Part Number      | Description                  |
|------------------|------------------------------|
| <b>PED-18SS</b>  | Used for SB-18SS   SB-1852SS |
| <b>PED-24SS</b>  | Used for SB-24SS             |
| <b>PED-36SS</b>  | Used for SB-36SS             |
| <b>PED-18DSS</b> | Used for SB-18DSS            |
| <b>PED-24DSS</b> | Used for SB-24DSS            |
| <b>PED-16SSW</b> | Used for SB-16SSW            |

### BACKBOARDS

Pre-drilled stainless steel backboards to fit any Control Enclosure.



| Part Number      | Description                                                 |
|------------------|-------------------------------------------------------------|
| <b>BB-18SS</b>   | Used for SB-18SS   SB-18SSW   SB-18DSS   SB-36SS   SB-36SSW |
| <b>BB-1852SS</b> | Used for SB-1852SS                                          |
| <b>BB-24SS</b>   | Used for SB-24SS   SB-24DSS   SB-24SSW                      |
| <b>BB-16SSW</b>  | Used for SB-16SSW                                           |
| <b>BB-18LD</b>   | Used for LD-18SW                                            |

### Control Enclosure FAQs

**1) Q: What material are StrongBox enclosures made of?**

**A:** StrongBox enclosures are made of 100% stainless steel for long term rust-proof durability.

**2) Q: Do the enclosures accept padlocks?**

**A:** All Heavy Duty control enclosures can be locked with a padlock

**3) Q: How do I install a StrongBox enclosure?**

**A:** Enclosures can be installed into fresh concrete or by using our QuickPad™ mounting system. QuickPad™ mounting system includes a mounting pad and support base that is securely attached to the bottom of the enclosure and buried for a stable, vandal resistant installation with no concrete needed.

**4) Q: Can I customize my StrongBox enclosure?**

**A:** StrongBox standard products cannot be modified. However, we do offer a full line of custom NEMA 4X wall mount enclosures and various add-ons for OEM customers. Contact [sales@strongbox.com](mailto:sales@strongbox.com) for details.

**5) Q: What is the lead time for StrongBox enclosures?**

**A:** StrongBox maintains a large inventory of our popular standard enclosures. Standard products are usually available to ship within 1-2 business days of receiving a purchase order.

**6) Q: Are StrongBox enclosures outdoor rated?**

**A:** Yes, our enclosures are NEMA 3R rated to protect against rain, sleet and snow. Due to the corrosion resistance, strength and heat dissipation properties of stainless steel, StrongBox enclosures are highly durable in outdoor applications with little to no maintenance needed.

The Terms and Conditions contained herein are the exclusive terms and conditions for the sale of Products (the "Products") from MUM Industries, Inc., doing business as The EMF Company®, Integra Enclosures®, and Strongbox® (collectively "MUM") to you, its Customer. Customer agrees that the terms and conditions stated herein and, to the extent not stated herein but contained on any MUM invoice, constitute the final, complete, exclusive expression of the agreement between MUM and Customer. In the event that any Customer form, purchase order, or any other document submitted by Customer contains terms and conditions in addition to or different from the terms and conditions herein or from any MUM invoice, Customer agrees, by so submitting its purchase order or order form, by receiving an order acknowledgment or by accepting Products produced by MUM, that such new or additional terms are rejected and that the language of the MUM terms and conditions control. Any and all new or additional terms contained on any Customer document (whether provided to MUM prior or subsequent to the delivery of these Terms and Conditions) are hereby expressly and completely rejected. Acceptance of Customer's order for Products from MUM is expressly limited to these terms and conditions.

1. Orders become effective only when accepted and approved by MUM. MUM's acceptance is expressly made conditional on the Customer's assent to the terms and conditions contained herein and to the terms and conditions of any proposal issued by MUM to the Customer, and MUM agrees to furnish the Products covered by the order only upon such terms and conditions. Any of the terms or provisions of the Customer's order which are inconsistent with the terms and provisions contained herein are not agreed to by MUM and shall not be binding on MUM and shall not be considered applicable to the sale or shipment of the Products ordered.
2. There shall be a minimum order amount of \$50.00 exclusive of freight.
3. Orders, shipments, and terms of payment are subject to the approval of MUM's credit department. Invoices shall be rendered when the Products are shipped. Terms of payment are net 30 days unless otherwise agreed by MUM. Any sums not paid within the specified net terms are subject to a service charge of 1.5% per month. No discount will be allowed to any Customer having an overdue balance. Any discounts previously granted to any Customer who fails to pay any MUM invoice when due will be immediately forfeited and lost. Any discount forfeited or lost due to untimely payment of any invoice will be billed to Customer, which shall be immediately due and payable. Customer will pay all costs, collection agency commissions, expenses and all reasonable attorney fees incurred in the collection of any past-due sums. By submitting an order or taking receipt of MUM Products, Customer consents to the exclusive jurisdiction of the state and federal courts located in the State of Ohio. Customer shall be deemed to have accepted the Products shipped by MUM within ten (10) days after delivery to Customer. After acceptance, Customer shall not be entitled to reject the Products that are not in accordance with these terms and conditions. MUM reserves the right to refrain from performing any work on any of Customer's orders should any of Customer's account(s) or jobs with MUM be or become past due. Payments shall be made to MUM Industries, P. O. Box 1870, Mentor, OH 44061-1870, or at such other address listed on the MUM invoice.
4. Products are sold FOB MUM's facility and title shall pass upon delivery to the carrier. MUM is not responsible for any loss or damage incurred in transit and any claim must be made by the Customer. MUM shall assist in the filing of any claim, at Customer's request.
5. Customer must inspect all shipments within 48 hours of receipt. Damage caused by or during transport or delivery must be reported to the freight carrier listed on the bill of lading. Discrepancies in Product quantities must be reported to MUM office within 72 hours from receipt.
6. Shipment dates are given based on current inventories and production plans. However, MUM shall not be responsible for any partial or total failure to deliver or for any delay incurred or caused by accidents, delays in transportation, fires, explosions, floods, earthquakes, or other acts of nature, riots, strikes, or other causes beyond MUM's reasonable control.
7. Orders for non-standard Products, such as modified Products or Products produced to Customer's specifications, are not cancelable and not returnable without MUM's prior consent. Should cancellation consent be given, MUM reserves the right to recover all direct costs incurred as a result of such cancellation. Further, no returns are accepted on electrical components or assemblies containing electrical components such as transition boxes, meter and power pedestals.
8. Eligible Products may be returned at Customer's request only upon the approval of MUM. Products must be in re-sellable condition and in their original

packaging. No cash refunds will be provided for returned Products. MUM will issue a credit memorandum for any authorized Products return. Said credit memorandum will have no cash value and shall expire one (1) year after issuance. Authorized Returns not accompanied by a new order of greater or equal value shall be subject to a restocking fee of 25% of the original sale price. Products authorized for return must be protected thoroughly, and, if applicable, multiple Product units or items must be separated with cardboard and Product units must be upright and secured on pallets. Products must be returned to the MUM facility, along with a copy of the return authorization, within 30 days of issuance of the return authorization. Returned Products must be free of damage and must be in a condition for immediate resale in a "new" condition. Final credit will be given upon return to factory and inspection. Returned Products that are damaged will not be accepted by MUM for credit and will be returned to Customer at Customer's shipping and freight cost

9. MUM warrants to Customer that the Products manufactured by MUM and sold to Customer will be free from defects in material and workmanship for the following periods of time: Polycarbonate - One (1) year; Stainless Steel - Ten (10) years; Mild Steel - One (1) year; Cold Rolled Steel - One (1) year; and Aluminum - Five (5) years. These dates are from the date of shipment from the MUM facility. This warranty is subject to receipt of written notification by Customer to MUM within the warranty period. Any determination as to whether Products are defective shall be in MUM's sole and exclusive discretion. Any warranty claim is further subject to Customer's return of defective Products to a destination specified by MUM. Under no circumstances will credit be allowed for unauthorized return of any Products. MUM cannot and does not assume liability for defective Product components, or damage caused by defective Product components, not manufactured or supplied by it, even though such components be incorporated into or used in conjunction with MUM Products. MUM reserves the right to redesign, alter, or modify its Products without notice and without incurring any liability from Customer or any claim that such change makes any parts, components, or Products obsolete.

NO EMPLOYEE, REPRESENTATIVE OR DISTRIBUTOR IS AUTHORIZED TO CHANGE THE FOREGOING WARRANTIES IN ANY WAY OR GRANT ANY OTHER WARRANTY ON BEHALF OF MUM. THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES (INCLUDING WARRANTY OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE) AND NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, ARE MADE BY MUM IN CONNECTION WITH MANUFACTURE OR SALE OF ITS PRODUCTS. THE LIABILITY OF MUM, WHETHER IN CONTRACT, TORT, UNDER ANY WARRANTY, OR OTHERWISE, SHALL NOT EXTEND BEYOND ITS OBLIGATION TO REPAIR OR REPLACE, AT ITS OPTION, ANY PRODUCT OR PART FOUND BY MUM TO BE DEFECTIVE IN MATERIAL OR WORKMANSHIP. MUM SHALL NOT BE LIABLE FOR THE COST OF REMOVAL OR INSTALLATION AND/OR SHALL NOT BE RESPONSIBLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES OF ANY NATURE.

Whether based on any Warranty claim or otherwise, MUM will not, in ANY event, be liable for any loss of profit, interruption of business, or any other special, consequential, or incidental damages suffered or sustained by Customer. MUM's total maximum liability to Customer in respect of the manufacture and sale of Products is limited to the Warranty stated herein, and if any claim by Customer is based on a theory other than the Warranties, then the damages are limited to the total monies received by MUM from the Customer for the particular Products described in Customer's order. The total maximum liability for scheduled orders that are drawn down against each month will be the monthly total of the affected order or the total value of the items affected, whichever is the lesser.

10. Any assistance, suggestions, or technical advice given to the Customer by MUM or any agent thereof concerning dimensions, specifications, handling, installation, testing, storage, use, or placement in service of any Products is an accommodation for which MUM shall have no liability unless such liability expressly assumed by MUM in writing and signed by an officer of MUM.

11. No employee, agent, or representative of MUM has the authority or power to add, waive, or amend these terms and conditions unless first authorized in writing by an officer of MUM. Any transaction with Customer shall be construed under the laws of the State of Ohio. Waiver of MUM of any breach shall not thereafter be deemed a waiver of a subsequent breach of the same of any other provision hereof.

NEMA 3R RATED

UL 508A LISTED

EUSERC COMPLIANT



**STRONGBOX**<sup>®</sup>  
— ELECTRICAL —