

SSP

Dimensions	Width	Height	Depth
Overall	26"	50"	17"
Customer Section	7"	28"	6"

Features and Benefits

- 100% Stainless Steel construction
- Separate compartments with lift up top section
- Utility section houses landing lugs
- Hinged viewing window for easy programming
- All access points include padlock provisions
- Anchor bolts included
- 10 Year Limited Warranty

Meter Section

- Meter Socket:
 - 4 Jaw, 5 Jaw, and 7 Jaw
- Ringed or Ringless versions available


Compliance

- EUSERC 308*
- Caltrans Type III-BF
- NEMA TYPE 3R Rated
- UL 508A Listed



SSP Model Configurations: Choose one Blue number per section to create your part number (example SSP-11016-10)

Model No. - Phase	Main Amps	Breaker Pos	AIC Rating	Extra Options
SSP				
1 - 1ph (120/240V)	06 - 60A	16 - 16 Pos	10 - 10,000	L - Lever Bypass
2 - 1ph (240/480V)	10 - 100A	18 - 18 Pos	14 - 14,000	U - Un-Metered
3 - 3ph (208/120V)	12 - 125A	24 - 24 Pos	22 - 22,000	S - Switched Load Center
4 - 3ph (240V)	15 - 150A	26 - 26 Pos	35 - 35,000	P - Bolt on Breakers
5 - 1ph (120/208V)	17 - 175A	30 - 30 Pos	65 - 65,000	F - Subfeed Breaker
6 - 3ph (480/277V)	20 - 200A		85 - 85,000	
7 - 1ph (277/480V)			100 - 100,000	
8 - 3ph (240/120V)			T - T-Fuse	

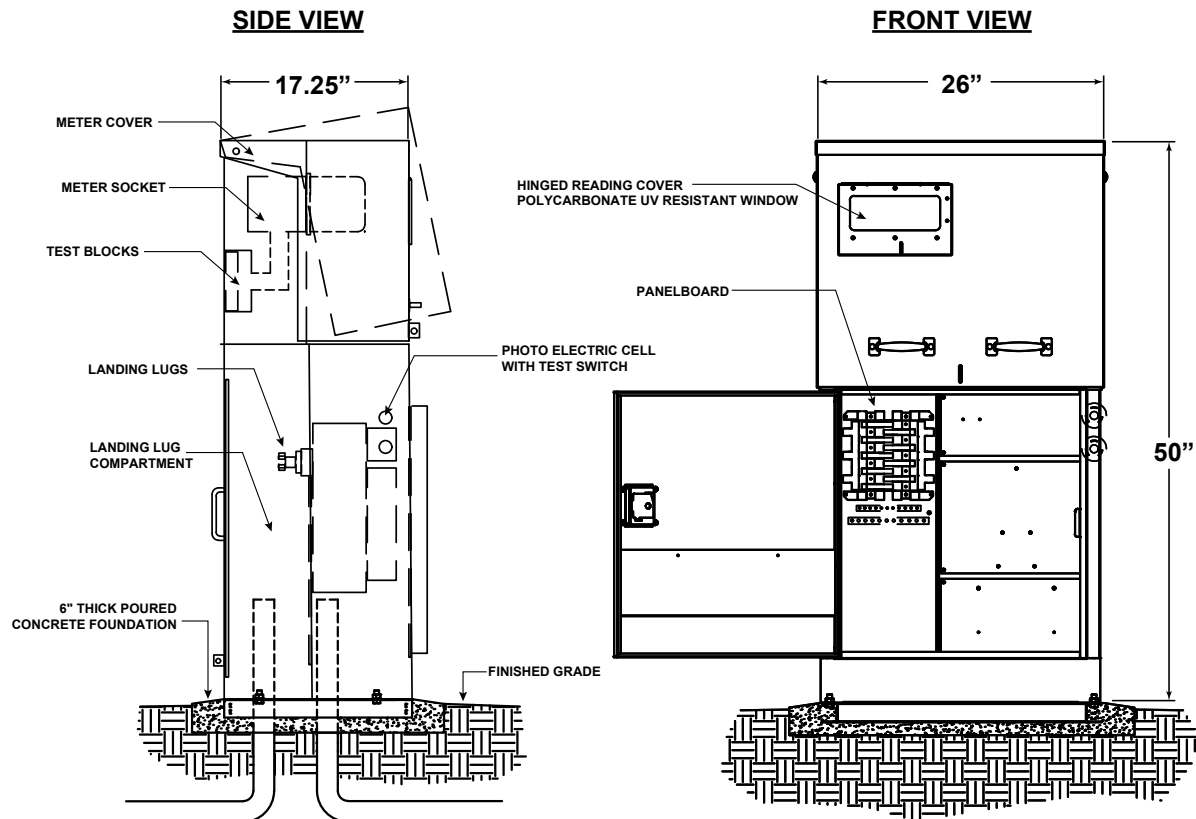

Accessories for SSP (for complete accessories, see page 26)



CSP-C BASE
MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.

Overall Dims: 24 x 2 x 17 in

SSP-PED
PEDESTAL RISER

Brings controls up to a more ergonomic level and prevents flooding damage.

Overall Dims: 25 x 6 x 17 in

Conduit Cutout: 23 x 5 in

**ADDITIONAL
ACCESSORIES**

- Time Clocks
- Branch Breakers
- Contact Block
- Photocells
- Surge Protectors

QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



Part Number	Description
QP-MPS	Used for MPS
QP-MPE	Used for MPE
QP-CSP	Used for CSP ECS PWP
QP-M	Used For SB24SS/240V

PEDESTAL RISER


Bring controls up to a more ergonomic height and prevent flood damage in high risk areas.



Part Number	Description
PED-CSP18	Used for CSP ECS PWP
SSP-PED	Used for SSP DSP
PED24SS-240V	Used for SB24SS/240V

MOUNTING BASE

The go-to solution for mounting pedestals in new or existing concrete.



Part Number	Description
MPS BASE	Used for MPS
MPE BASE	Used for MPE
CSP-B BASE	Used for CSP ECS PWP
CSP-C BASE	Used for SSP DSP ESS
XLP BASE	Used for XLP

MISC ACCESSORIES



BREAKERS, CONTACT BLOCKS, SURGE PROTECTORS

StrongBox offers a wide range of Siemens brand branch breakers, contact blocks and surge protectors.

TIME CLOCKS

Electronic time switch to program automatic events with to-the-minute accuracy

PHOTOCELLS

Dusk-to-dawn sensing module using natural light levels to control operations.

CUSTOM QUOTES

StrongBox Service Pedestals can be configured to meet your project's electrical requirements. Custom quotes are typically delivered within 1-2 business days depending on project complexity.

To get a custom quote, submit a panel schedule or one-line diagram. If not available provide the information to the right.

PROJECT SUBMITTAL

When receiving a custom meter quote from StrongBox, our in-house engineering team can also create a project submittal sheet with a hold for release purchase order.

Information required for custom quote:

- Voltage/Phase
- Max Amperage
- Distribution Size
- AIC Rating
- Additional breakers and accessories

StrongBox submittal packages include detailed project information such as:

- Wiring diagrams
- Product dimensions
- Component specifications
- General notes and construction details

Sample Submittal Sheet

[illegible]

Ready to get started? Email your project specifications to quotes@strongbox.com