

Smooth Touch Front Entry - Stainless

- ASSE 1060 Rated
- Stainless Steel Tube and Wire Construction
- Powdercoated in Performance Polymer Alloy
- Curved edges for Safe Handling
- Stainless Steel Hardware
- Hinged Door and Body Lift Up for Easy Access
- Concealed Tab Locking System Accepts Padlock
- 10-Year Limited Warranty





Enclosure Sizes

Part Number	Width	Height	Depth	Weight
SBBC-20SS	23"	49"	19"	62 lbs
Inside Dimensions	18.0"	48.5"	14.0"	--
Mounting Frame	18.0"	--	14.0"	--
SBBC-22SS	25"	28"	19"	44 lbs
Inside Dimensions	20.0"	27.0"	14.0"	--
Mounting Frame	20.0"	--	14.0"	--
SBBC-30SS	32"	28"	19"	53 lbs
Inside Dimensions	27.0"	27.0"	14.0"	--
Mounting Frame	27.0"	--	14.0"	--
SBBC-45SS	47"	28"	19"	61 lbs
Inside Dimensions	42.0"	27.00"	14.0"	--
Mounting Frame	42.0"	--	14.0"	--



Compatible Backflows (Chart displays commonly used backflows. For complete list, visit www.strongbox.com)

SBBC-20SS			SBBC-22SS		SBBC-30SS		SBBC-45SS	
	Model	Size	Model	Size	Model	Size	Model	Size
WILKINS	--	--	420XL PVB	1/2" - 1"	375	3/4" - 1"	375	1 1/4" - 2"
	--	--	460XL PVB	3/8" - 1"	975XL2	3/4" - 1"	975XL2	1 1/4" - 2"
	--	--	720A	1/2" - 2"	975XL3	3/4" - 1"	975XL3	1 1/4" - 2"
	--	--	350XL	3/4"	350XL	1" - 1 1/2"	475	2 1/2" - 3"
	--	--	375XL RP	1/2" - 3/4"	950XL	3/4" - 1"	350XL	2"
	--	--	975XL3N RP	3/4" - 2"	950XLT	3/4" - 1"	950XL	1 1/4" - 2"
	--	--	--	--	375XL RP	1" - 1 1/2"	950XLT	1 1/4" - 2"
FEBCO	--	--	--	--	--	--	375XL RP	2"
	--	--	825YA / LF	3/4" - 2"	825Y / LF	3/4" - 1"	825Y / LF	1 1/2" - 2"
	--	--	860 / LF	3/4" - 1"	860 / LF	1 1/4" - 2"	LF880V NRS	2 1/2" - 6"
WATTS	--	--	765 PVB	1/2" - 2"	--	--	--	--
	--	--	LF-009 / FS	3/4" - 1"	LF-009 / FS	1 1/4" - 2"	U009QT / M2QT	1 1/4" - 2"
	--	--	LF800M4-QT-FZ	1/2" - 2"	U009QT / M2QT	3/4" - 1"	957 NRS	2 1/2" - 4"
	--	--	LF007	1/2"	LF007	3/4" 1 1/4"	LF007	1 1/2" - 2"

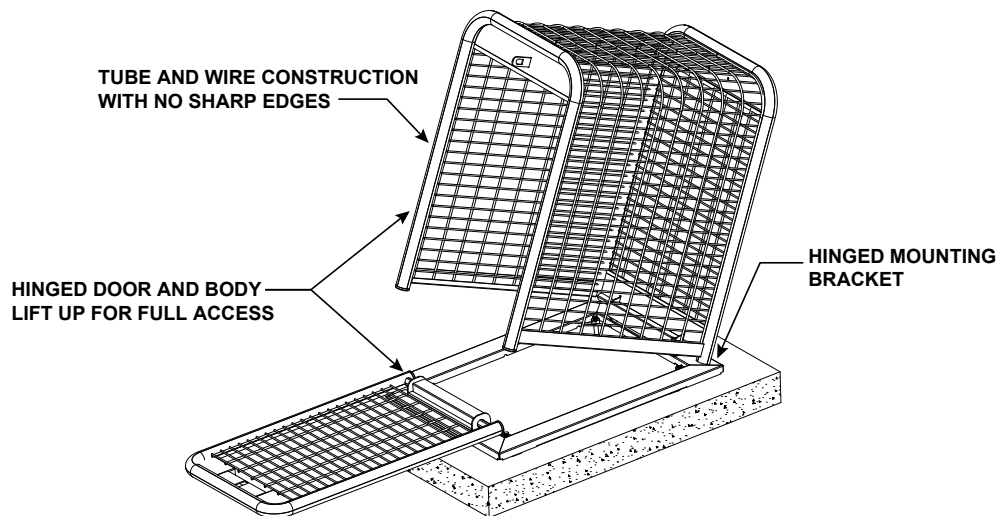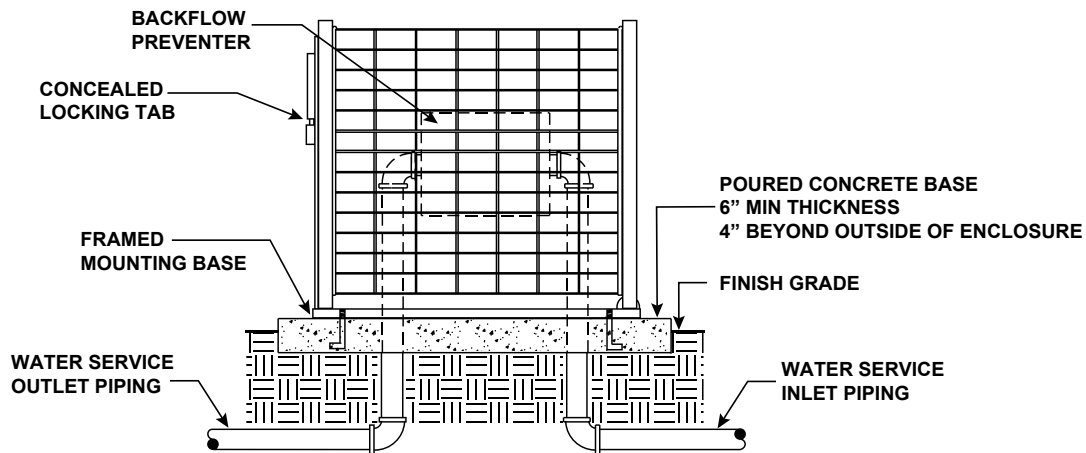

Options for Smooth Touch Front Entry Enclosures (for complete accessories, see page 70)



**QUICKPAD™
MOUNTING SYSTEM**

Fast and secure mounting with no concrete required!



**POLAR BEARIER
INSULATING COVER**

Protects from frost with R-30 insulation rating.

QUICK PAD™

Easy installation with no concrete required! Save hours on installation time and cost.



Part Number	Description		
QP-20BF	Used for SBBC-20SS		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	32" width	19" height	--
Conduit Cutout	18" width	10" height	--
QP-22BF	Used for SBBC-22AL SBBC-22SS SBBC-22CR		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	29" width	19" height	--
Conduit Cutout	14" width	11" height	--
QP-30BF	Used for SBBC-30AL SBBC-30SS SBBC-30CR		
Overall Dimensions	36" width	16" height	22" depth
Mounting Pad	32" width	19" height	--
Conduit Cutout	24" width	10" height	--
QP-45BF	Used for SBBC-45AL SBBC-45SS SBBC-45CR		
Overall Dimensions	53" width	16" height	22" depth
Mounting Pad	49" width	19" height	--
Conduit Cutout	42" width	10" height	--

POLAR BEARIER BAGS

R-30 insulated cover to protect your backflow device from frost and moisture



Part Number	Description		
PBB-22	Used for SBBC-22AL SBBC-22SS SBBC-22CR		
Overall Dimensions	22" width	24" height	6" depth
PBB-30	Used for SBBC-30AL SBBC-30SS SBBC-30CR BC-30CR		
Overall Dimensions	28" width	24" height	6" depth
PBB-45	Used for SBBC-45AL SBBC-45SS SBBC-45CR BC-45CR		
Overall Dimensions	46" width	24" height	6" depth
PBB-60	Used for SBBC-60AL SBBC-60SS SBBC-60CR		
Overall Dimensions	56" width	24" height	6" depth
PBB-20HP	Used for SBBC-20SS		
Overall Dimensions	24" width	46" height	6" depth
PBB-40HP	Used for SBBC-40ALHP SBBC-40SS SBBC-40CR		
Overall Dimensions	40" width	36" height	6" depth
PBB-60HP	Used for SBBC-60ALHP SBBC-60SS SBBC-60CR		
Overall Dimensions	60" width	36" height	6" depth
PBB-75HP	Used for SBBC-75ALHP SBBC-75SS SBBC-75CR BC-75CR		
Overall Dimensions	72" width	36" height	6" depth
PBB-90HP	Used for SBBC-90ALHP		
Overall Dimensions	90" width	36" height	6" depth