

CONTROL ENCLOSURES

NEMA TYPE 3R and UL 508A LISTED

HEAVY DUTY FRONT ENTRY



- 100% Stainless Steel
- Filtered side louvers on top and bottom
- Pre-drilled removable backboard included
- Concealed three-point locking latch for maximum security
- All access points include padlock provisions

HEAVY DUTY TOP ENTRY



- 100% Stainless Steel
- Hinged flip top with three-point latching system
- Angled mounting tray for ergonomic control placement
- Separate bottom compartment for additional storage
- Pre-drilled removable backboard included

HEAVY DUTY WALL MOUNT




- 100% Stainless Steel
- One and two door options available
- Concealed three-point locking latch for maximum security
- Pre-drilled removable backboard, wall mount brackets and conduit ready bottom plate included

LIGHT DUTY ENCLOSURES



- 100% Stainless Steel
- Pre-drilled removable backboard included
- Keyed quarter-turn latch
- Pedestal, Wall Mount, and Top Mount configurations available

QUICKPAD™



- Easily install your StrongBox enclosure with no concrete required
- Highly Durable
- Corrosion Resistant
- Vandal Resistant

PEDESTAL RISER



- 100% Stainless-Steel
- Brings enclosure up to a more ergonomic level
- Prevents water damage in high risk flood areas
- Concealed bolts for maximum security

SB-18SS

Dimensions	Width	Height	Depth
External	19"	36"	12"
Usable Space	15"	31"	9"
Backboard	15"	31"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
* DX2	6-48	X
* DX3	8-96	X
* Eagle Plus	8-48	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
* ICC2	8-54	X
* HCC	8-54	X
* ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
PL4800	12-48	X
SL1600	4-16	X
SL1620	20	X
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

X Room for one controller

* Contact factory for controller specific backboards and trays

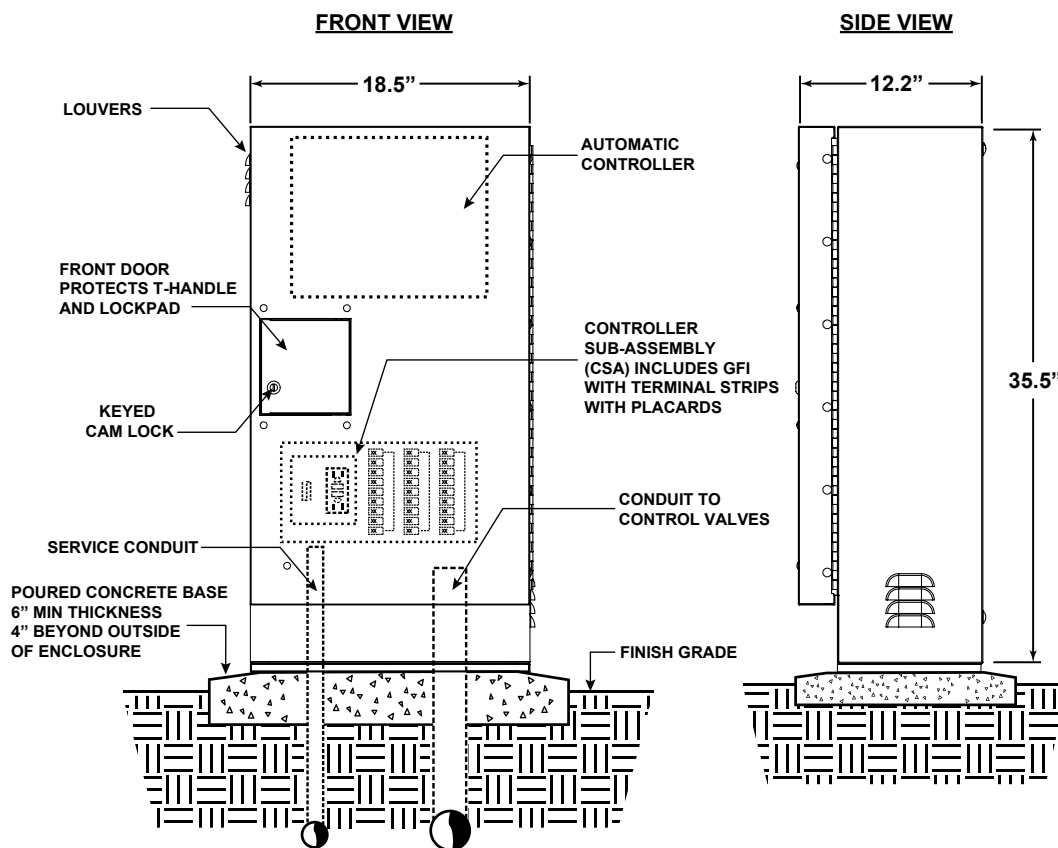

Options for SB-18SS (for complete accessories, see page 36)



PED-18SS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 19" x 12" x 10"

Conduit Cutout: 16" x 7"



QP-18 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 22"

Mounting Pad: 28.5" x 18.5"

Conduit Cutout: 15" x 7"

WALLMOUNT VERSION AVAILABLE!



SB-18SSW WALLMOUNT ENCLOSURE

Wallmount brackets and bottom plate included.

See page 22 for details.

SB-1852SS

Dimensions	Width	Height	Depth
Overall	18"	52"	12"
Usable Space	16"	45"	9"
Backboard	16"	45"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Sold Separately
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
DX2	6-48	X
DX3	8-96	X
Eagle Plus	8-48	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
PL4800	12-48	X
SL1600	4-16	X
SL1620	20	X
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

X Room for one controller

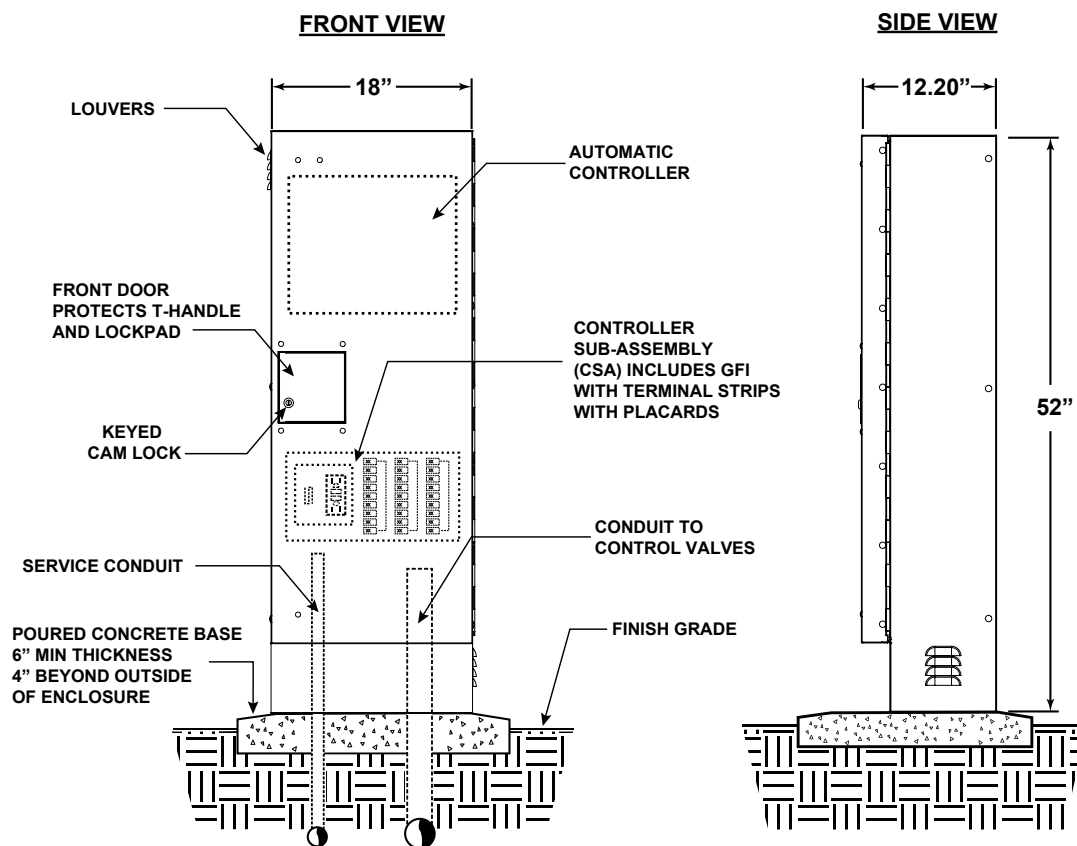

Options for SB-1852SS (for complete accessories, see page 36)



PT-TEMP1852 MOUNTING TEMPLATE

Allows for easy mounting of stand-alone enclosure. Hardware included.

Overall Dims: 18" x 10"

Conduit Cutout: 13" x 7"



QP-18 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 22"

Mounting Pad: 28.5" x 18.5"

Conduit Cutout: 15" x 7"

SB-24SS

Dimensions	Width	Height	Depth
Overall	25"	36"	12"
Usable Space	22"	33"	9"
Backboard	22"	33"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	X
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

- X Room for one controller
XX Room for two controllers

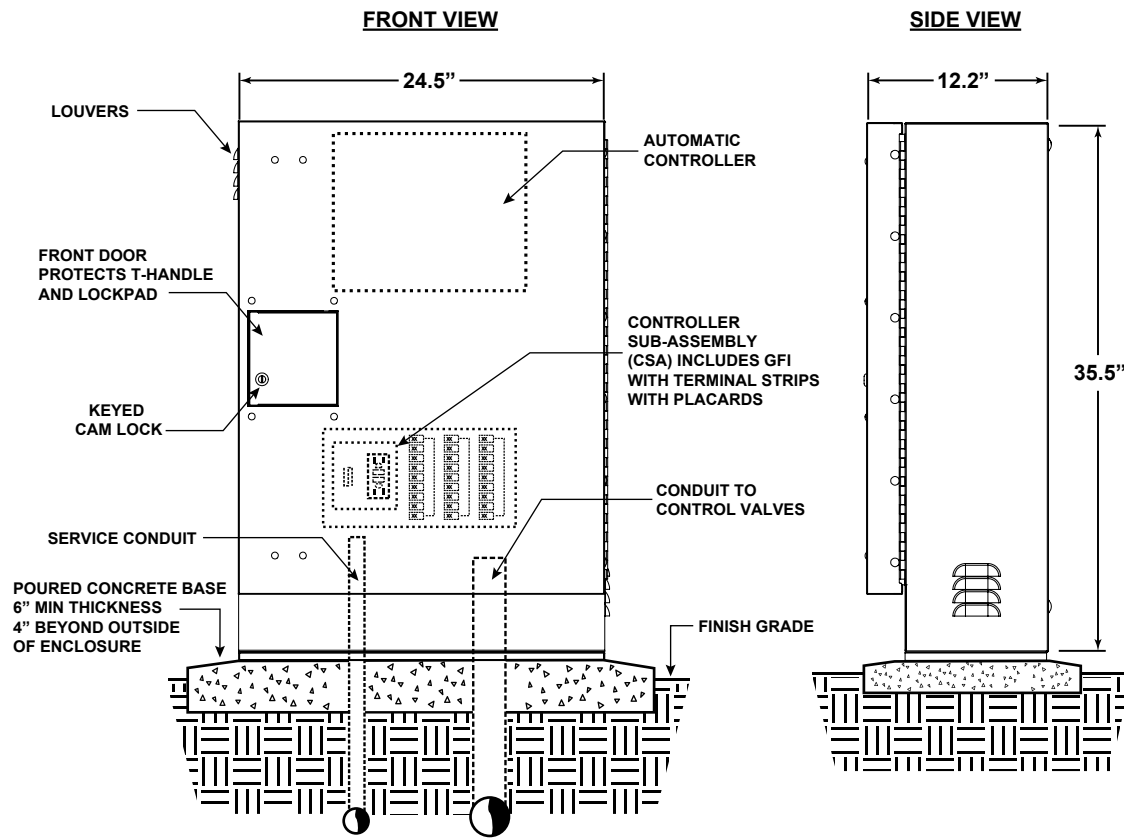

Options for SB-24SS (for complete accessories, see page 36)



PED-24SS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 25" x 12" x 10"

Conduit Cutout: 22" x 7"



QP-24 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 22"

Mounting Pad: 28.5" x 18.5"

Conduit Cutout: 21" x 7"

WALLMOUNT VERSION AVAILABLE!



SB-24SSW WALLMOUNT ENCLOSURE

Wallmount brackets and bottom plate included.

See page 24 for details.

SB-36SS

Dimensions	Width	Height	Depth
Overall	37"	36"	12"
Usable Space	32"	32"	9"
Backboards (2)	16"	32"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Doors
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Included
- Two Pre-Drilled Removable Backboards Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	XX
ESP-SAT	40	XX
ESP-SITE SAT	40	XX
ESP-LXME2	12-48	XX
ESP-LXIVM	60-240	XX
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	XX
RME Eagle EG	6-36	XX
RME Eagle-I central	6-36	XX
Toro	Stations	Capacity
TMC-424	4-24	XX
Sentinel WallMount	12-48	XX
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	XX
I-Core-600-M	6	XX
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	XX
PRO-HC	6-24	XX
* ICC2	8-54	XX
* HCC	8-54	XX
* ACC2 Series	12-54	XX
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	XX
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	XX
SL9648TW	48	XX
SL9696TW	96	XX
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	XX
Calsense	Stations	Capacity
CS3000	8-48	XX

XX Room for two controllers

- ★ Contact factory for controller specific backboards and trays

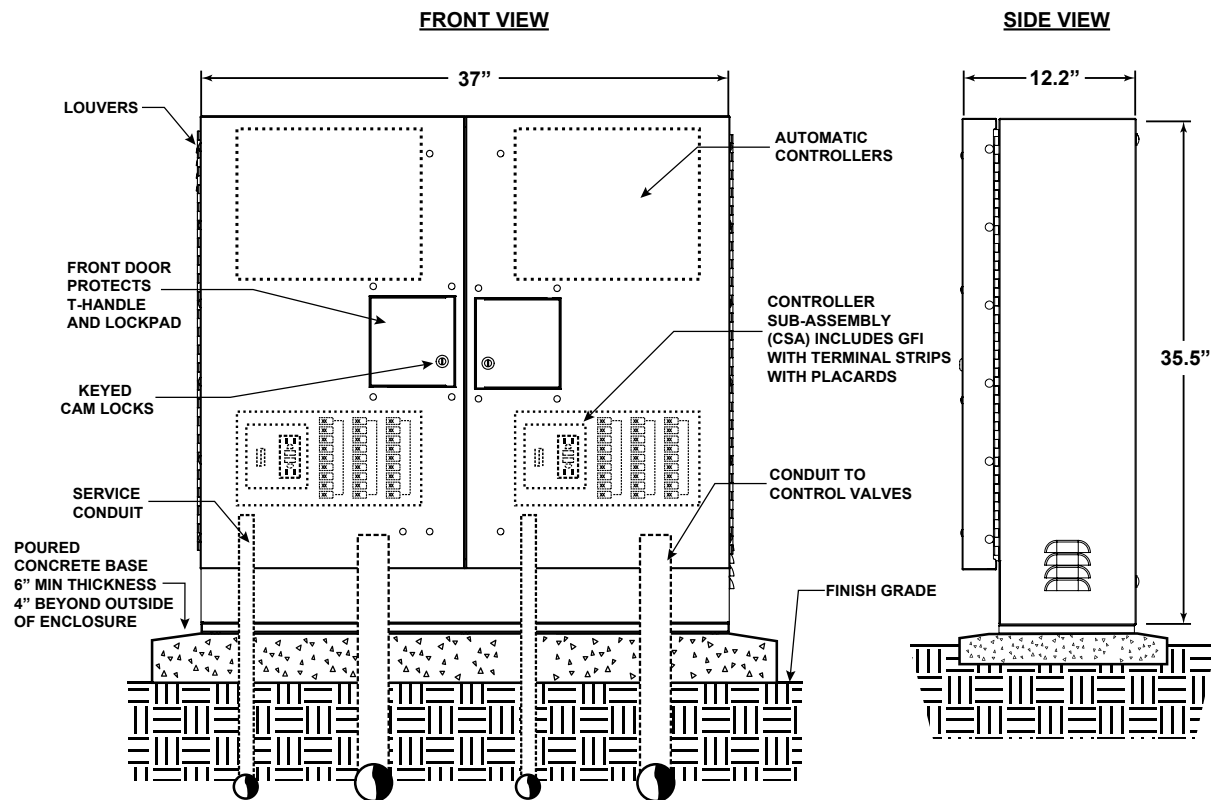

Options for SB-36SS (for complete accessories, see page 36)



PED-36SS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 37" x 12" x 10"

Conduit Cutout: 35" x 7"

WALLMOUNT VERSION AVAILABLE!



SB-36SSW WALLMOUNT ENCLOSURE

Wallmount brackets and bottom plate included.

See page 26 for details.

SB-18DSS

Dimensions	Width	Height	Depth
Overall	19"	36"	24"
Usable Space	16"	32"	9" (x2)
Backboards (2)	16"	32"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Doors
- Dual Entry Access
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Included
- Two Pre-Drilled Removable Backboards Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	XX
ESP-SAT	40	XX
ESP-SITE SAT	40	XX
ESP-LXME2	12-48	XX
ESP-LXIVM	60-240	XX
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	XX
RME Eagle EG	6-36	XX
RME Eagle-I central	6-36	XX
Toro	Stations	Capacity
TMC-424	4-24	XX
Sentinel WallMount	12-48	XX
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	XX
I-Core-600-M	6	XX
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	XX
PRO-HC	6-24	XX
* ICC2	8-54	XX
* HCC	8-54	XX
* ACC2 Series	12-54	XX
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	XX
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	XX
SL9648TW	48	XX
SL9696TW	96	XX
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	XX
Calsense	Stations	Capacity
CS3000	8-48	XX

XX Room for two controllers

- ★ Contact factory for controller specific backboards and trays

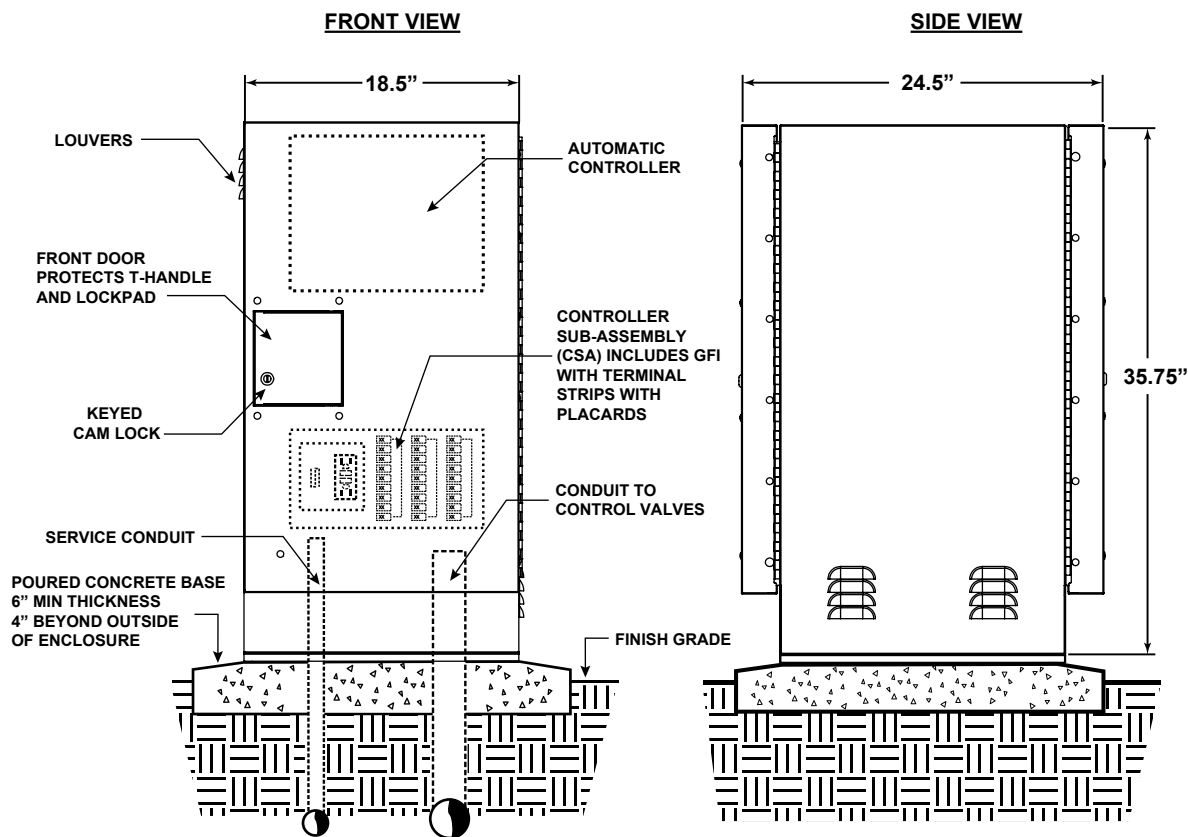

Options for SB-18DSS (for complete accessories, see page 36)



PED-18DSS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 19" x 13" x 19"

Conduit Cutout: 16" x 17"



QP-18D QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 29"

Mounting Pad: 28.5" x 28.5"

Conduit Cutout: 15.6" x 10.5"

SB-24DSS

Dimensions	Width	Height	Depth
Overall	25"	36"	24"
Usable Space	22"	33"	9" (x2)
Backboards (2)	22"	33"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Doors
- Dual Entry Access
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Template and J Bolt Anchors Included
- Two Pre-Drilled Removable Backboards Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	XX
ESP-SAT	40	XX
ESP-SITE SAT	40	XX
ESP-LXME2	12-48	XX
ESP-LXIVM	60-240	XX
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	XX
RME Eagle EG	6-36	XX
RME Eagle-I central	6-36	XX
Toro	Stations	Capacity
TMC-424	4-24	XX
Sentinel WallMount	12-48	XX
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	XX
I-Core-600-M	6	XX
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	XX
PRO-HC	6-24	XX
ICC2	8-54	XX
HCC	8-54	XX
ACC2 Series	12-54	XX
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	XX
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	XX
SL9648TW	48	XX
SL9696TW	96	XX
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	XX
Calsense	Stations	Capacity
CS3000	8-48	XX

XX Room for two controllers

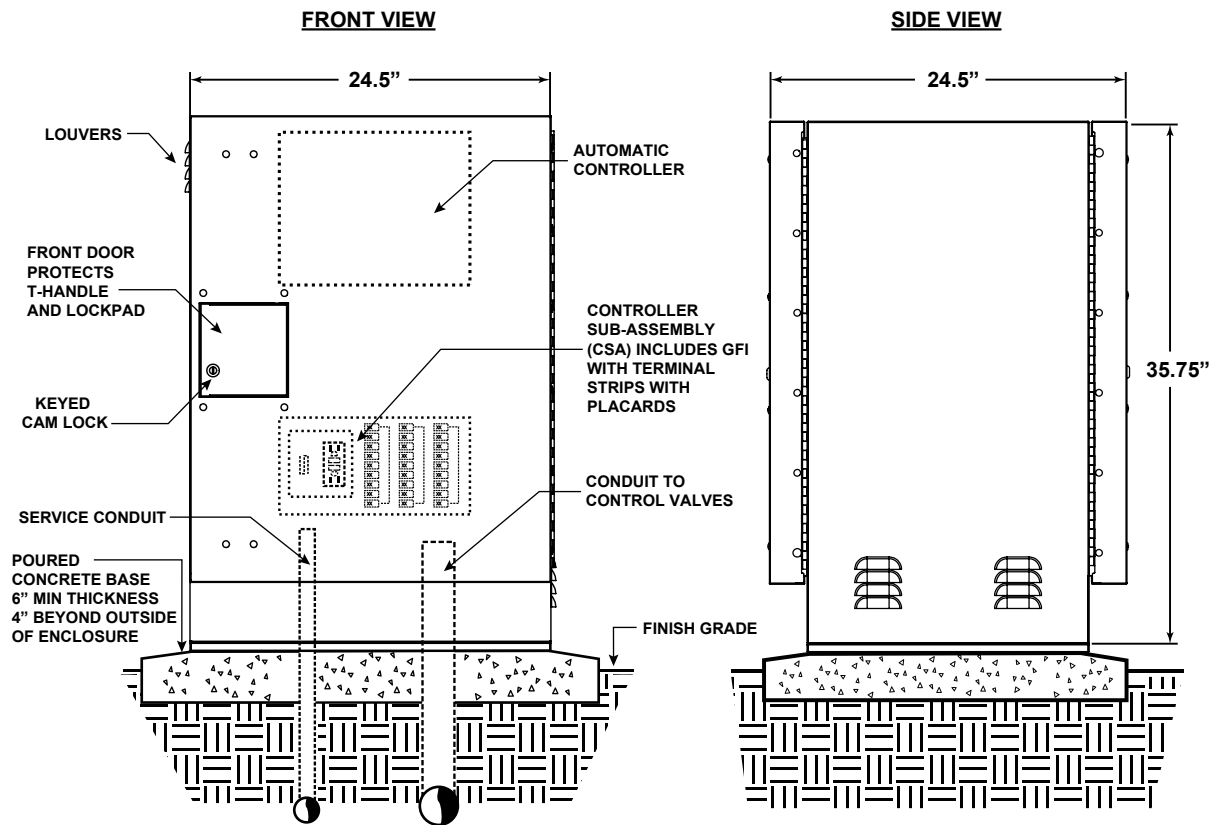

Options for SB-24DSS (for complete accessories, see page 36)



PED-24DSS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 25" x 13" x 19"

Conduit Cutout: 22" x 17"



QP-24D QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 29"

Mounting Pad: 28.5" x 28.5"

Conduit Cutout: 14.5" x 10.5"

SB-16SS

Dimensions	Width	Height	Depth
Overall	16"	38"	17"
Usable Space	13"	26"	14"
Backboard	13"	26"	--
Tray	14.5"	12.5"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Hinged Flip Top with Three-Point Latching System
- Angled Mounting Tray for Ergonomic Control Placement
- Separate Bottom Compartment for Additional Storage
- Standard Tray and Pre-Drilled Removable Backboard Included
- Mounting Template and J Bolt Anchors Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
*DX2	6-48	X
*DX3	8-96	X
*Eagle Plus	8-48	X
*Eagle Plus (Old Style)	8-48	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
*ICC2	8-54	X
*HCC	8-54	X
*ACC	12-42	X
*ACC2	12-54	X
*ICC2	8-54	X
*I-CORE	6-42	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
*CS3000	8-48	X
*ET1	--	X

- X Room for one controller
- * Contact factory for controller specific backboards and trays

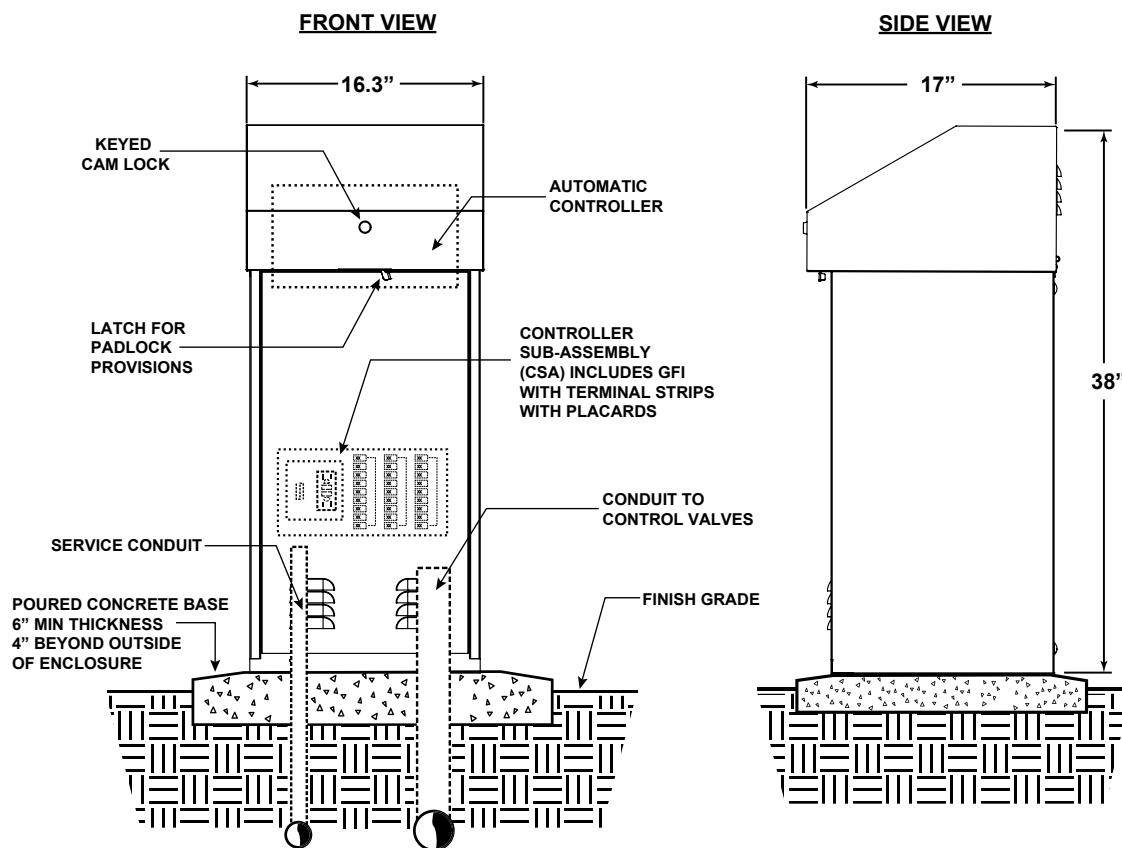

Options for SB-16SS (for complete accessories, see page 36)



PED-16SS PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 16" x 12" x 16"

Conduit Cutout: 13" x 11"




QP-16 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 22"

Mounting Pad: 28.5" x 18.5"

Conduit Cutout: 13.0" x 10.5"



PT-TRAY16-U UNIVERSAL TRAY

Optional Universal Mounting Tray for use with controller specific adapter plates. Contact factory for details

Overall Dims: 15" x 6" x 12"

Universal Cutout: 12.5" x 11"

SB-22SS

Dimensions	Width	Height	Depth
Overall	25"	38"	19"
Usable Space	21"	26"	16"
Backboard	21"	26"	--
Tray	22"	14.5"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Hinged Flip Top with Three-Point Latching System
- Angled Mounting Tray for Ergonomic Control Placement
- Separate Bottom Compartment for Additional Storage
- Standard Tray and Pre-Drilled Removable Backboard Included
- Mounting Template and J Bolt Anchors Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	XX
ESP-TM2	4-12	XX
*DX2	6-48	X
*DX3	8-96	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	X
PRO-HC	6-24	X
*ICC2	8-54	X
*HCC	8-54	X
*ACC2	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	X
SL1600	4-16	XX
SL1620	20	XX
SL 4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
*CS3000	8-48	X

- X Room for one controller
 XX Room for two controllers
 * Contact factory for controller specific backboards and trays

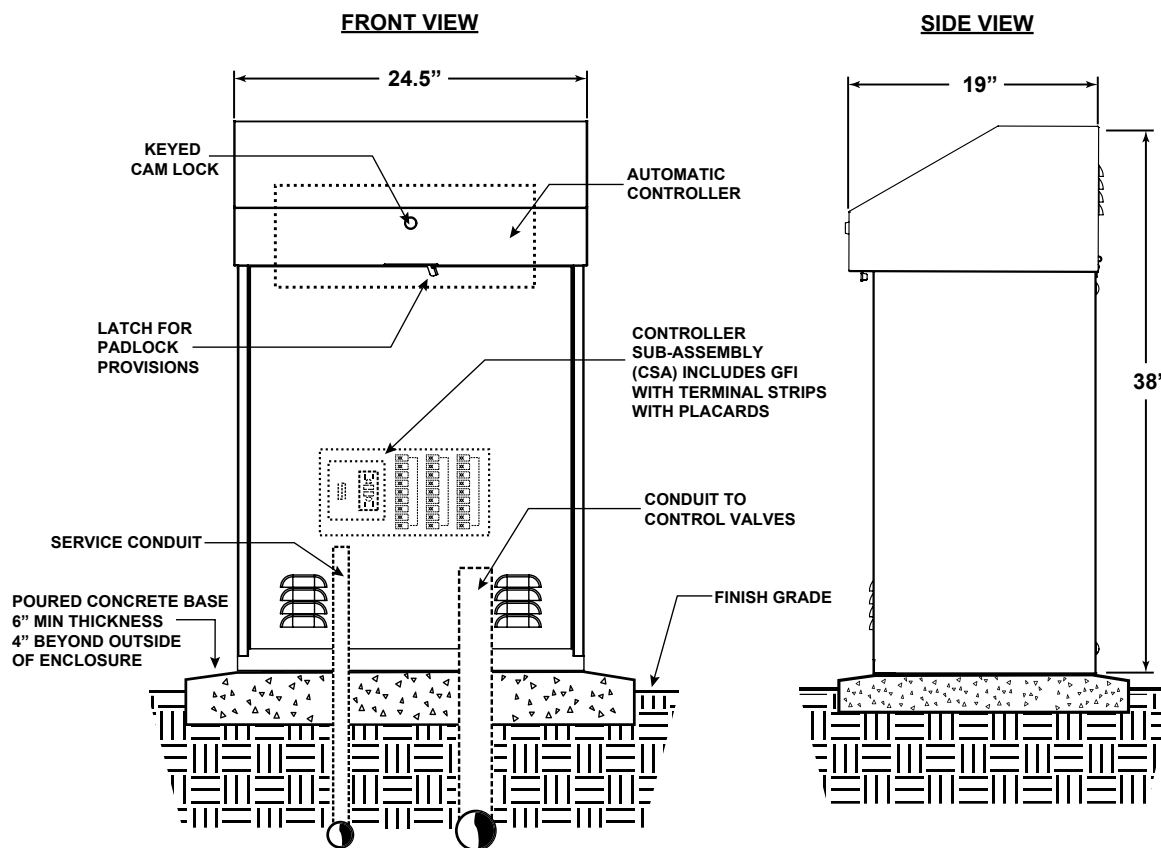

Options for SB-22SS (for complete accessories, see page 36)




QP-22 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 36" x 16" x 22"

Mounting Pad: 28.5" x 18.5"

Conduit Cutout: 14.0" x 10.5"

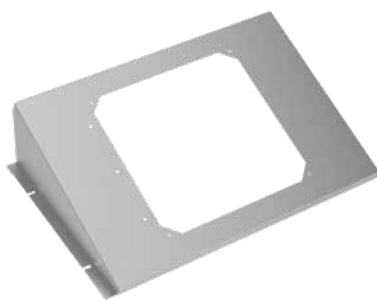

PT-TRAY22-U UNIVERSAL TRAY

Optional Universal Mounting Tray for use with controller specific adapter plates. Contact factory for details

Overall Dims: 22" x 6" x 15"

Universal Cutout: 12.5" x 12"

SB-16SSW

Dimensions	Width	Height	Depth
Overall	16"	18"	11"
Usable Space	16"	14"	7"
Backboard	16"	14"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X

X Room for one controller

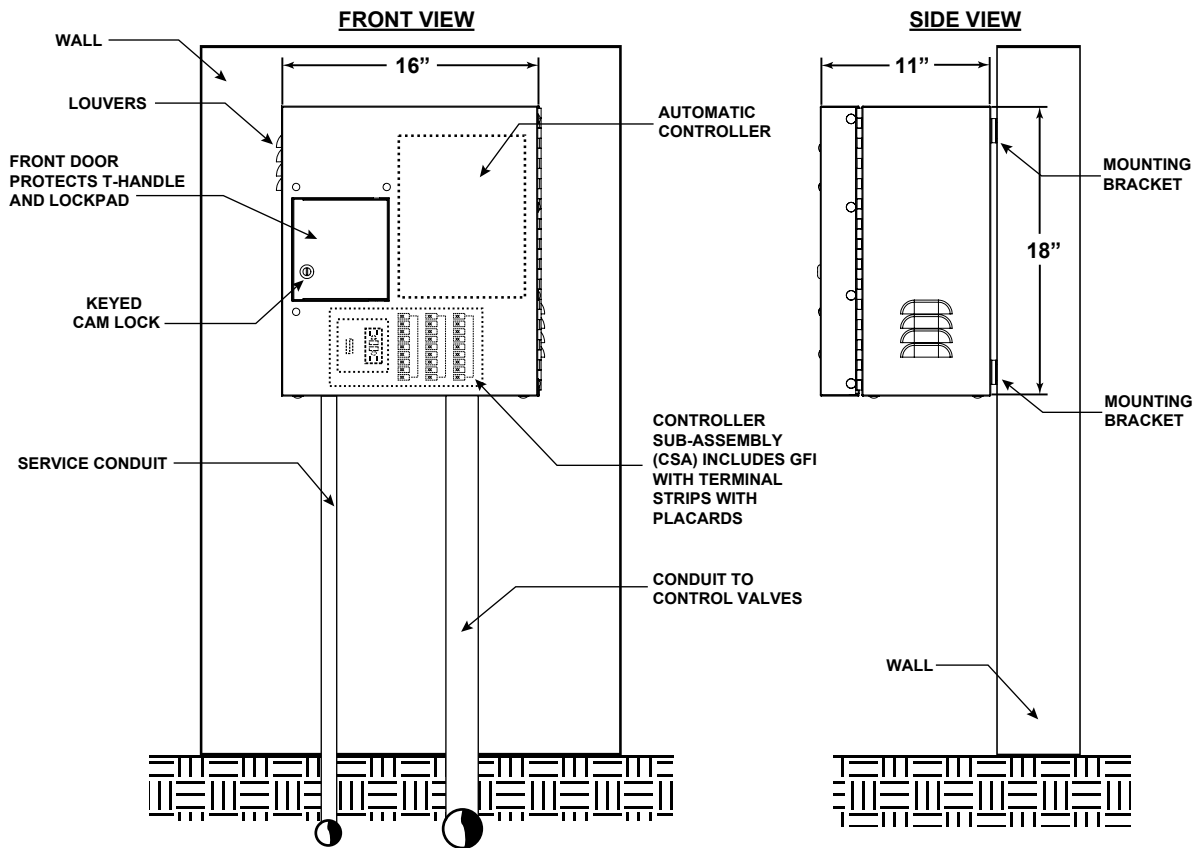

Options for SB-16SSW (for complete accessories, see page 36)



PED-16SSW PEDESTAL RISER

For optional floor mounting. Securely fastens to bottom of enclosure with concealed bolts.

Overall Dims: 16" x 5" x 8"

Conduit Cutout: 13" x 5"

SB-18SSW

Dimensions	Width	Height	Depth
Overall	19"	36"	12"
Usable Space	16"	32"	8"
Backboard	16"	32"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
*DX2	6-48	X
*DX3	8-96	X
*Eagle Plus	8-48	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
*ICC2	8-54	X
*HCC	8-54	X
*ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
PL4800	12-48	X
SL1600	4-16	X
SL1620	20	X
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

- X Room for one controller
- * Contact factory for controller specific backboards and trays

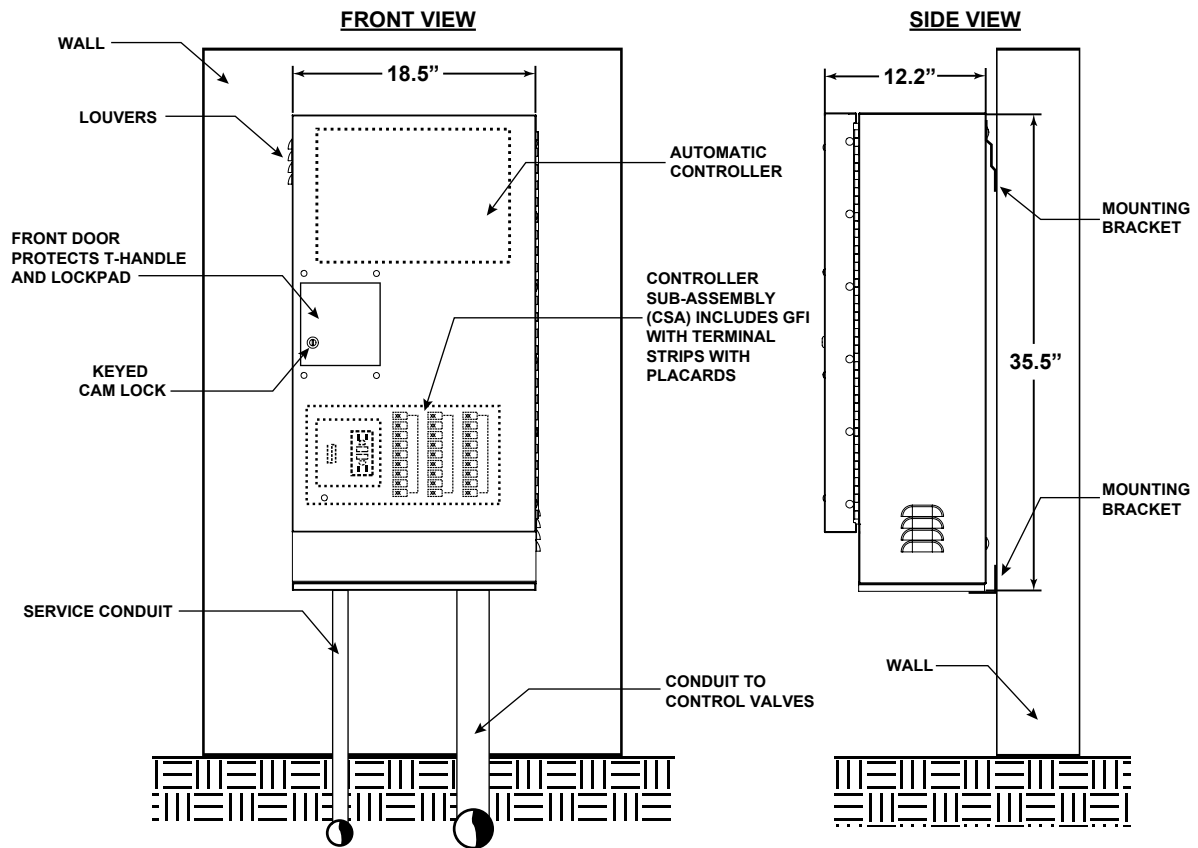

For complete accessories, see page 36

SB-24SSW

Dimensions	Width	Height	Depth
Overall	25"	36"	12"
Usable Space	22"	33"	8"
Backboard	22"	33"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	X
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

X Room for one controller

XX Room for two controllers

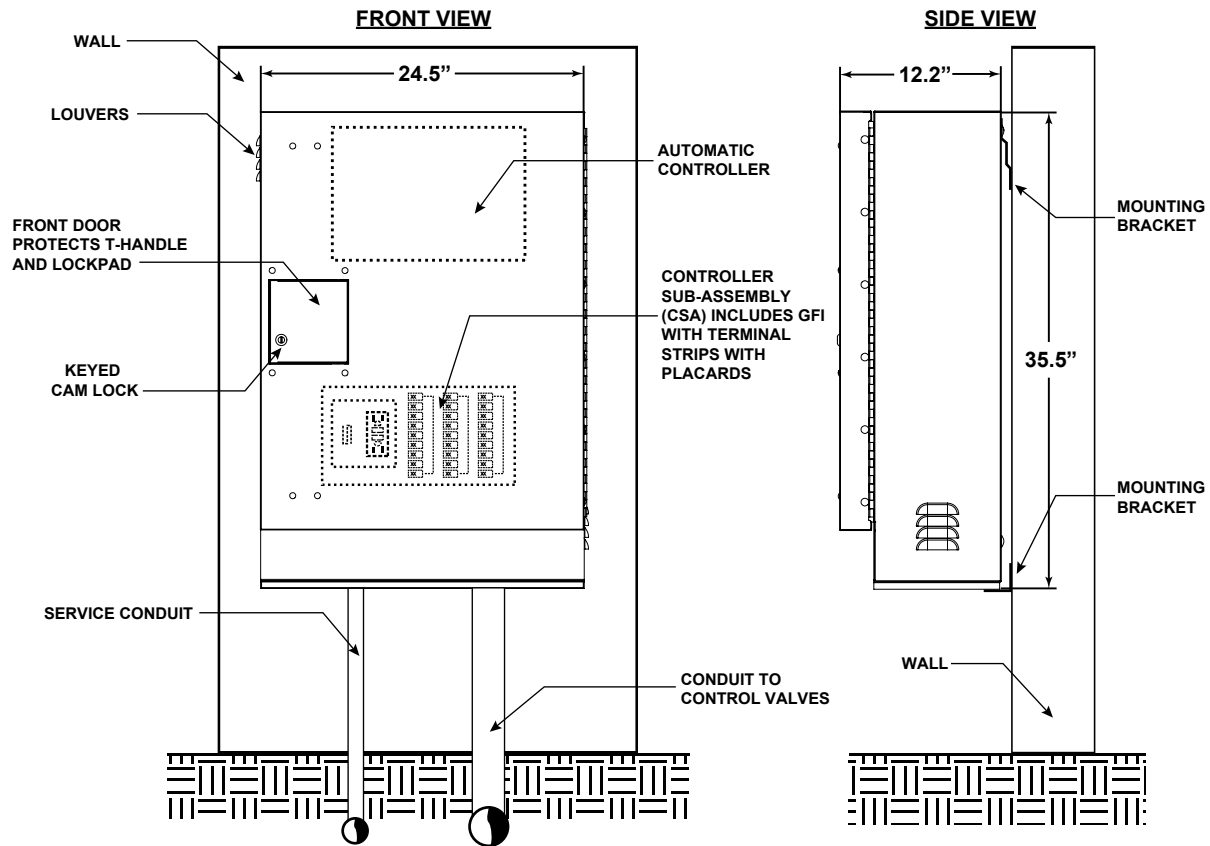

For complete accessories, see page 36

SB-36SSW

Dimensions	Width	Height	Depth
Overall	37"	36"	12"
Usable Space	32"	32"	8"
Backboards (2)	16"	32"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Three Point Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Padlock Security Provisions
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Two Pre-Drilled Removable Backboards Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	XX
CCU-28 (Cluster Control)	28	XX
ESP-SAT	40	XX
ESP-SITE SAT	40	XX
ESP-LXME2	12-48	XX
ESP-LXIVM	60-240	XX
ESP-ME3	4	XX
ESP-TM2	4-12	XX
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	XX
RME Eagle EG	6-36	XX
RME Eagle-I central	6-36	XX
Toro	Stations	Capacity
TMC-424	4-24	XX
Sentinel WallMount	12-48	XX
Irritrol	Stations	Capacity
RainDial Series	6-12	XX
Total Control Series	6-24	XX
MC-E Series	4-48	XX

Hunter	Stations	Capacity
I-Core-600-PL	6	XX
I-Core-600-M	6	XX
PRO-C Series	3-15	XX
X-CORE	2-8	XX
X2	4-14	XX
HPC	4-32	XX
PRO-HC	6-24	XX
* ICC2	8-54	XX
* HCC	8-54	XX
* ACC2 Series	12-54	XX
Weathermatic	Stations	Capacity
PL1600	4-16	XX
PL1620	20	XX
PL4800	12-48	XX
SL1600	4-16	XX
SL1620	20	XX
SL4800	12-48	XX
SL9648TW	48	XX
SL9696TW	96	XX
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	XX
Calsense	Stations	Capacity
CS3000	8-48	XX

XX Room for two controllers

* Contact factory for controller specific backboards and trays

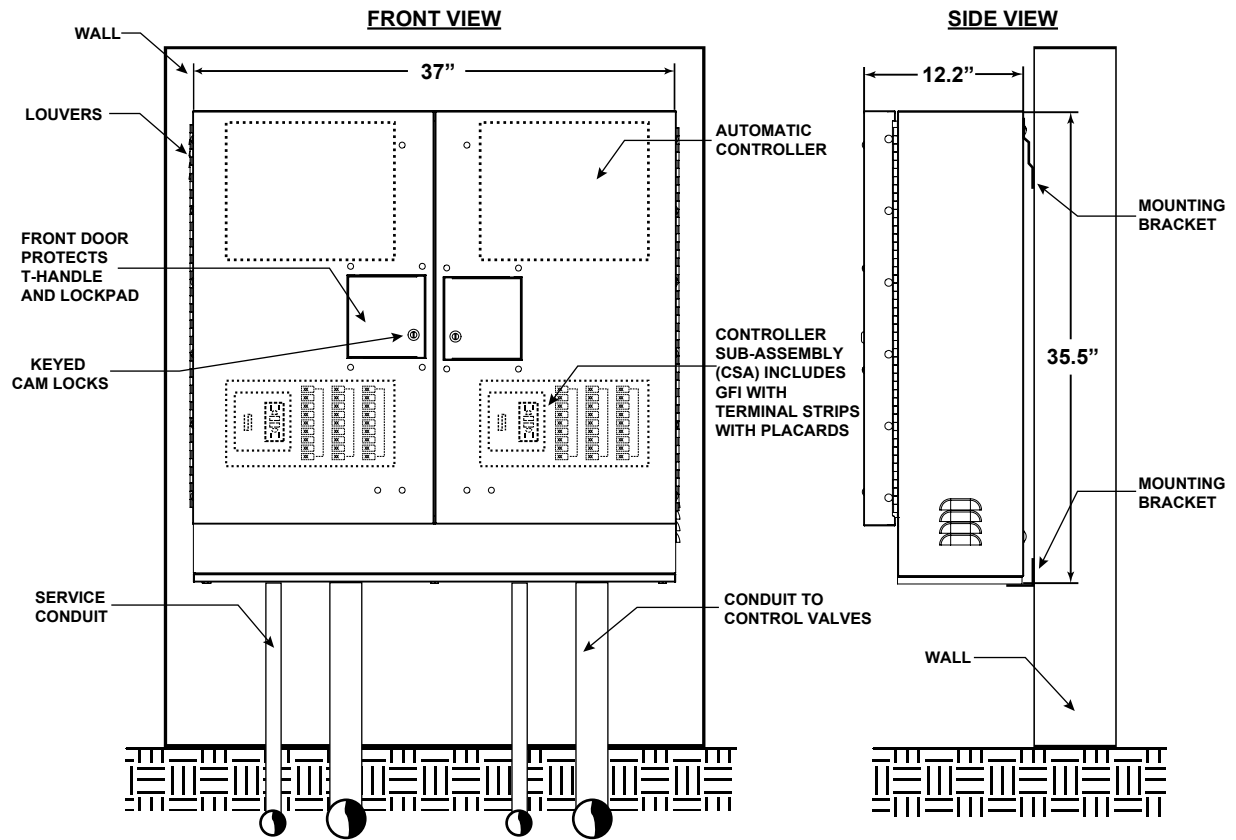

For complete accessories, see page 36

LD-16S

Dimensions	Width	Height	Depth
Overall	17"	30"	8"
Usable Space	15"	27"	7"
Backboard	15"	27"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Flush Mounted Drop-In Key Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Mounting Template and J Bolt Anchors Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X

X Room for one controller

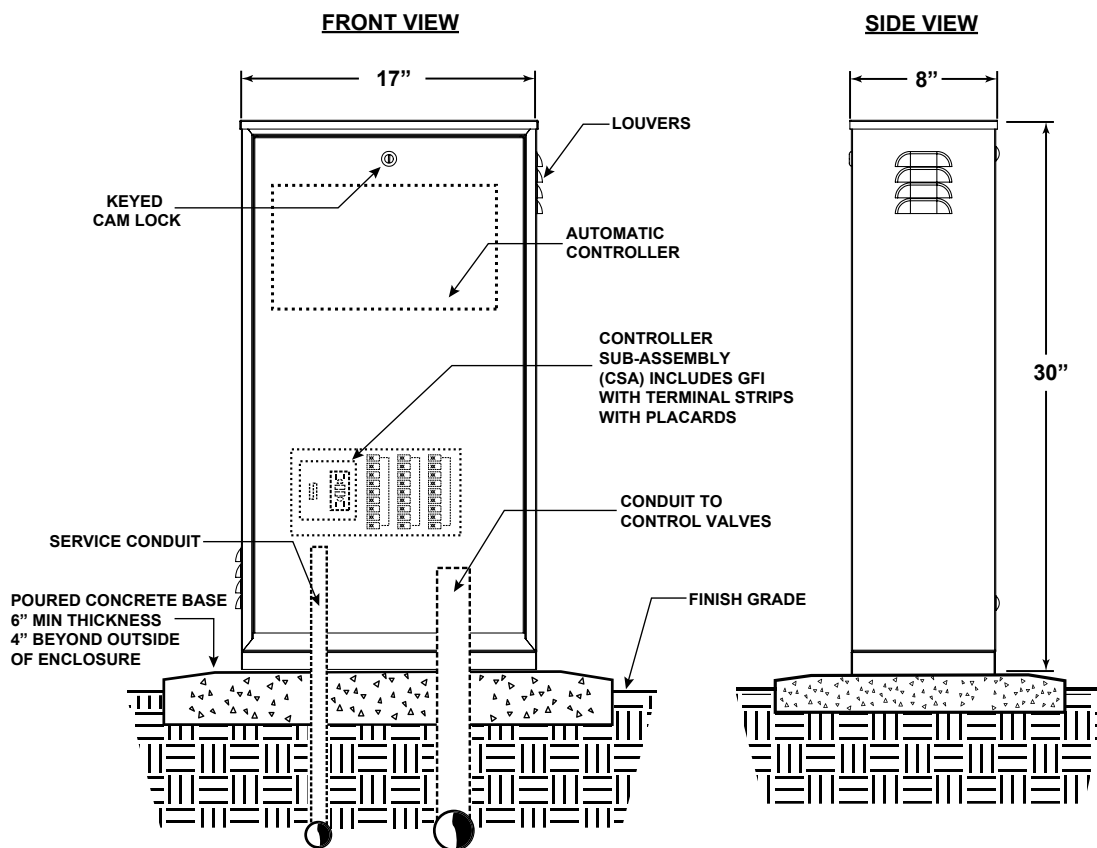

Options for LD-16S (for complete accessories, see page 36)



PED-LD16 PEDESTAL RISER

Bring controls up to a more ergonomic level and prevent flooding damage.

Overall Dims: 17" x 13" x 8"

Conduit Cutout: 14" x 5"



QP-LD16 QUICKPAD™

Fast and secure mounting with no concrete required!

Overall Dims: 21" x 16" x 17"

Mounting Pad: 20" x 17"

Conduit Cutout: 9.5" x 5.0"

WALLMOUNT VERSION AVAILABLE!



LD-16SW WALLMOUNT ENCLOSURE

Wallmount brackets and bottom plate included.

See page 34 for details.

LD-16T

Dimensions	Width	Height	Depth
Overall	17"	19"	9"
Usable Space	15"	17"	9"
Backboard	15"	17"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Hinged Keyed Locking Door
- Bottom Plate included
- Removable Backboard Included
- Bolts on top of LD-16S
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X

X Room for one controller

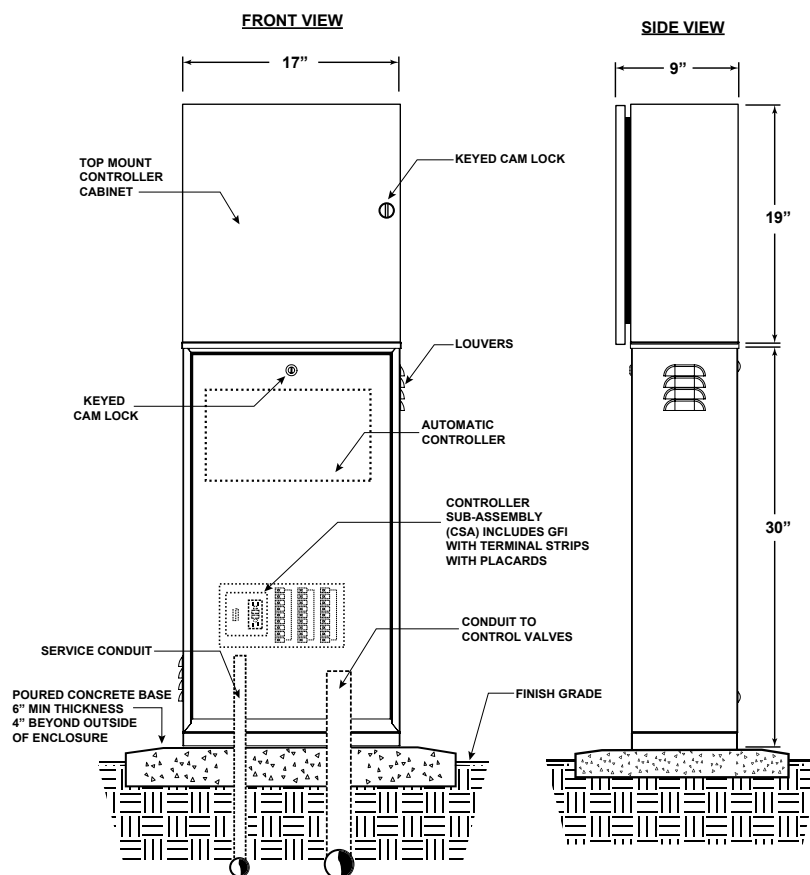

Options for LD-16T (for complete accessories, see page 36)



LD-16S

COMPANION ENCLOSURE

LD-16T attaches to the top of the LD-16S for additional storage space.

Overall Dims: 17" x 30" x 8"

Usable Dims: 15" x 27" x 7"

Backboard: 15" x 27"

LD-18SW

Dimensions	Width	Height	Depth
Overall	19"	19"	8"
Usable Space	17"	17"	7"
Backboard	17"	17"	--



Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Keyed Cam Style Lock
- Lift-Off Stainless Steel Hinges
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
DX2	6-48	X
DX3	8-96	X
Eagle Plus	8-48	X
Toro	Stations	Capacity
TMC-424	4-24	X
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
I-Core-600-M	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
ACC2 Series	12-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
PL4800	12-48	X
SL1600	4-16	X
SL1620	20	X
SL4800	12-48	X
SL9648TW	48	X
SL9696TW	96	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X
Calsense	Stations	Capacity
CS3000	8-48	X

X Room for one controller

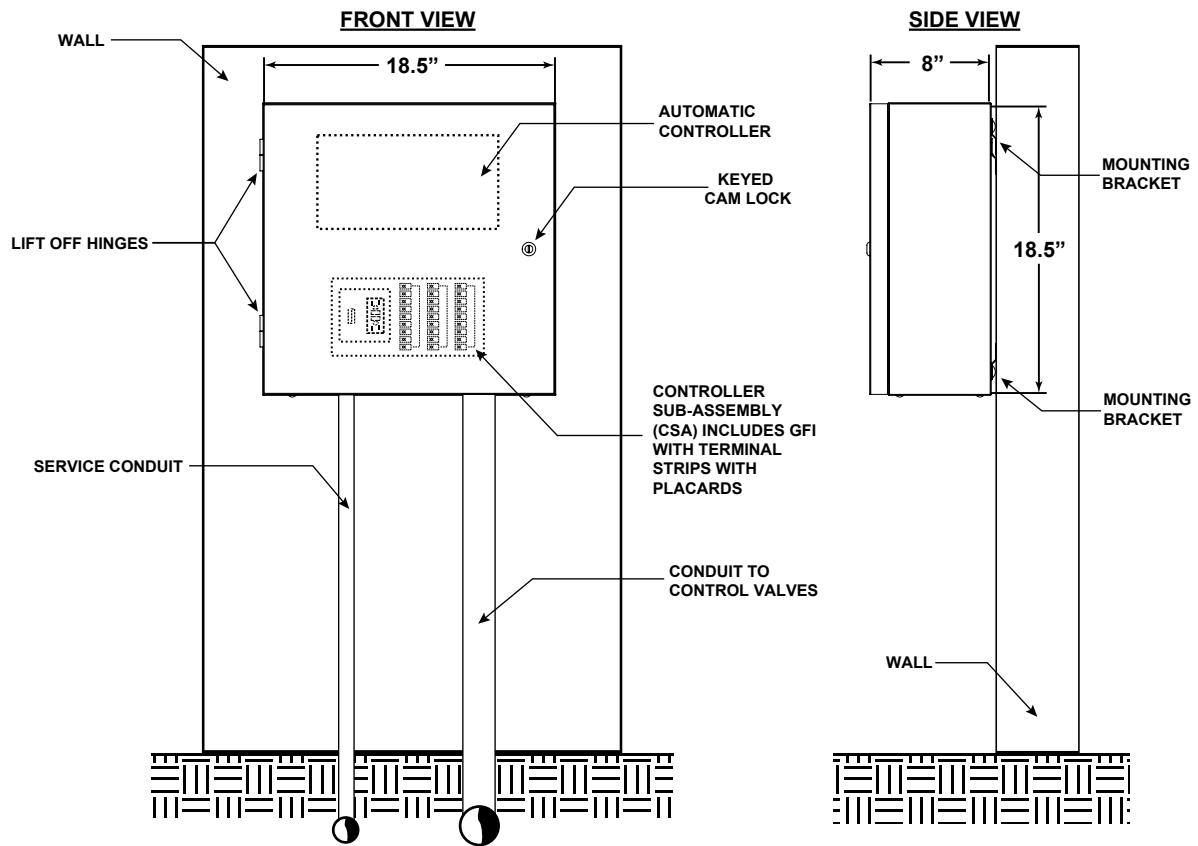

For complete accessories, see page 36

LD-16SW

Dimensions	Width	Height	Depth
Overall	17"	30"	8"
Usable Space	15"	27"	8"
Backboard	15"	27"	--

Features and Benefits

- 100% Stainless Steel
- NEMA Type 3R Weatherproof
- Hinged Keyed Locking Door
- Filtered Side Louvers on Top and Bottom for Cross Ventilation
- Mounting Brackets and Conduit Ready Bottom Plate Included
- Pre-Drilled Removable Backboard Included
- 10-Year Limited Warranty




Compatible Controllers (This chart displays the most commonly used controllers)

RainBird	Stations	Capacity
ESP-TM	4-8	X
CCU-28 (Cluster Control)	28	X
ESP-SAT	40	X
ESP-SITE SAT	40	X
ESP-LXME2	12-48	X
ESP-LXIVM	60-240	X
ESP-ME3	4	X
ESP-TM2	4-12	X
RainMasters	Stations	Capacity
RME Sentar II SE	6-36	X
RME Eagle EG	6-36	X
RME Eagle-I central	6-36	X
Toro	Stations	Capacity
Sentinel WallMount	12-48	X
Irritrol	Stations	Capacity
RainDial Series	6-12	X
Total Control Series	6-24	X
MC-E Series	4-48	X

Hunter	Stations	Capacity
I-Core-600-PL	6	X
PRO-C Series	3-15	X
X-CORE	2-8	X
X2	4-14	X
HPC	4-32	X
PRO-HC	6-24	X
ICC2	8-54	X
HCC	8-54	X
Weathermatic	Stations	Capacity
PL1600	4-16	X
PL1620	20	X
SL1600	4-16	X
SL1620	20	X
HydroPoint	Stations	Capacity
WeatherTRAK LC+	6-36	X

X Room for one controller

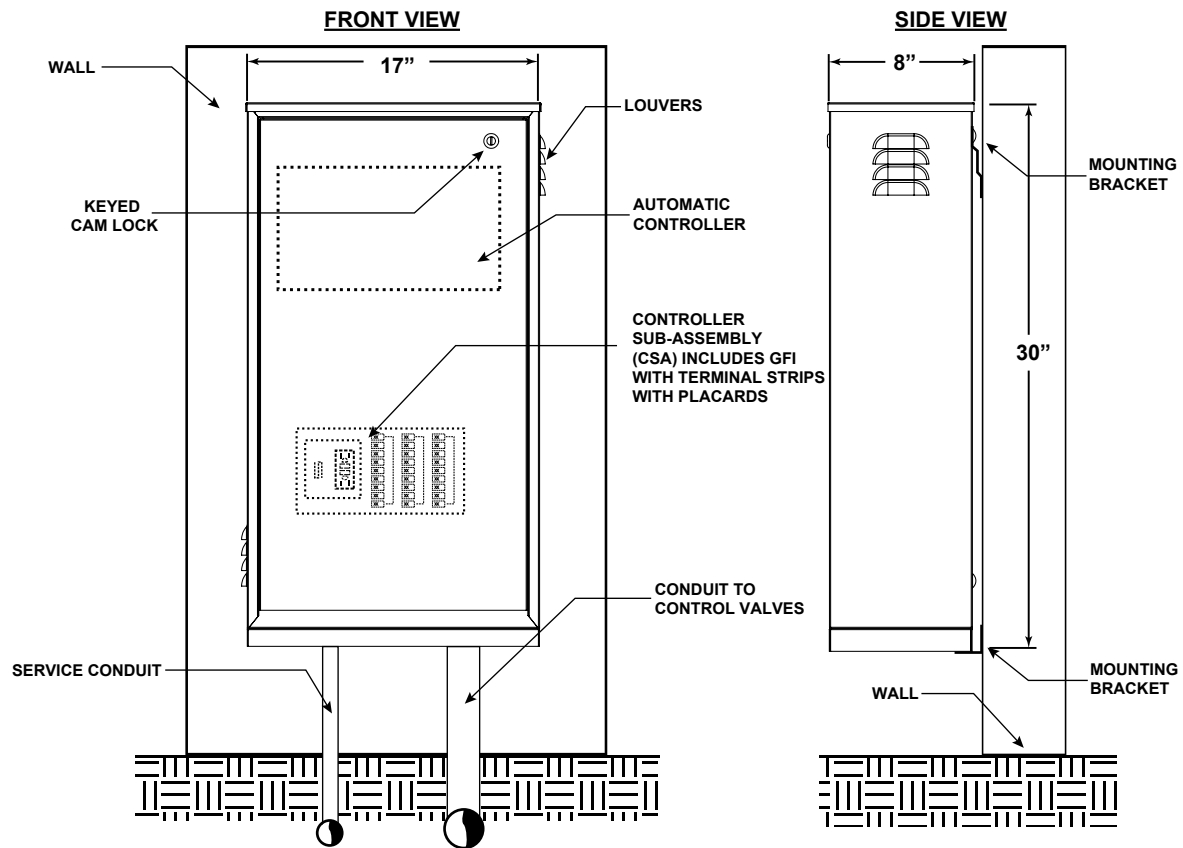

For complete accessories, see page 36

QUICK PAD™

Easily and securely install your StrongBox Enclosure with no concrete required.



Part Number	Description
QP-16	Used for SB-16SS
QP-18	Used for SB-18SS SB-1852SS
QP-22	Used for SB-22SS
QP-24	Used for SB-24SS
QP-18D	Used for SB-18DSS
QP-24D	Used for SB-24DSS
QP-LD16	Used for LD-16S

PEDESTAL RISERS


Brings controls up to a more ergonomic height and prevents flood damage in high risk areas.



Part Number	Description
PED-16SS	Used for SB-16SS
PED-18SS	Used for SB-18SS SB-1852SS
PED-24SS	Used for SB-24SS
PED-36SS	Used for SB-36SS
PED-18DSS	Used for SB-18DSS
PED-24DSS	Used for SB-24DSS
PED-16SSW	Used for SB-16SSW
PED-LD16	Used for LD-16S

BACKBOARDS, TRAYS & KITS

Pre-drilled stainless steel backboards and trays. For complete list of controller specific mounting options, visit strongbox.com

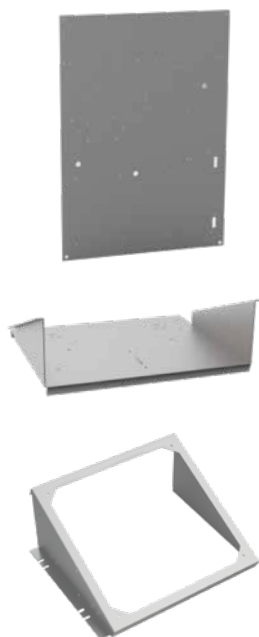

Part Number	Description
BB-16SS	Used for SB-16SS
BB-18SS	Used for SB-18SS SB-18SSW SB-18DSS SB-36SS SB-36SSW
BB-1852SS	Used for SB-1852SS
BB-22SS	Used for SB-22SS
BB-24SS	Used for SB-24SS SB-24DSS SB-24SSW
BB-16SSW	Used for SB-16SSW
BB-LD16	Used for LD-16S LD-16SW
BB-16TLD	Used for LD-16T
BB-18LD	Used for LD-18SW
PT-TRAY16	Tray for SB-16SS
PT-TRAY16-U	Universal Tray for SB-16SS. Contact factory for controller adapter plates
PT-22TRAY	Tray for SB-22SS
PT-TRAY22-U	Universal Tray for SB-22SS. Contact factory for controller adapter plates
OPT-DX2	Complete Kit for mounting Rain Master DX2 Controller in SB-16SS (top entry)
OPT-DX18	Complete Kit for mounting Rain Master DX2 Controller in SB-18SS (front entry)
OPT-DX3-SB18SS	Complete Kit for mounting Rain Master DX3 Controller in SB-18SS (front entry)
OPT-22SS-DX3	Complete Kit for mounting Rain Master DX2 Controller in SB-22SS (top entry)
OPT-HUN-ACC	Complete Kit for mounting Hunter ACC Controller in SB-16SS (top entry)
OPT-HUN-ACC2	Complete Kit for mounting Hunter ACC2 Controller in SB-16SS (top entry)
OPT-HUN-ICC2	Complete Kit for mounting Hunter ICC2 Controller in SB-16SS (top entry)
OPT-HUN-CORE	Complete Kit for mounting Hunter I-CORE Controller in SB-16SS (top entry)

MISC ACCESSORIES

Helpful accessories and components for a variety of uses and installations.



Part Number	Description
CSA / CSA-52	Duplex box with receptacle and locking switch 36 Stations or 52 Stations
OPT-FAN	Thermostatically controlled fan to help maintain temperature
RGVRSS / RGVRSS-P	Designed to protect rain switches from vandalism
SRSE	Designed to protect solar sync switches